

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C



D

E


F

G


H

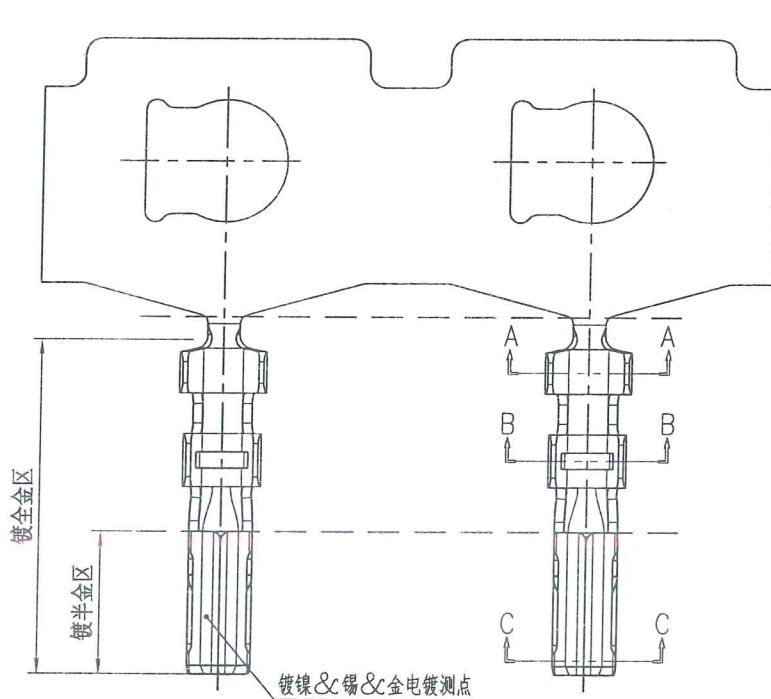


SEC:A-A



SEC:C-C



SEC:B-B

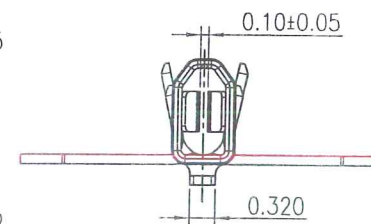

Note: 11007TOP-XX-NK

No Mark

Finish
0A--Gold-flash
0B--2u"
0C--3u"
0D--4u"
0E--5u"
0F--10u"
0G--15u"
0H--30u"
0I--50u"
5A--Gold-flash
5C--3u"
5D--4u"

Qty/reel

11007TOP-2E-NK	AWG #28~#32	0.80mm(max)	Phosphor Bronze	Tin-Plated	20,000 pcs
11007TOP-0A-NK	AWG #28~#32	0.80mm(max)	Phosphor Bronze	Gold-plated 0.8u" on contact area	20,000 pcs
11007TOP-0C-NK	AWG #28~#32	0.80mm(max)	Phosphor Bronze	Gold-plated 3u" on contact area	20,000 pcs
11007TOP-3E-NK	AWG #28~#32	0.80mm(max)	Phosphor Bronze	Matte Tin plated	20,000 pcs
11007TOP-5C-NK	AWG #28~#32	0.80mm(max)	Phosphor Bronze	Gold-plated 3u" on contact, other Gold-flash	20,000 pcs
11007TOP-5D-NK	AWG #28~#32	0.80mm(max)	Phosphor Bronze	Gold-plated 4u" on contact, other Gold-flash	20,000 pcs
11007TOP-5A-NK	AWG #28~#32	0.80mm(max)	Phosphor Bronze	Gold-flash on All	20,000 pcs

C4

C5

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART NO:	DWG. NO:	JCTC® TERMINAL&CONNECTORS
C3	变更公司名称	17.03.27	LINEAR	1:1	张振坤	11.01.17	11007TOP-XX-NK	ENDE05	
C4	依TN1709280140设变	17.09.29	0.0±0.25	APPROVED	张振坤	20.09.10			
C5	依TN1809140180新增规格	18.09.14	0.00±0.15	DESIGNER	张振坤	20.09.10			
C6	HN2009100250	20.09.10	0.000±0.08	DRAWN	张振坤	20.09.10			
			X° REF±G°						
			UNIT: MM						
			SIZE: A4						
			X° X'±2°						

REV: C6 SHEET: 1/1

1 2 3 4 5 6 7 8

RoHS

SPECIFICATIONS

Current Rating: 1A AC,DC


Voltage Rating: 50V AC,DC

Withstanding Voltage: 250V AC/minute

Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min.





Temperature Range: -25°C ~ +85°C

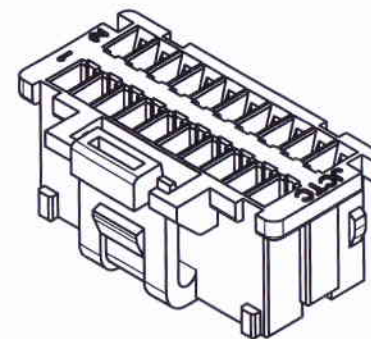

Circuit 2

Circuit 1

Mark

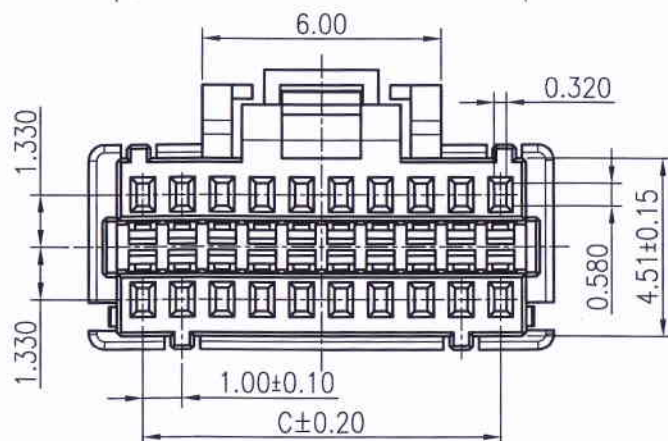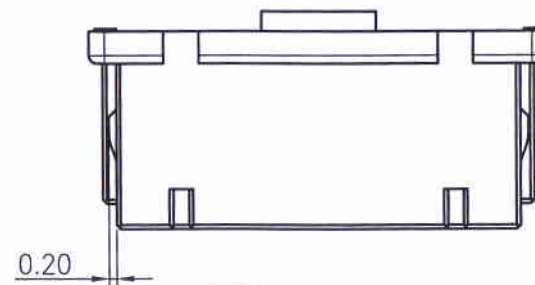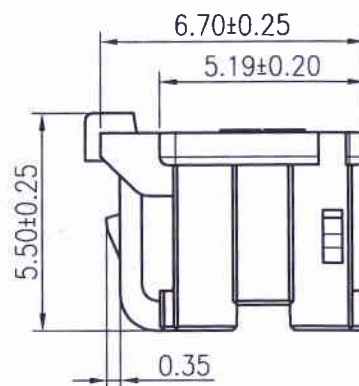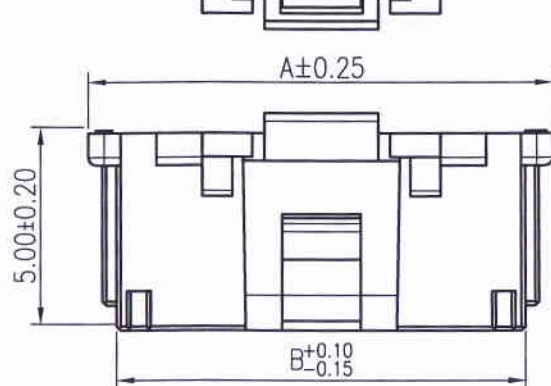

11007H00-2xNPX-L-HF

① ② ③ ④ ⑤ ⑥

- ① Series No.
② H90 : Side Contact
H00 : Up Contact
③ No. of Circuits
④ X : Product color(A--Y)
Blank : Natural type
⑤ L : With Lock
⑥ HF : Halogen Free



Circuit No.	Dimensions		
	A	B	C
2x10P	11.70	10.30	9.00
2x15P	16.70	15.30	14.00
2x20P	21.70	20.30	19.00
2x25P	26.70	25.30	24.00

Suitable for JCTC 11007 series terminal

Part No.	Material	Color
11007H00-2xNP-L-HF	Nylon 66,UL94V-0	Natural(White)
11007H00-2xNPJ-L-HF	Nylon 66,UL94V-0	Gray
11007H00-2xNPA-L-HF	Nylon 66,UL94V-0	Black

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE
				LINEAR	ANGLES	1:1		
C0	换图框发行	12.02.04		0.0±0.25	X° REF±6°	APPROVED		2017.03.27
C1	新增本色规格	14.03.26		0.00±0.15	X° ±3°	DESIGNER		2017.03.27
C2	新增黑色规格	16.05.05	UNIT: MM	0.000±0.08	X° X'±2°	DRAWN	卢小锋	17.03.27
C3	变更公司名称	17.03.27	SIZE: A4					


JCTC® 胜蓝科技股份有限公司
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司






TITLE: Molex 501189 DUAL ROW
1.00mm PITCH HOUSING

PART. NO:
11007H00-2xNPJ-L-XX

DWG. NO:
ENDE05

REV: C3 SHEET: 1/1

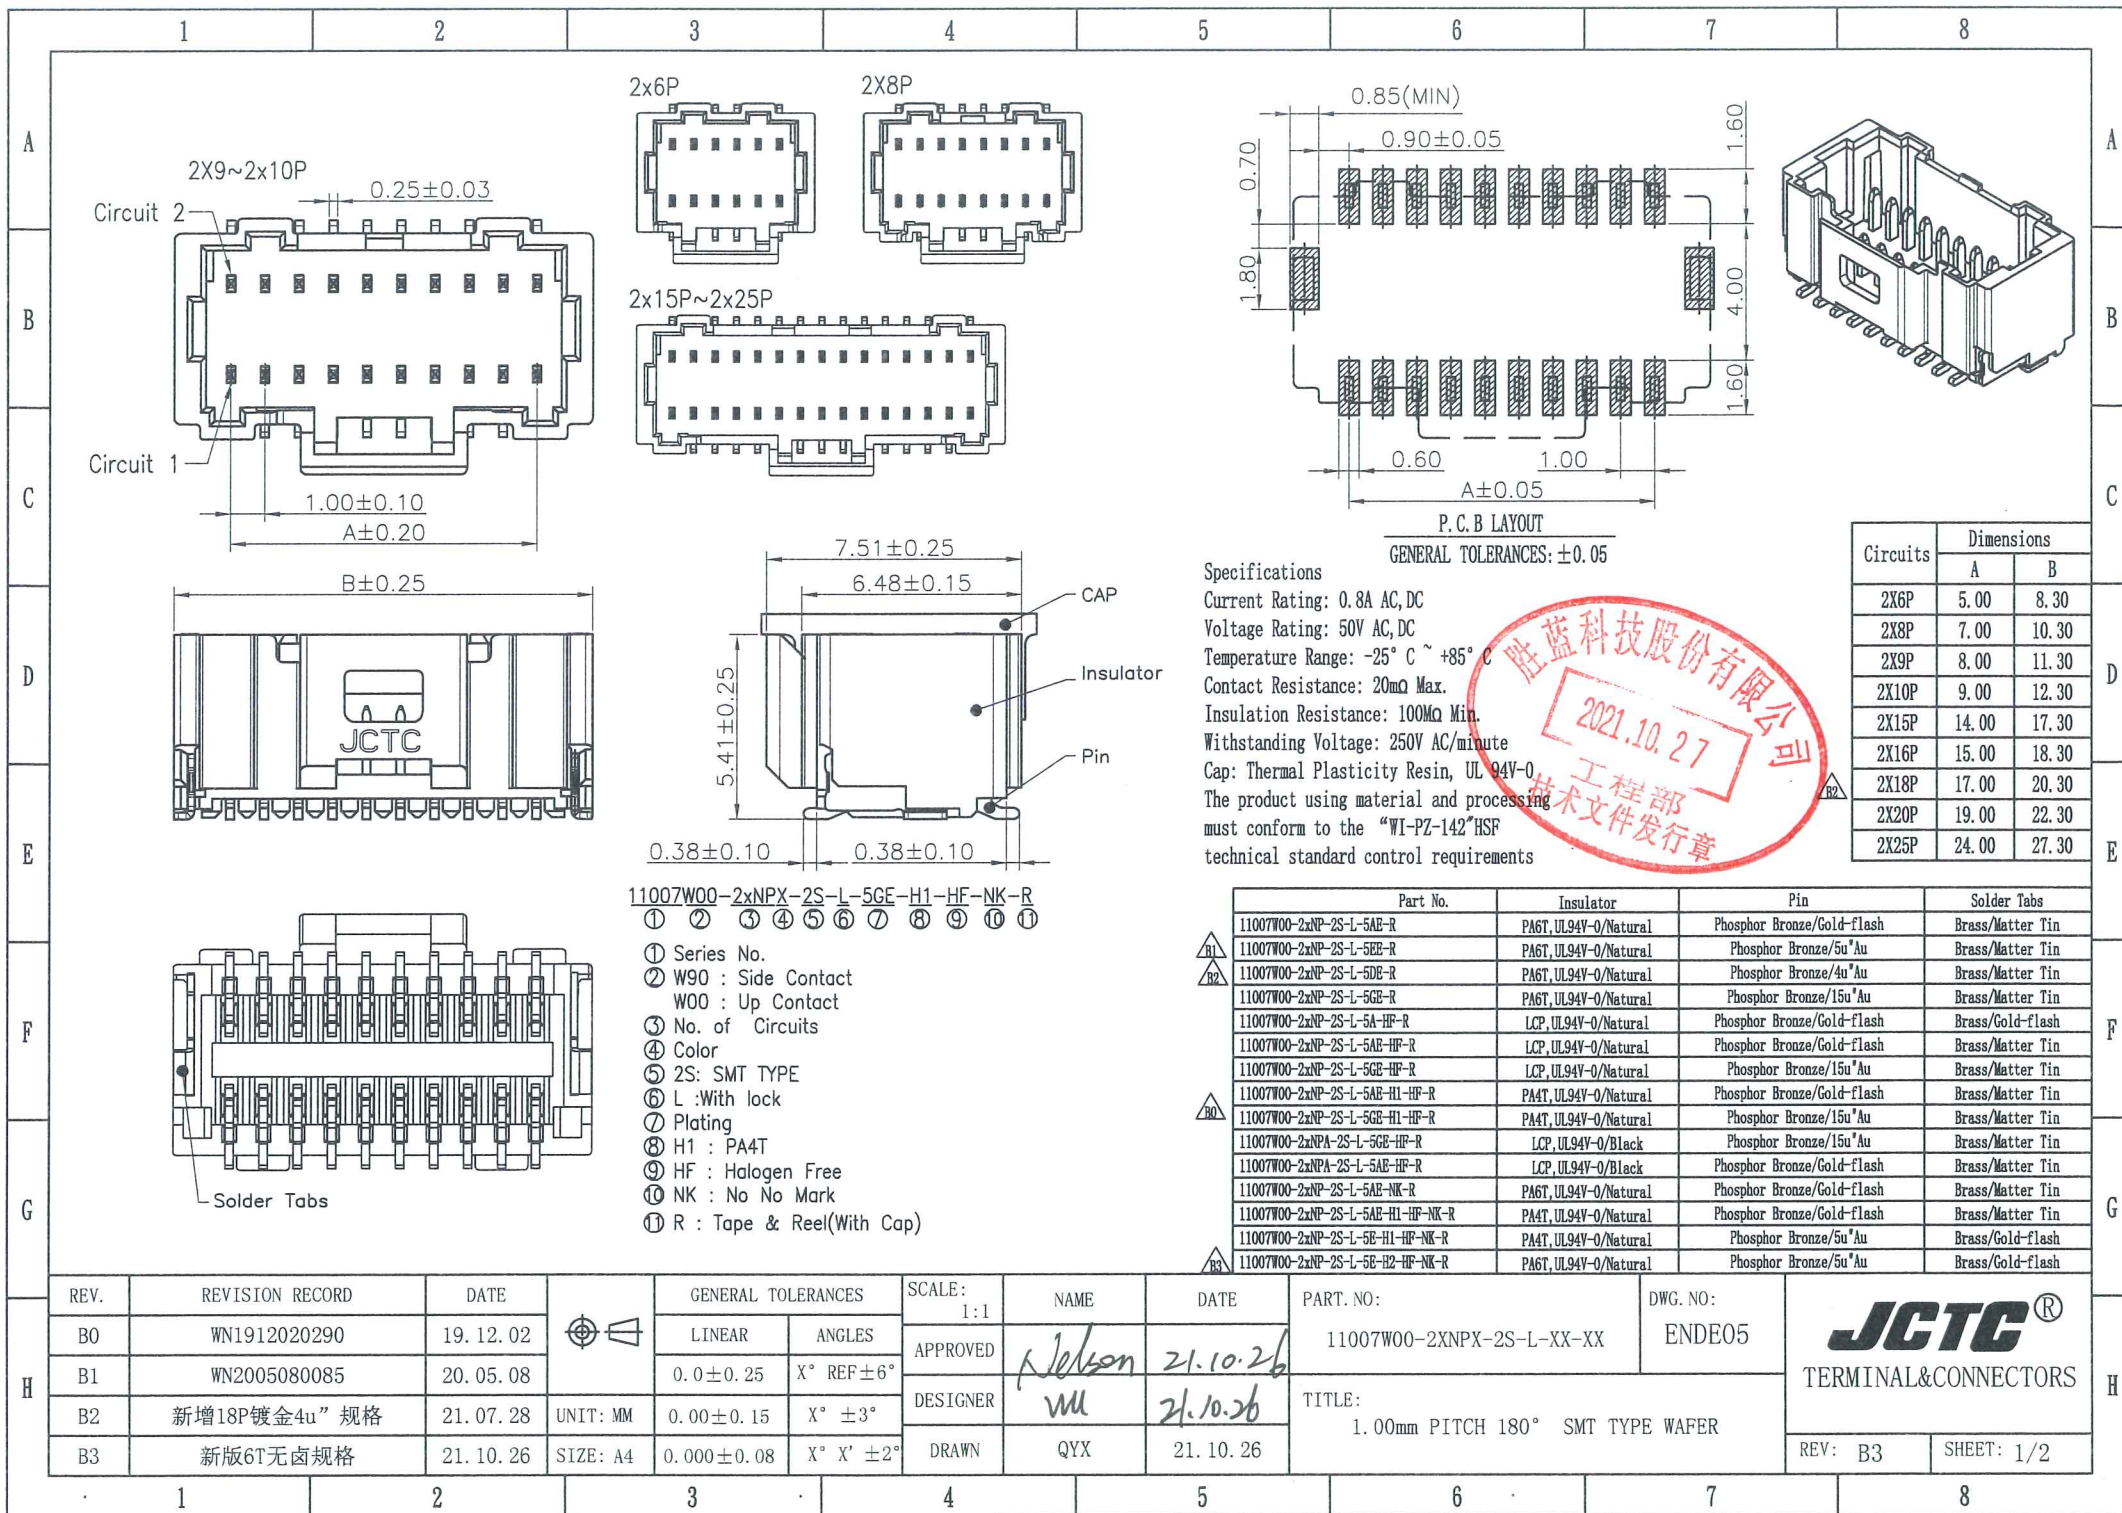

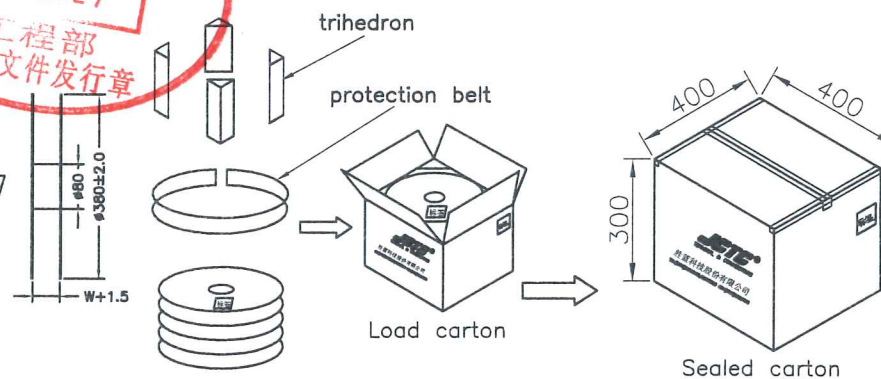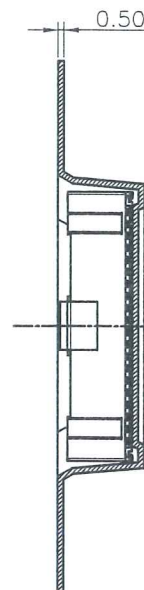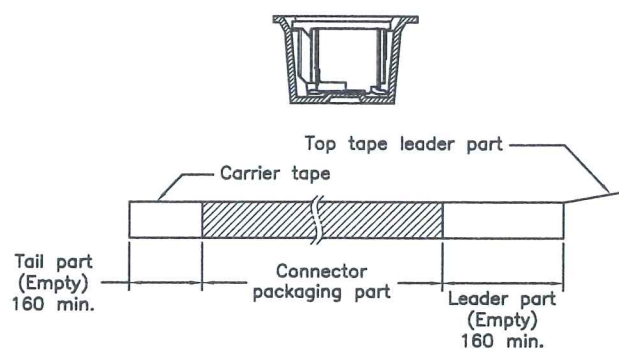

Number of Contacts	W±0.3	F±0.1	S±0.1	Pcs/Reel	Pcs/Box
2X6P~2x10P	24	11.50	—	1,000	1,000
2X15P~2X18P	32	14.20	28.40	1,000	8,000
2X20P~2X25P	44	20.20	40.40	1,000	6,000

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	JCTC[®] TERMINAL&CONNECTORS
B0	WN1912020290	19.12.02 <th>LINEAR</th> <th>ANGLES</th> <th>APPROVED</th> <td>Nelson</td> <td>21.10.26</td> <td>11007W00-2xNPX-2S-L-XX-XX</td> <td>ENDE05</td>		LINEAR	ANGLES	APPROVED	Nelson	21.10.26			
B1	WN2005080085	20.05.08		0.0±0.25	X° REF±6°	DESIGNER	MM	21.10.26	TITLE		
B2	新增18P镀金4u" 规格	21.07.28		UNIT: MM	0.00±0.15	X° ±3°			1.00mm PITCH 180° SMT TYPE WAFER		
B3	新版6T无卤规格	21.10.26		SIZE: A4	0.000±0.08	X° X' ±2°	DRAWN	QYX	21.10.26		
											REV B3 SHEET 2/2