




4 5

胜蓝科技股份有限公司


2016.08.18

工程部
技术文件发行章

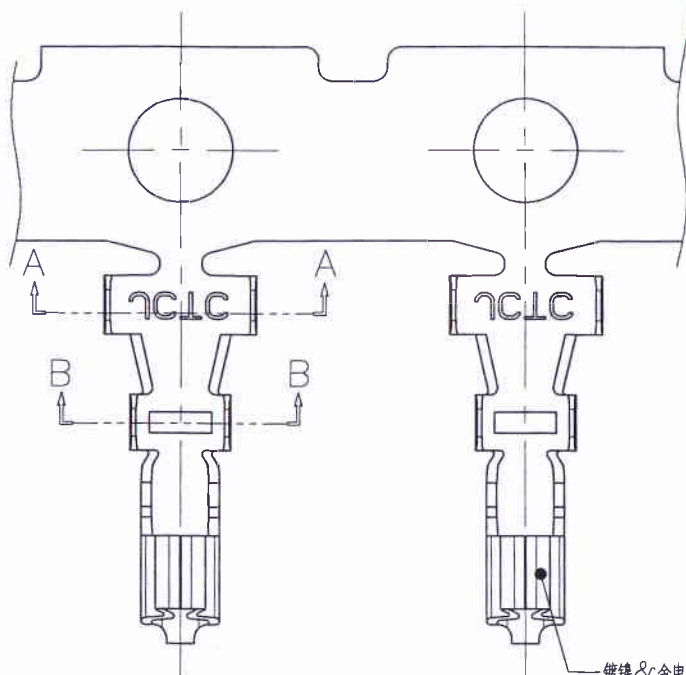


Note: 11500TOP-XX

Finish _____		
2E--Stamping before Tin-plated		
0A--Gold-flash	0B--2u"	0C--3u"
0D--4u"	0E--5u"	0F--10u"
0G--15u"	0H--30u"	0I--50u"



Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
11500TOP-2E	AWG#24~#30	1.10mm(max)	Phosphor Bronze	TIN-plated	15,000 pcs
11500TOP-0X	AWG#24~#30	1.10mm(max)	Phosphor Bronze	Gold-plated contact area	15,000 pcs

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子	PART. NO:	
C0	新图面发行	11.06.09		LINEAR	ANGLES	APPROVED		16.08.16		DWG. NO:	
C1	新增电镀规格	13.06.13		0.0±0.25	X° REF ±6°	DESIGNER	汪文松	16.08.16		ENDE05	
C2	TN1310230182	13.10.28		UNIT: MM	0.00±0.15	X° ±3°	DRAWN	邓群庄		16.08.16	TITLE: 1.50mm PITCH TERMINAL
C3	TN1608160122	16.08.16		SIZE: A4	0.000±0.08	X° X' ±2°					

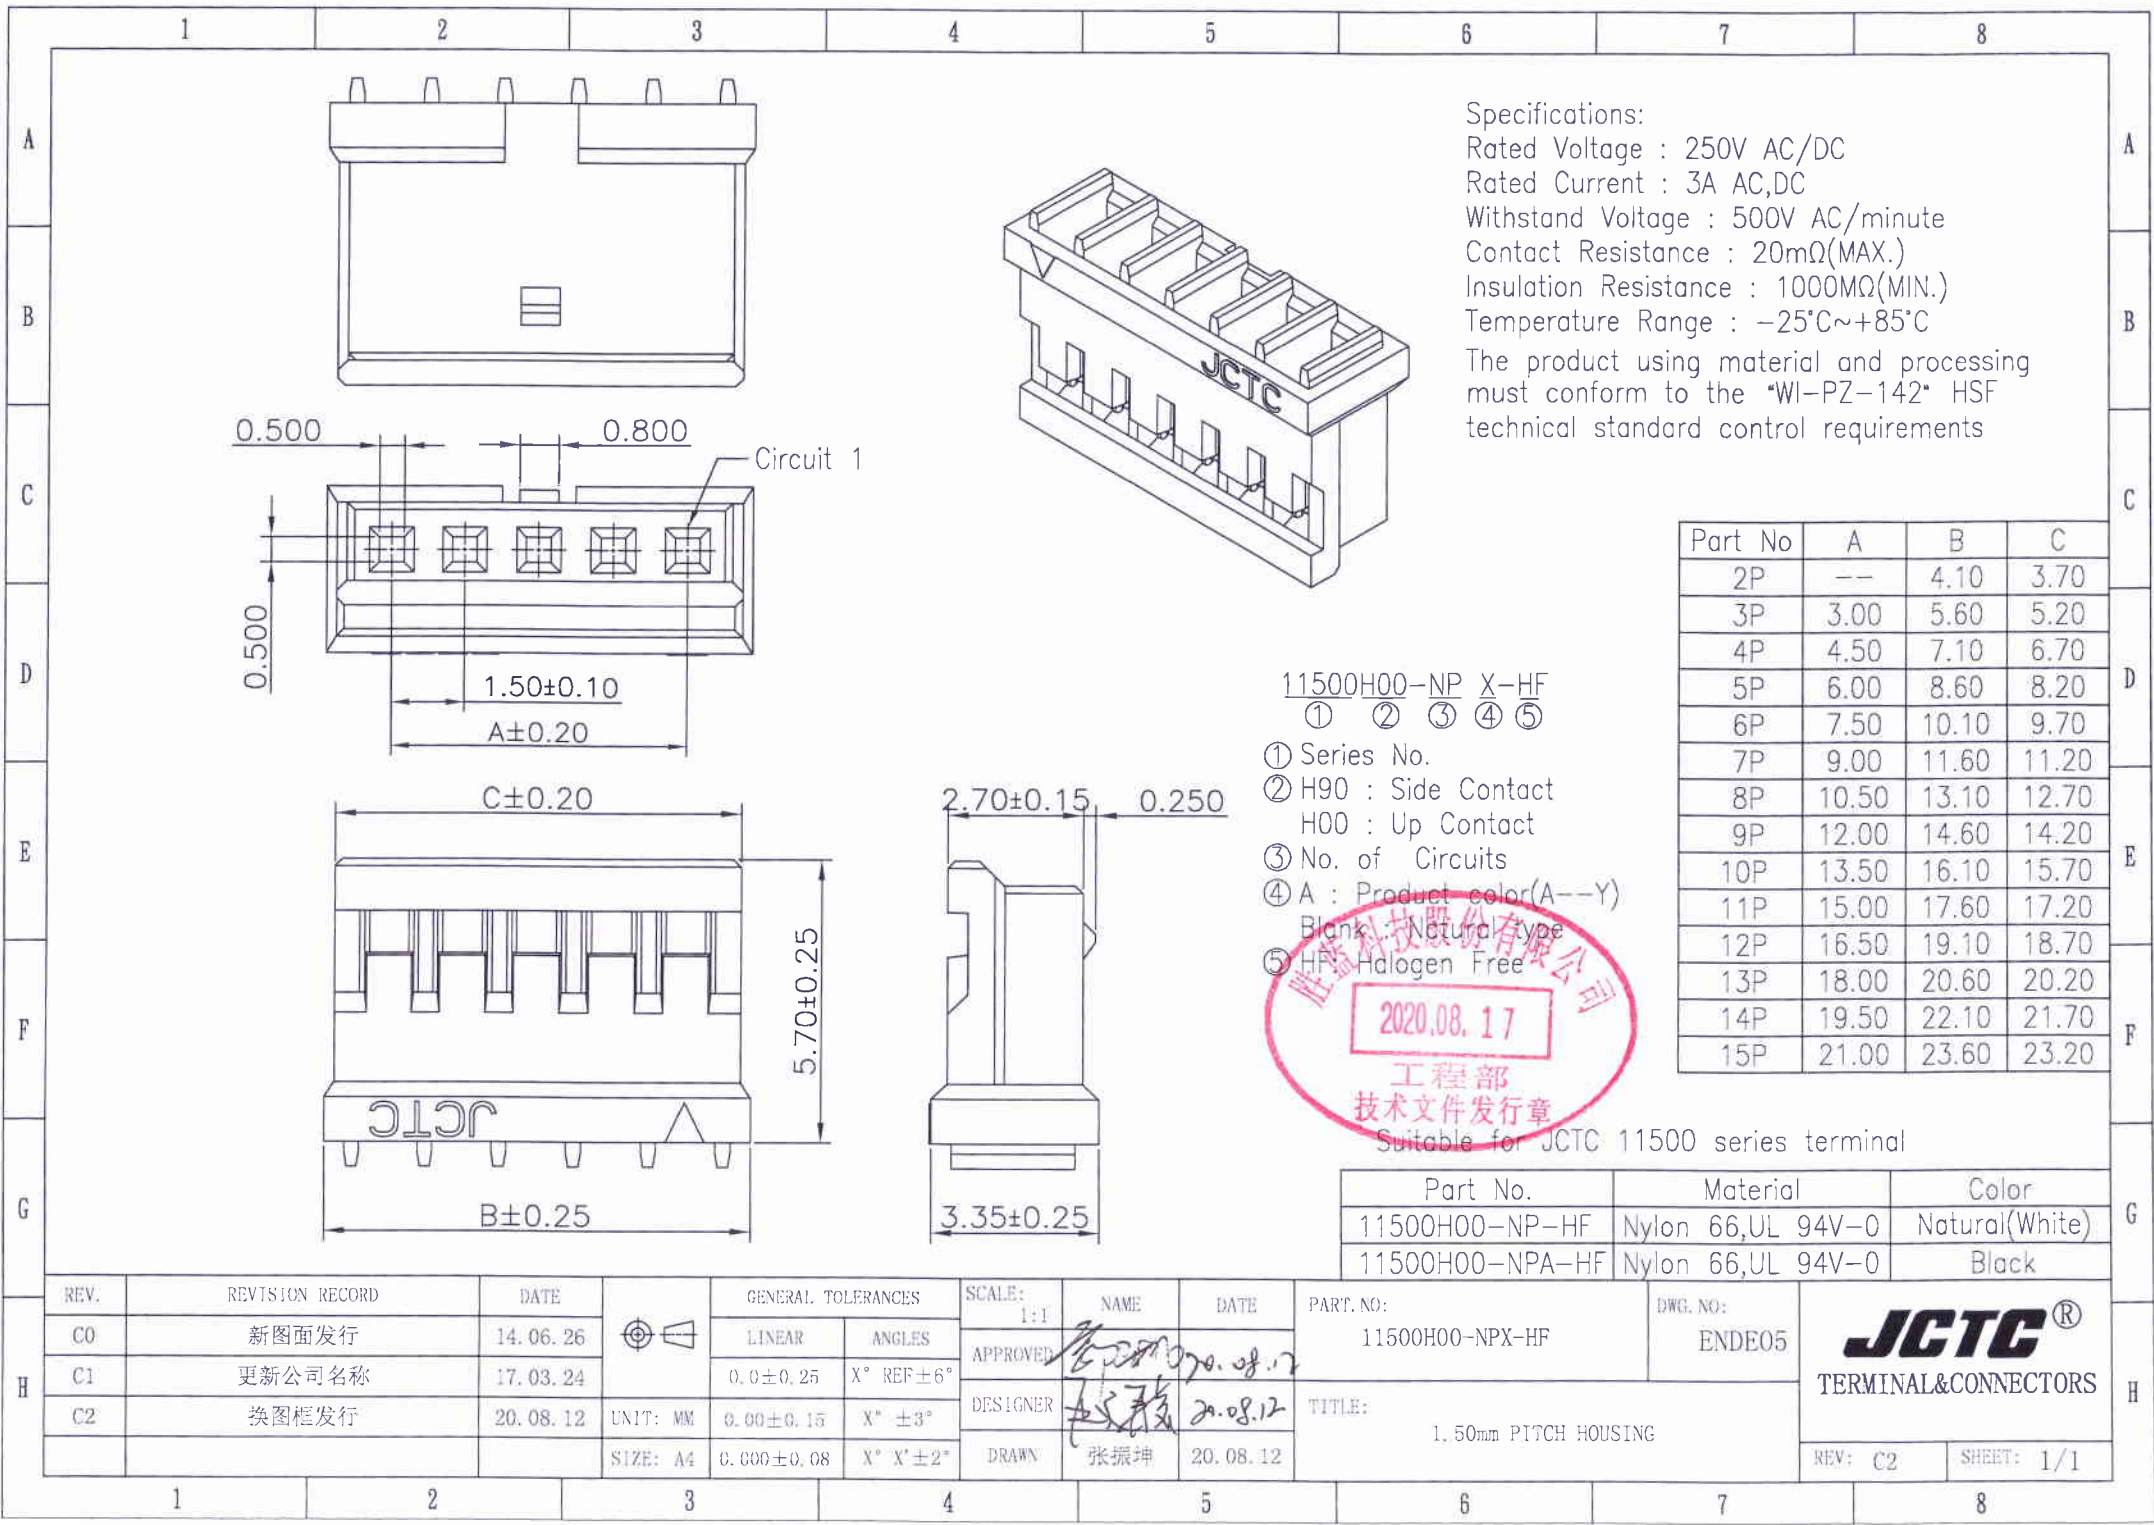

Specifications:
Rated Voltage : 250V AC/DC
Rated Current : 3A AC,DC
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -25°C~+85°C
The product using material and processing must conform to the "WI-PZ-142" HSF technical standard control requirements

Part No	A	B	C
2P	--	4.10	3.70
3P	3.00	5.60	5.20
4P	4.50	7.10	6.70
5P	6.00	8.60	8.20
6P	7.50	10.10	9.70
7P	9.00	11.60	11.20
8P	10.50	13.10	12.70
9P	12.00	14.60	14.20
10P	13.50	16.10	15.70
11P	15.00	17.60	17.20
12P	16.50	19.10	18.70
13P	18.00	20.60	20.20
14P	19.50	22.10	21.70
15P	21.00	23.60	23.20

11500H00-NP X-HF

① ② ③ ④ ⑤

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ A : Product color(A--Y)
Blank : Natural type
- ⑤ HF: Halogen Free

2020.08.17
工程部
技术文件发行章
Suitable for JCTC 11500 series terminal

Part No.	Material	Color
11500H00-NP-HF	Nylon 66,UL 94V-0	Natural(White)
11500H00-NPA-HF	Nylon 66,UL 94V-0	Black

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO:	DWG. NO:	JCTC® TERMINAL&CONNECTORS
C0	新图面发行	14.06.26	LINEAR	1:1	APPROVED	20.08.12	11500H00-NPX-HF	ENDE05	
C1	更新公司名称	17.03.24	ANGLES		DESIGNER	20.08.12	TITLE:		
C2	换图框发行	20.08.12	UNIT: MM		DRAWN	张振坤	1.50mm PITCH HOUSING		
			SIZE: A4			20.08.12			
			0.00±0.15						REV: C2
			0.00±0.08						SHEET: 1/1

1 2 3 4 5 6 7 8

A

B

C






D

E

F

G

H

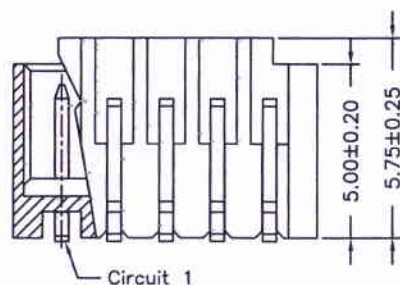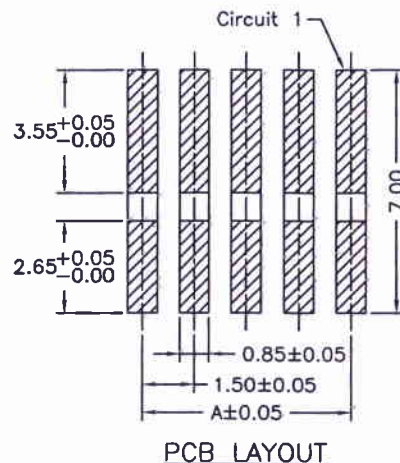

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 350V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin-plated
Material: LCP,UL94V-0
Color: Natural(Beige)

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
11500W00-2P-S	1.50	4.30
11500W00-3P-S	3.00	5.80
11500W00-4P-S	4.50	7.30
11500W00-5P-S	6.00	8.80
11500W00-6P-S	7.50	10.30
11500W00-7P-S	9.00	11.80
11500W00-8P-S	10.50	13.30
11500W00-9P-S	12.00	14.80
11500W00-10P-S	13.50	16.30
11500W00-11P-S	15.00	17.80
11500W00-12P-S	16.50	19.30
11500W00-13P-S	18.00	20.80
11500W00-14P-S	19.50	22.30
11500W00-15P-S	21.00	23.80

11500W00-NP-S

① ② ③ ④

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ S : SMT TYPE

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE:	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART NO:	
A0	NEW REV	19.07.18		LINEAR	ANGLES	1:1	APPROVED			11500W00-NP-S	
				0.0±0.25	X° REF±6°		DESIGNER	19.07.18		DWG. NO:	
				0.00±0.15	X° ±3°		DRAWN	19.07.18		ENDE05	
				0.000±0.08	X° X'±2°					REV: A0	SHEET: 1/1

1 2 3 4 5 6 7 8