

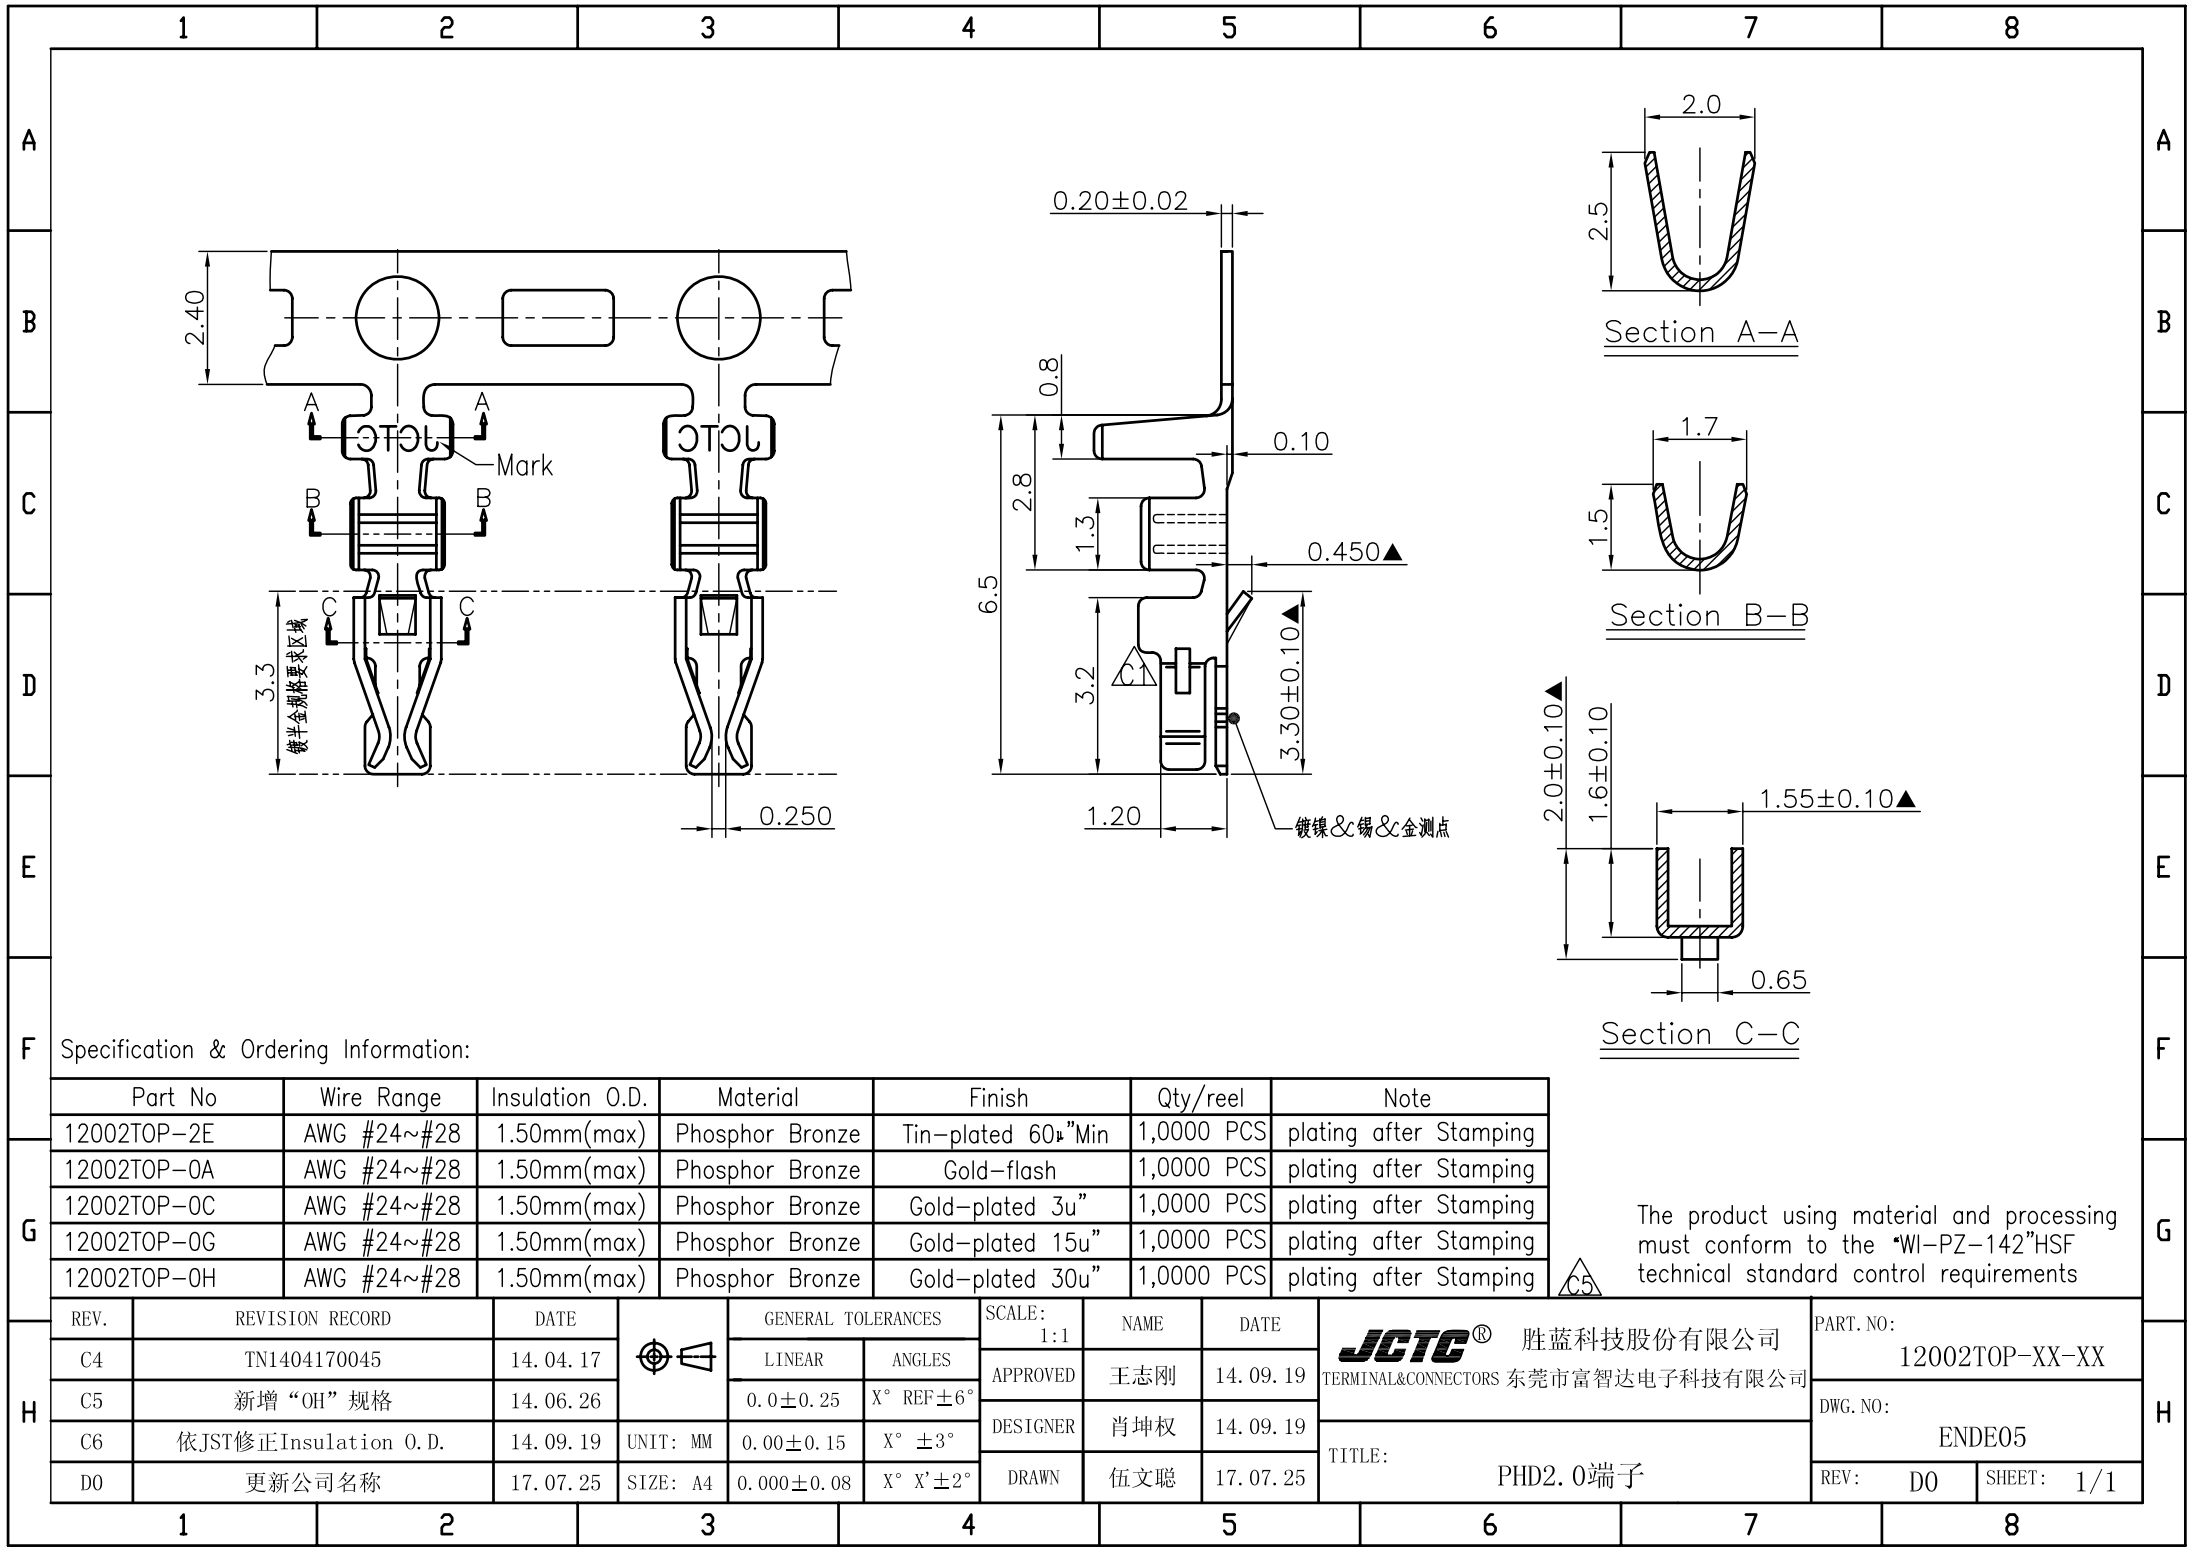
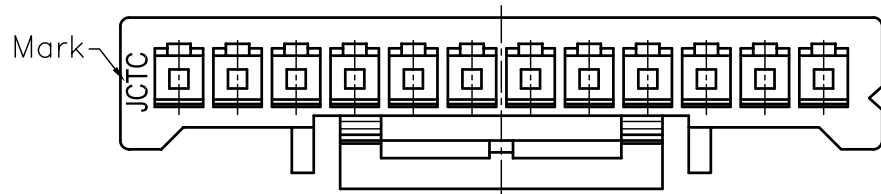

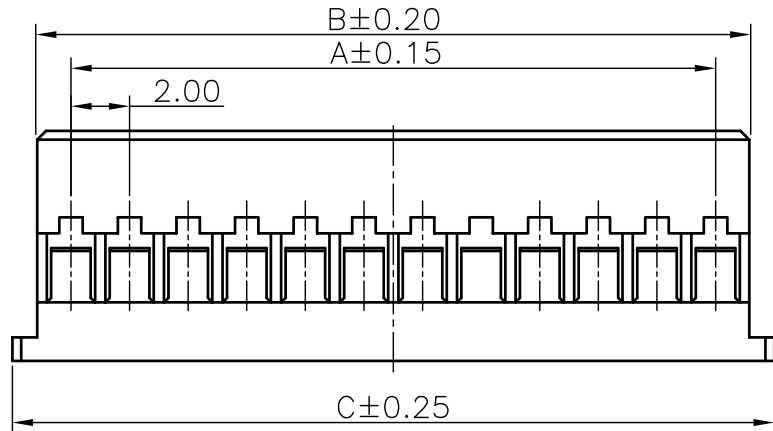






环保物料

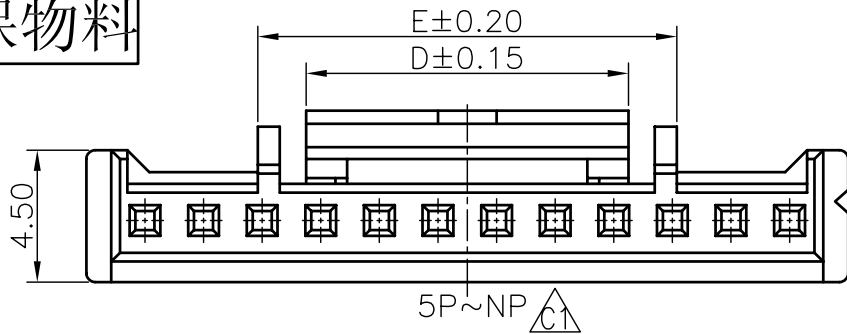

Specifications:
Rated Voltage : 250V AC/DC
Rated Current : 3A AC,DC
Withstand Voltage : 800V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -25°C~+85°C

12002H00-NP-L-HF
① ② ③ ④ ⑤










- ① Series No.
② H90 : Side Contact
H00 : Up Contact
③ No. of Circuits
④ L : Mount type
⑤ HF : Halogen Free

Dimensional Ordering Information:					
Circuits No.	Dimensions				
	A	B	C	D	E
2P	--	4.30	6.00	2.00	
3P	4.00	6.30	8.00	3.30	
4P	6.00	8.30	10.00	4.50	
5P	8.00	10.30	12.00	4.50	7.80
6P	10.00	12.30	14.00	4.50	7.80
7P	12.00	14.30	16.00	4.50	7.80
8P	14.00	16.30	18.00	4.50	7.80
9P	16.00	18.30	20.00	4.50	7.80
10P	18.00	20.30	22.00	11.00	14.30
11P	20.00	22.30	24.00	11.00	14.30
12P	22.00	24.30	26.00	11.00	14.30
13P	24.00	26.30	28.00	11.00	14.30
14P	26.00	28.30	30.00	11.00	14.30
15P	28.00	30.30	32.00	11.00	14.30
16P	30.00	32.30	34.00	11.00	14.30

Suitable for JCTC 12002 series terminal

Part No.	Material	Color
12002H00-NP-L-HF	Nylon 66,UL94V-0	Natural(White)

C6	11.05.21	HN1105210079	龚友连	王志刚	一般公差 GENERAL TOLERANCE X.X ±0.25 X' ±5' X.XX ±0.15 X.X' ±2' X.XXX ±0.08 ▲ MAJOR DIM.		绘图 DR.	陈 干	JCTC® 东莞市胜蓝电子有限公司 富 强 电 子 厂		料号 PART NO. 12002H00-NP-L-HF	
C5	11.04.06	HN1104060055	龚友连	王志刚			校对 CHK.	欧阳小强			文件编号 NUMBER	
C4	11.03.07	HN1103070036	龚友连	王志刚			审核 CHK.	龚友连			ENDE05	
C3	11.02.14	HN1102140024	龚友连	王志刚			核准 APPD.	王志刚			比例 SCALE	
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm			PA 单排带扣 2.0mm PITCH HOUSING		SHEET	版次 REV.
											1/1	C6

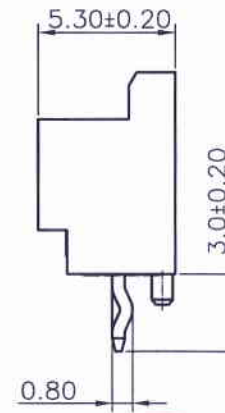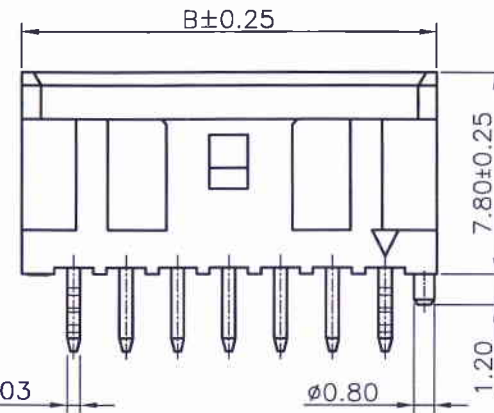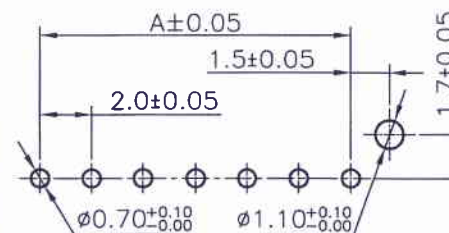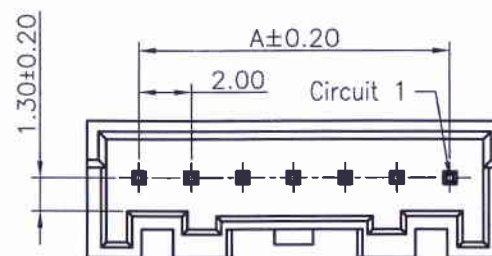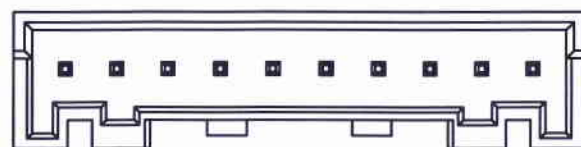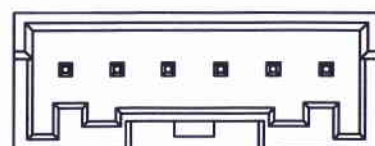


PART NO.	Dimensions	
	A	B
2P	--	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00

① ② ③ ④ ⑤ ⑥


- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ L : With Lock
- ⑤ F : With Boss
- ⑥ HF : Halogen Free

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing
 must conform to the "WI-PZ-142"HSF
 technical standard control requirements

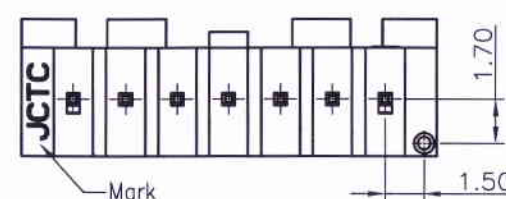


Part No.	Insulator	Color	Contact
12002W00-NP-L-F-HF	Nylon 66+15%GF,UL94V-0	Natural(White)	Brass/Tin-plated

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO: 12002W00-NP-L-F-HF
C0	新图面发行	14.10.28		LINEAR	ANGLES	APPROVED				
C1	更新公司名称	17.05.27		0.0±0.25	X° REF±6°	DESIGNER				
				UNIT: MM	0.00±0.15	X° ±3°				
				SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	伍文聪		17.05.27
TITLE: PA 2.00mm PITCH DIP TYPE WAFER									DWG. NO: ENDE05	
									REV: C1	SHEET: 1/1

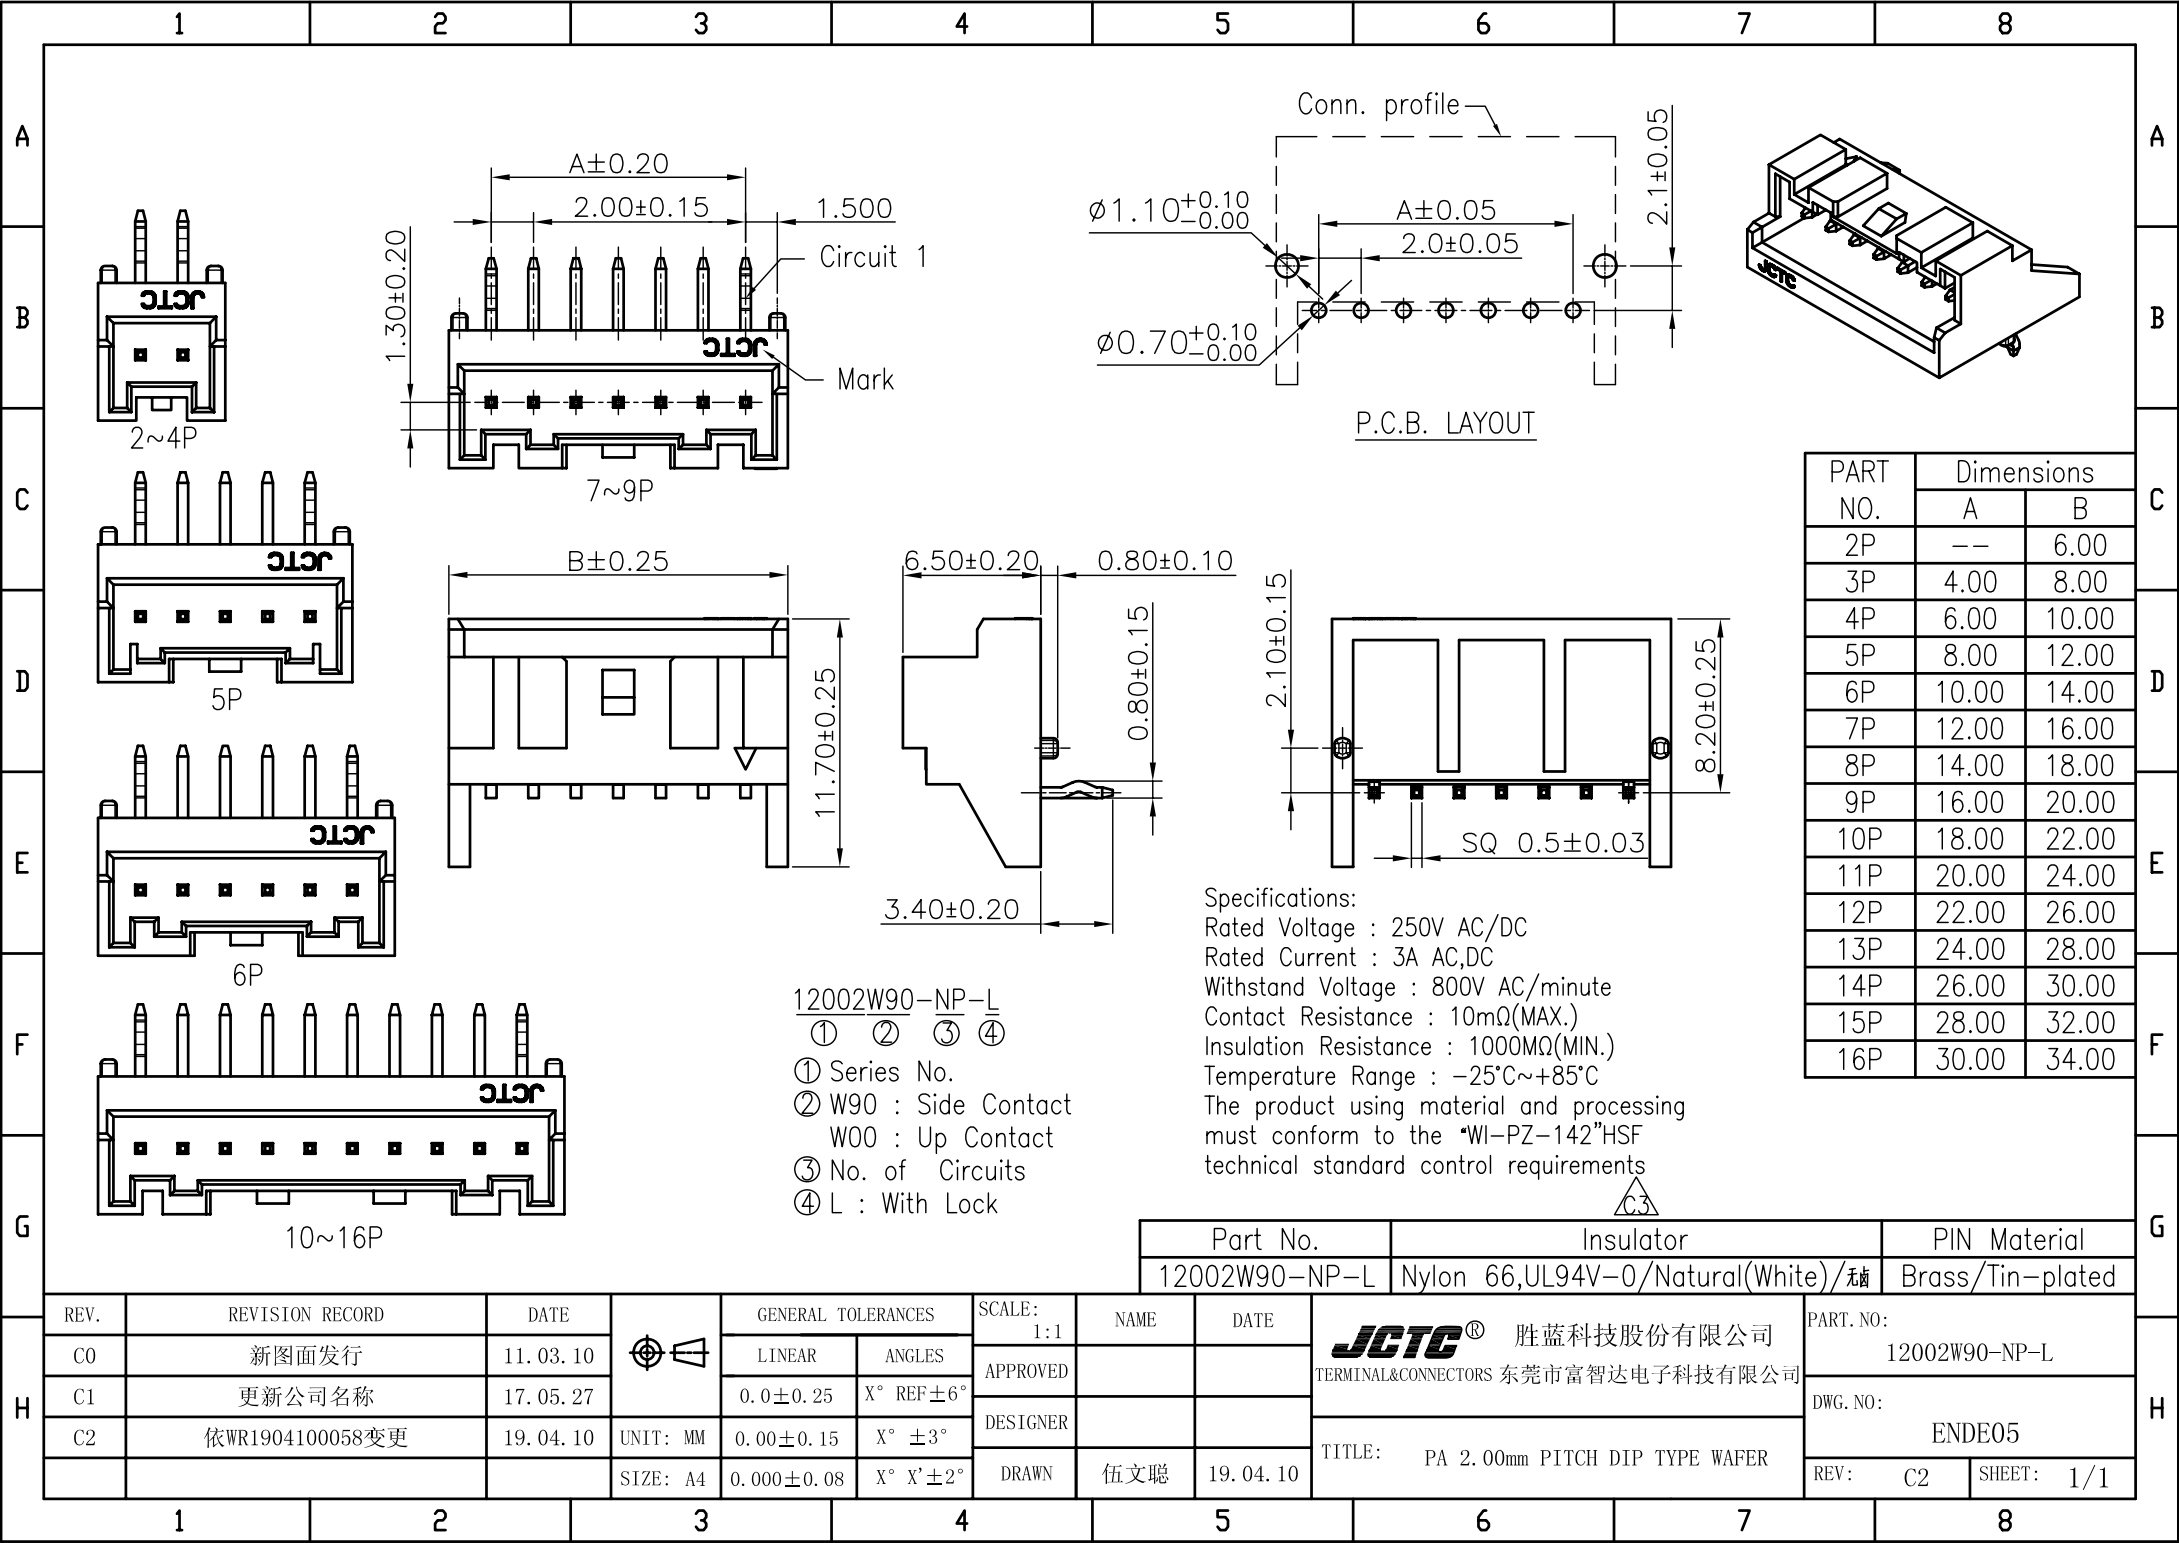


PART NO.	Dimensions	
	A	B
2P	--	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO: 12002W90-NP-L	
C0	新图面发行	11. 03. 10		LINEAR	ANGLES	APPROVED				DWG. NO: ENDE05	
C1	更新公司名称	17. 05. 27		0. 0±0. 25	X° REF±6°						
C2	依WR1904100058变更	19. 04. 10		UNIT: MM	0. 00±0. 15						X° ±3°
				SIZE: A4	0. 000±0. 08	X° X'±2°	DRAWN	伍文聪			19. 04. 10

Part No.	Insulator	PIN Material
12002W90-NP-L	Nylon 66,UL94V-0/Natural(White)/无卤	Brass/Tin-plated

JCTC® 胜蓝科技股份有限公司		PART. NO:	
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司		12002W90-NP-L	
		DWG. NO:	
		ENDE05	
TITLE: PA 2.00mm PITCH DIP TYPE WAFER		REV: C2	
		SHEET: 1/1	

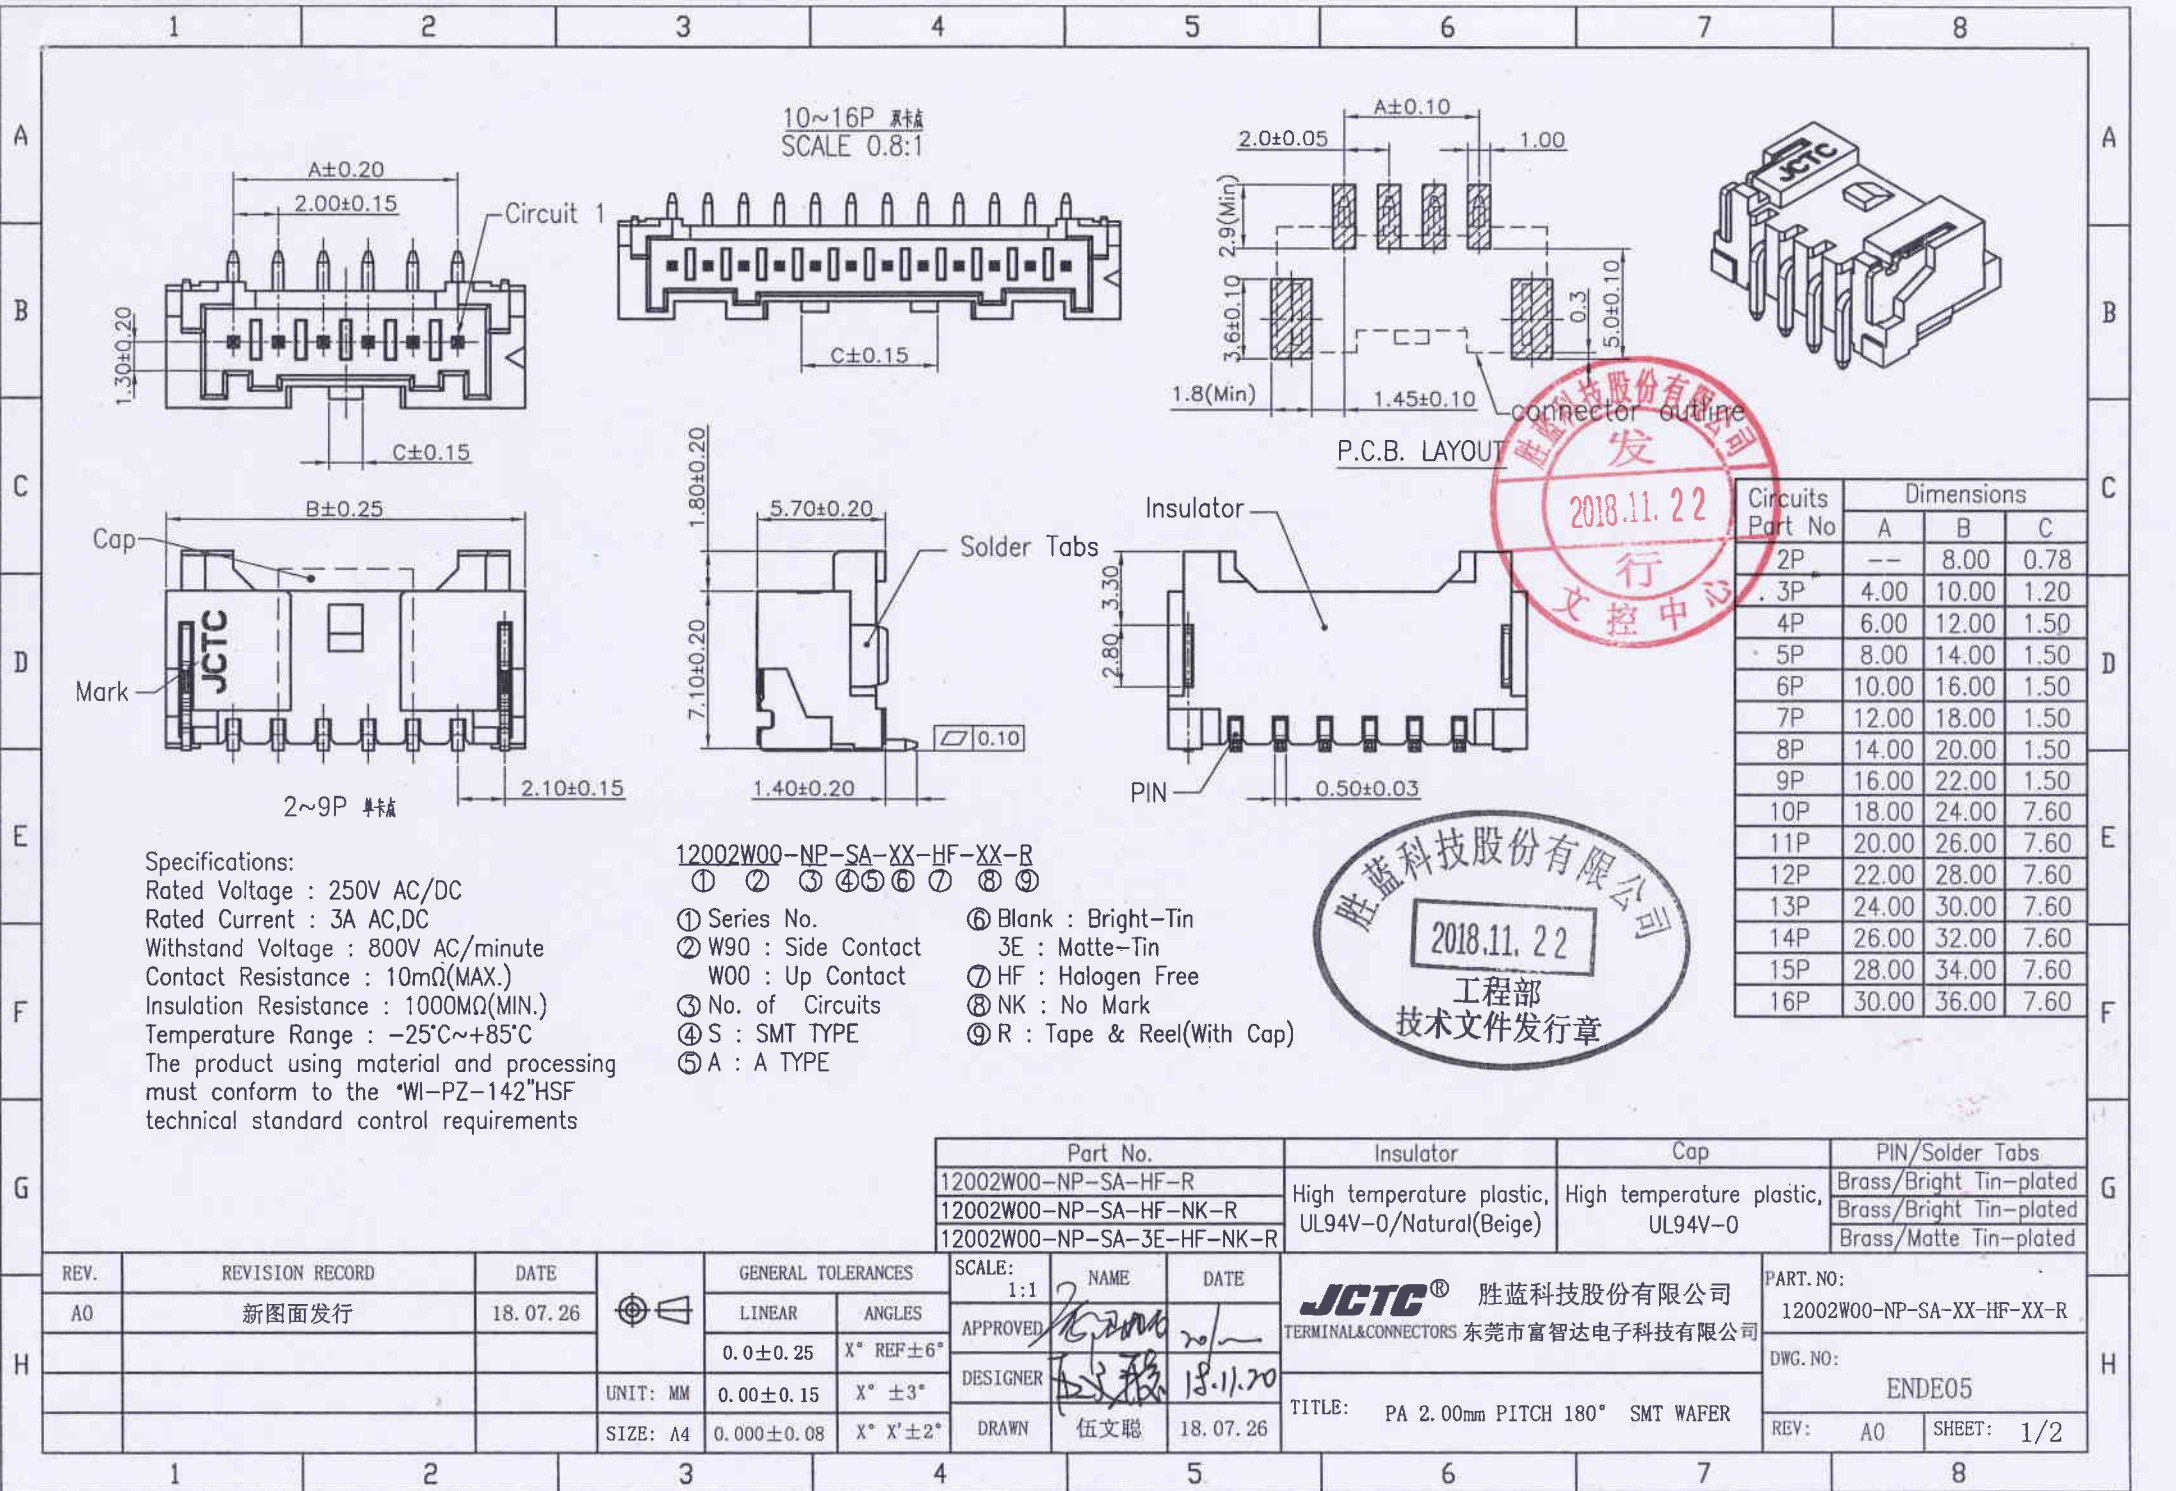

Specifications:
Rated Voltage : 250V AC/DC
Rated Current : 3A AC,DC
Withstand Voltage : 800V AC/minute
Contact Resistance : 10mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -25°C~+85°C
The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

- 12002W00-NP-SA-XX-HF-XX-R
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
- ① Series No.
 - ② W90 : Side Contact
 - ③ No. of Circuits
 - ④ S : SMT TYPE
 - ⑤ A : A TYPE
 - ⑥ Blank : Bright-Tin
 - ⑦ HF : Halogen Free
 - ⑧ NK : No Mark
 - ⑨ R : Tape & Reel(With Cap)




Circuits Part No	Dimensions		
	A	B	C
2P	--	8.00	0.78
3P	4.00	10.00	1.20
4P	6.00	12.00	1.50
5P	8.00	14.00	1.50
6P	10.00	16.00	1.50
7P	12.00	18.00	1.50
8P	14.00	20.00	1.50
9P	16.00	22.00	1.50
10P	18.00	24.00	7.60
11P	20.00	26.00	7.60
12P	22.00	28.00	7.60
13P	24.00	30.00	7.60
14P	26.00	32.00	7.60
15P	28.00	34.00	7.60
16P	30.00	36.00	7.60

Part No.	Insulator	Cap	PIN/Solder Tabs
12002W00-NP-SA-HF-R	High temperature plastic, UL94V-0/Natural(Beige)	High temperature plastic, UL94V-0	Brass/Bright Tin-plated
12002W00-NP-SA-HF-NK-R			Brass/Bright Tin-plated
12002W00-NP-SA-3E-HF-NK-R			Brass/Matte Tin-plated






REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	JCTC® 胜蓝科技股份有限公司	PART NO:
A0	新图面发行	18.07.26	LINEAR	APPROVED	18.11.20	TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	12002W00-NP-SA-XX-HF-XX-R	
			ANGLES	DESIGNER				DWG. NO:
			0.0±0.25					ENDE05
			0.00±0.15					REV: A0
			0.00±0.08					SHEET: 1/2
			X° REF±6°					
			X° ±3°					
			X° X'±2°					
			UNIT: MM					
			SIZE: A4					
				DRAWN	伍文聪	18.07.26		

2~5 Contacts

6~16 Contacts

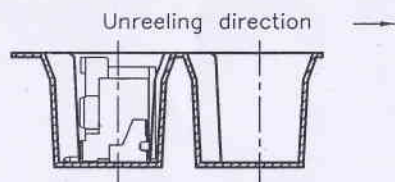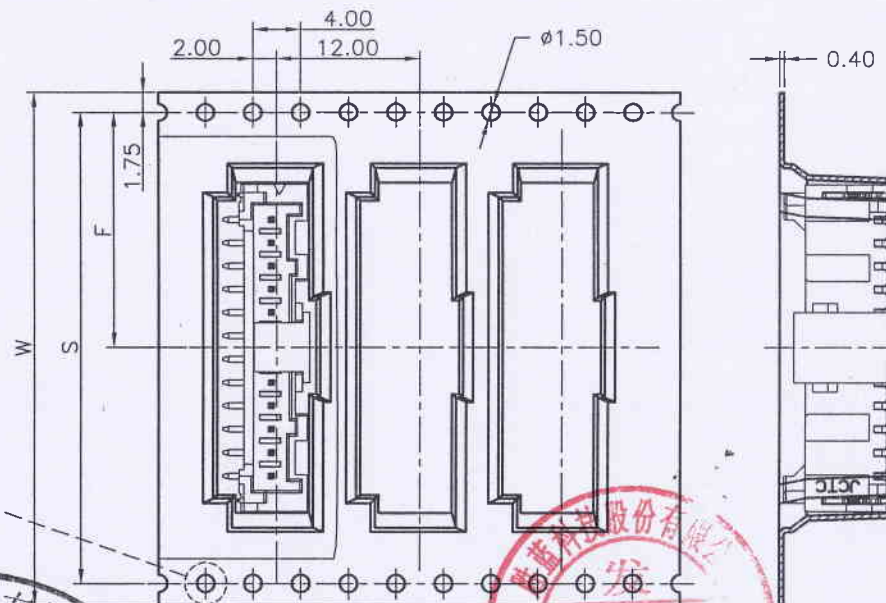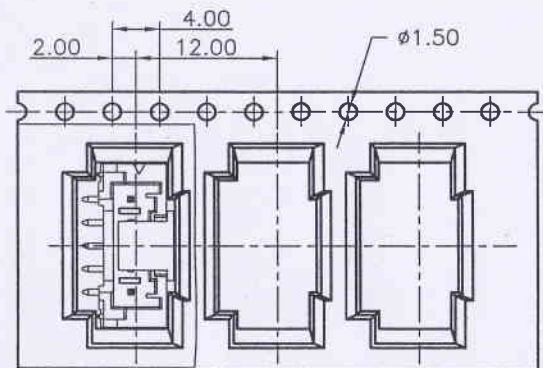


Unreeling direction

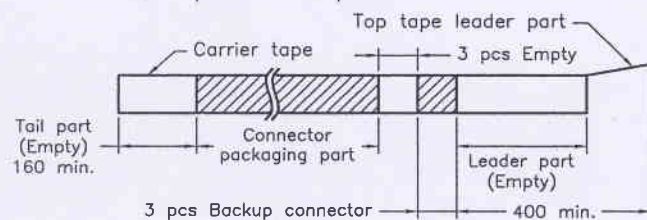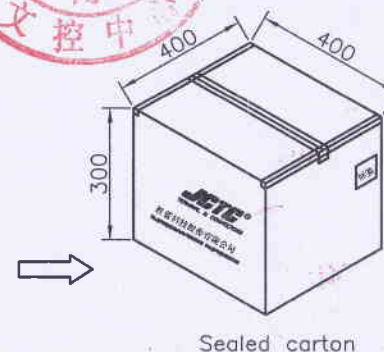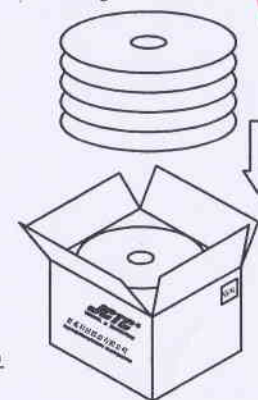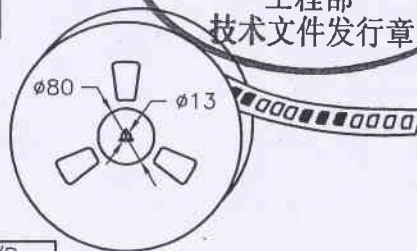R0.85
1.50^{+0.10}_{-0.00}

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel	Q'ty/Box
2~5P	24	11.50		750pcs	7500pcs
6~8P	32	14.20	28.40	750pcs	6000pcs
9~13P	44	20.20	40.40	750pcs	4500pcs
14~15P	56	26.20	52.40	750pcs	3750pcs





REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO:
A0	新图面发行	18.07.26		LINEAR	ANGLES	APPROVED				12002W00-NP-SA-XX-HF-XX-R
				0.0±0.25	X° REF±6°	DESIGNER		18-11-20		DWG. NO:
			UNIT: MM	0.00±0.15	X° ±3°				ENDE05	
			SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	伍文聪	18.07.26	TITLE: PA 2.00mm PITCH 180° SMT WAFER	
									REV: A0 SHEET: 2/2	

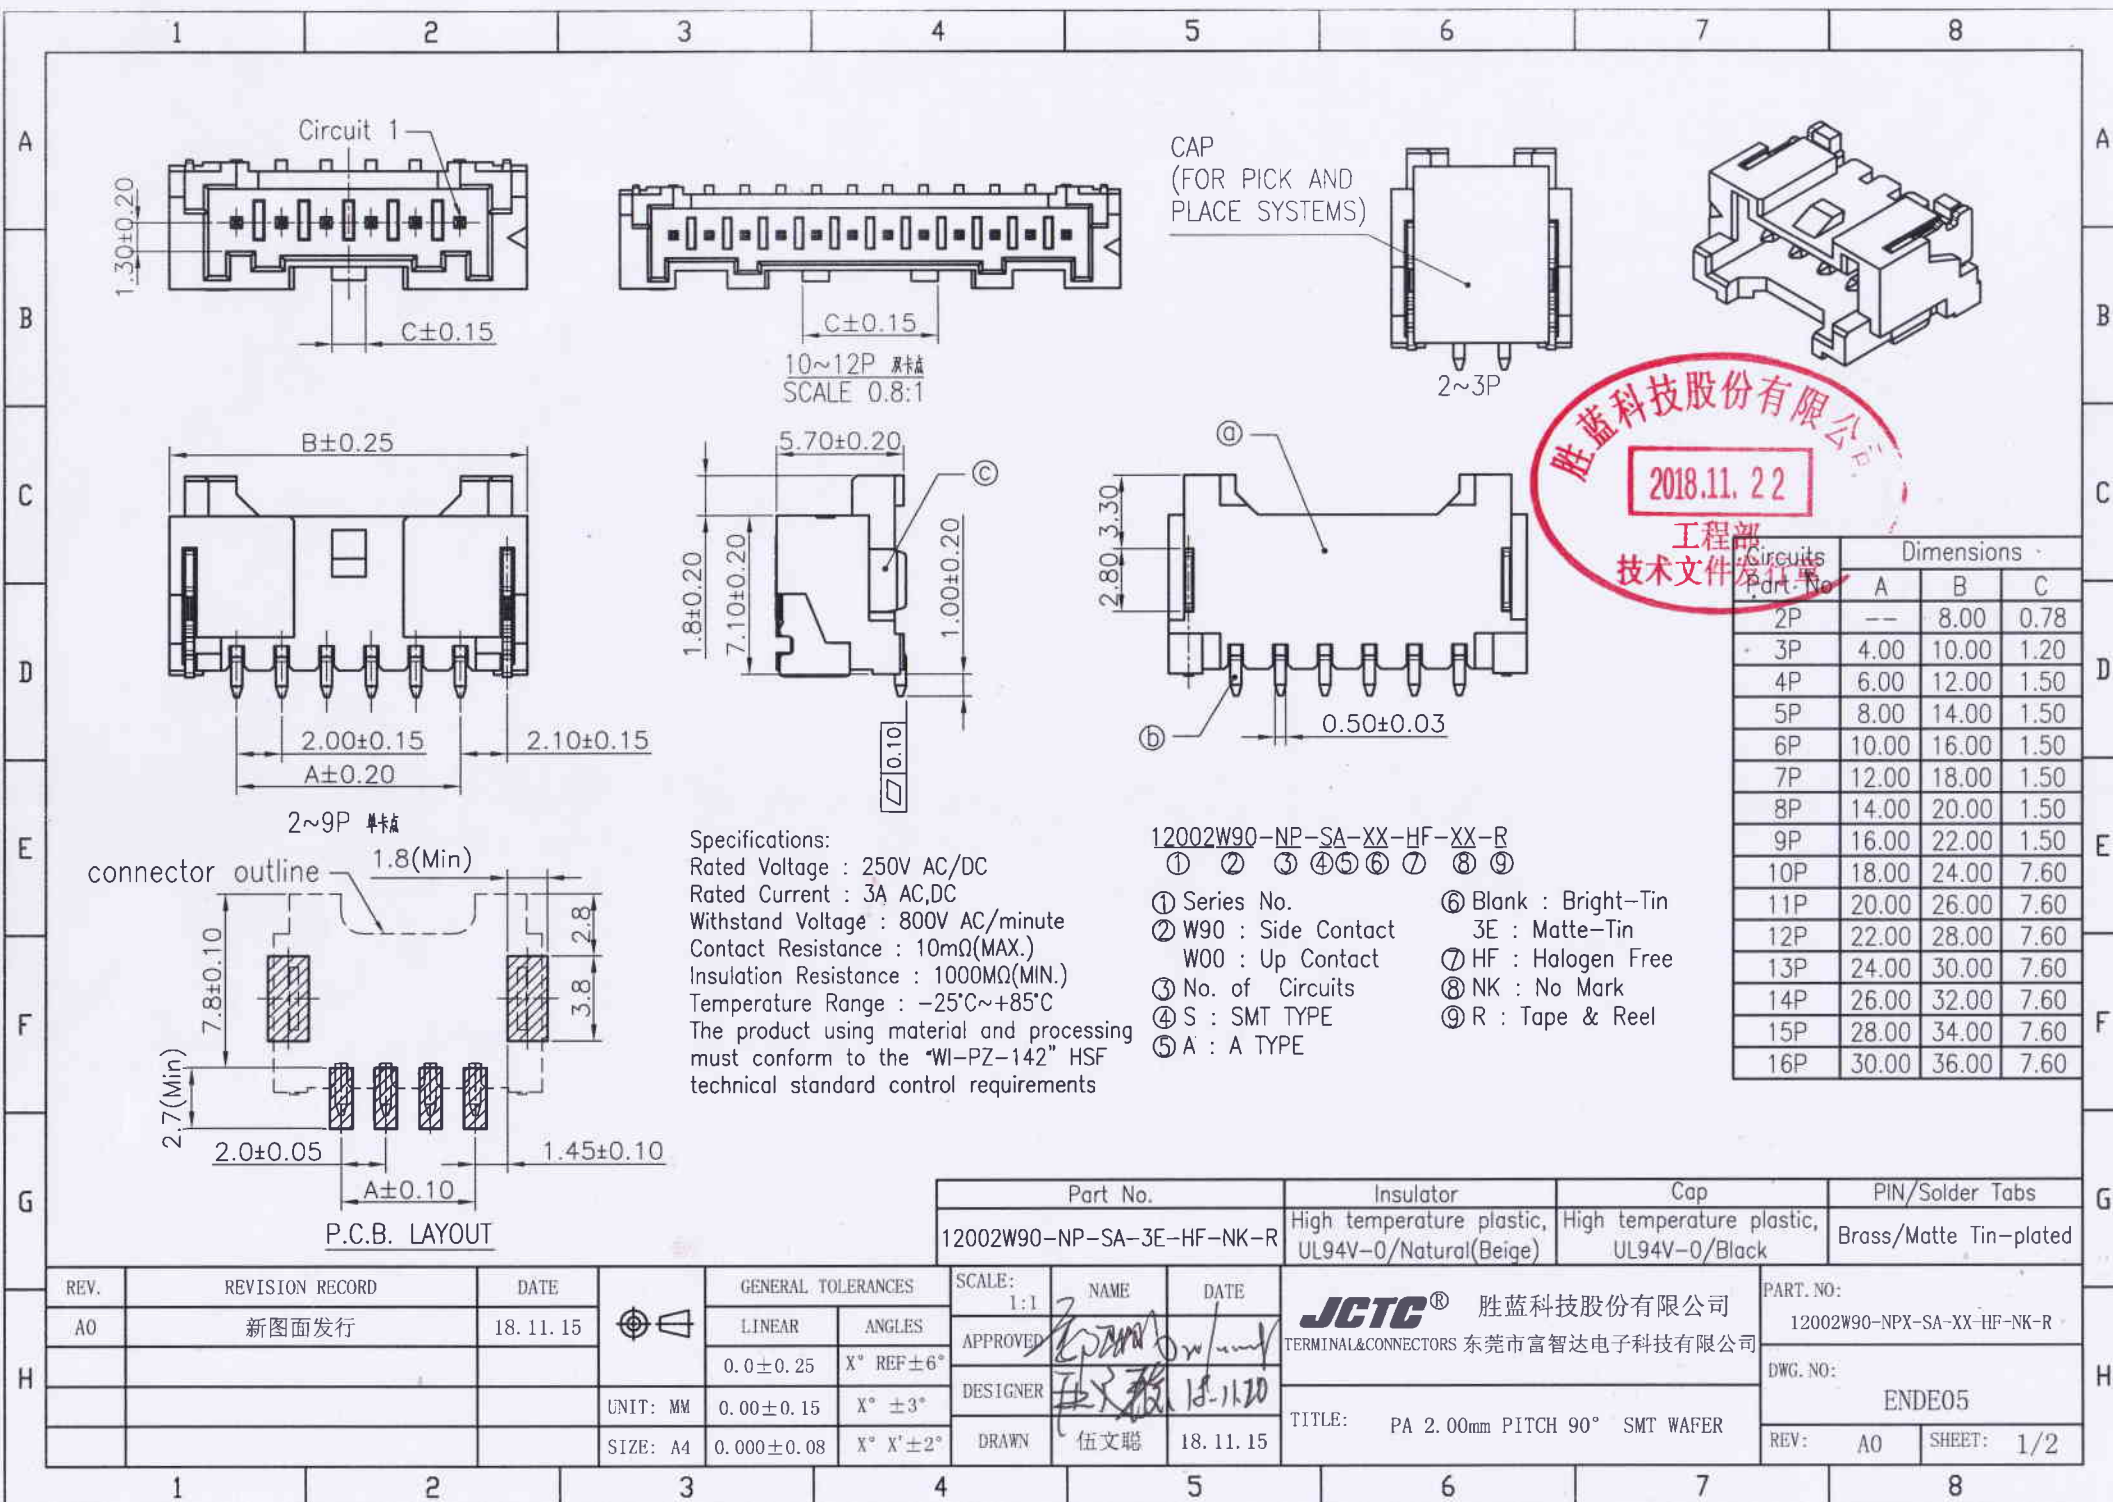








2~5 Contacts

6~12 Contacts

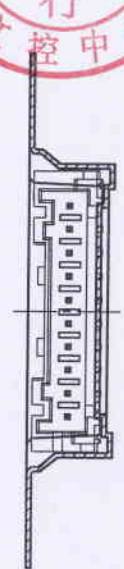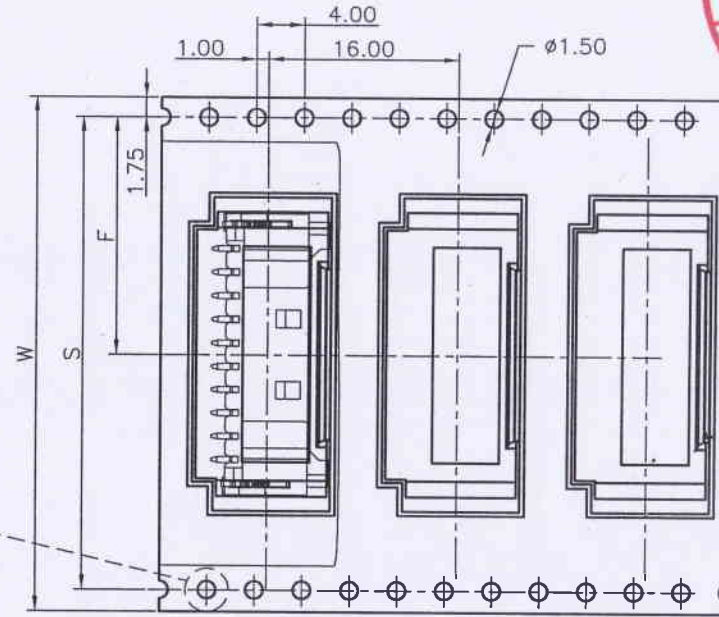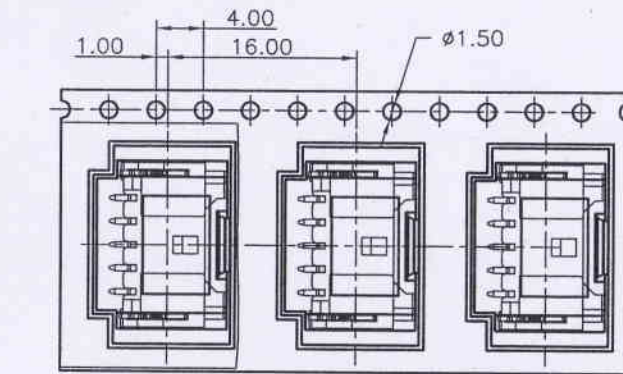

Unreeling direction →

Unreeling direction →

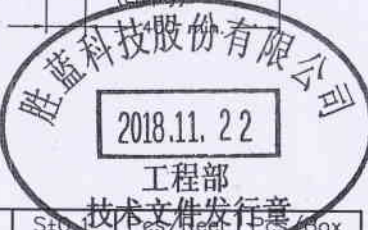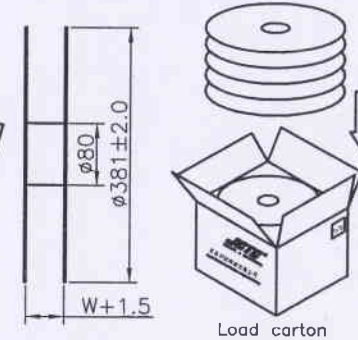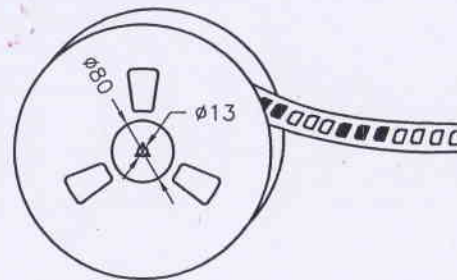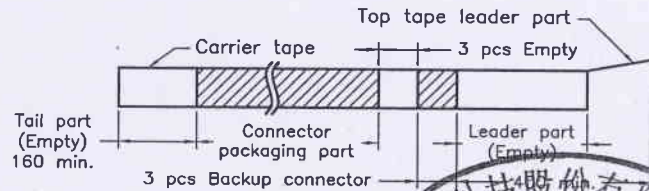

Number of Contacts	W±0.3	F±0.1	Storage (Pcs/Reel)	Pcs/Box	
2~5P	24	11.50	800	8000	
6P, 7P	32	14.20	28.40	800	6400
8~12P	44	20.20	40.40	800	4800

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART. NO:
A0	新图面发行	18.11.15	LINEAR	1:1	伍文聪	18.11.15	12002W90-NPX-SA-XX-HF-NK-R
			ANGLES	APPROVED	伍文聪	18.11.15	DWG. NO:
			0.0±0.25	DESIGNER	伍文聪	18.11.15	ENDE05
			0.00±0.15	DRAWN	伍文聪	18.11.15	REV: A0
			0.000±0.08				SHEET: 2/2