




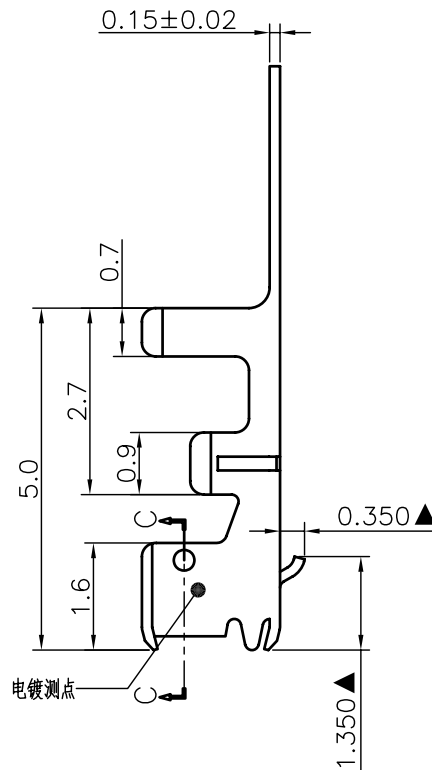
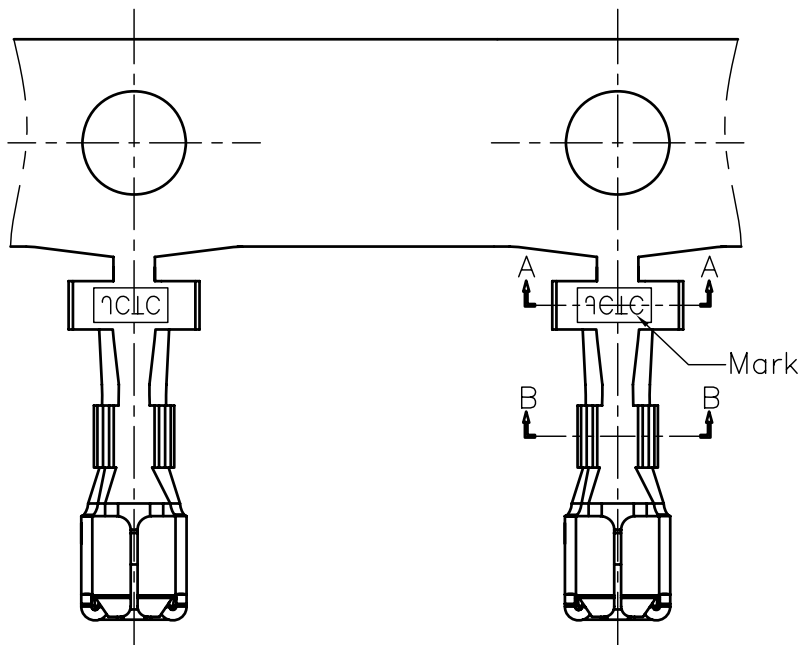



环保物料

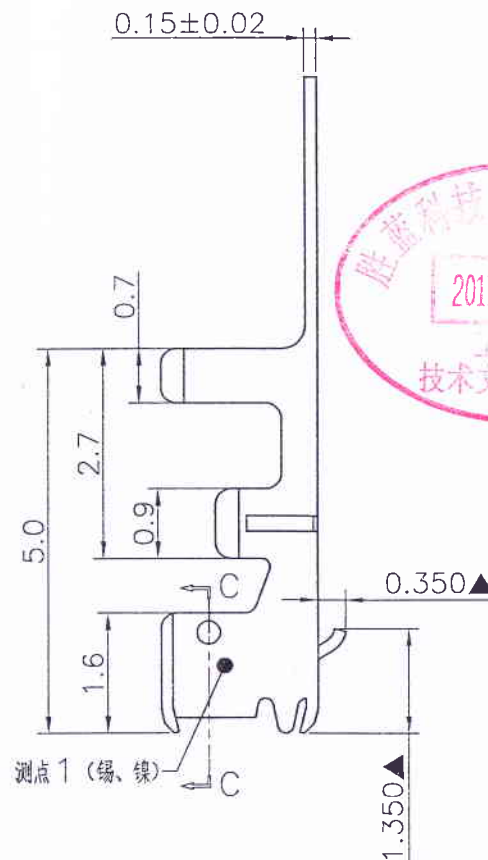


Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
12006TOP-2	AWG#24~#30	1.40mm(max)	Phosphor bronze	Tin-plated	10,000PCS


					一般公差 GENERAL TOLERANCE		绘图 DR.	EAST	JCTC 东莞市胜蓝电子有限公司 —— 富强电子厂 ——	料号 PART NO. 12006TOP-2		
					X.X ±0.25	X' ±5'	校对 CHK.	唐海江		文件编号 NUMBER		
					X.XX ±0.15	X.X' ±2'	审核 CHK.	龚友连		ENDE05		
					X.XXX ±0.08	▲ MAJOR DIM.	核准 APPD.	王志刚		比例 SCALE		
C1	10.10.11	图面与实物不符, 修正图面	龚友连	唐海江	单位 UNIT			品名 TITLE		MOLEX2.0端子		
CO	10.01.19	换图框发行	EAST	唐海江	mm					1/1	SHEET 1/1	版次 REV. C1
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.								

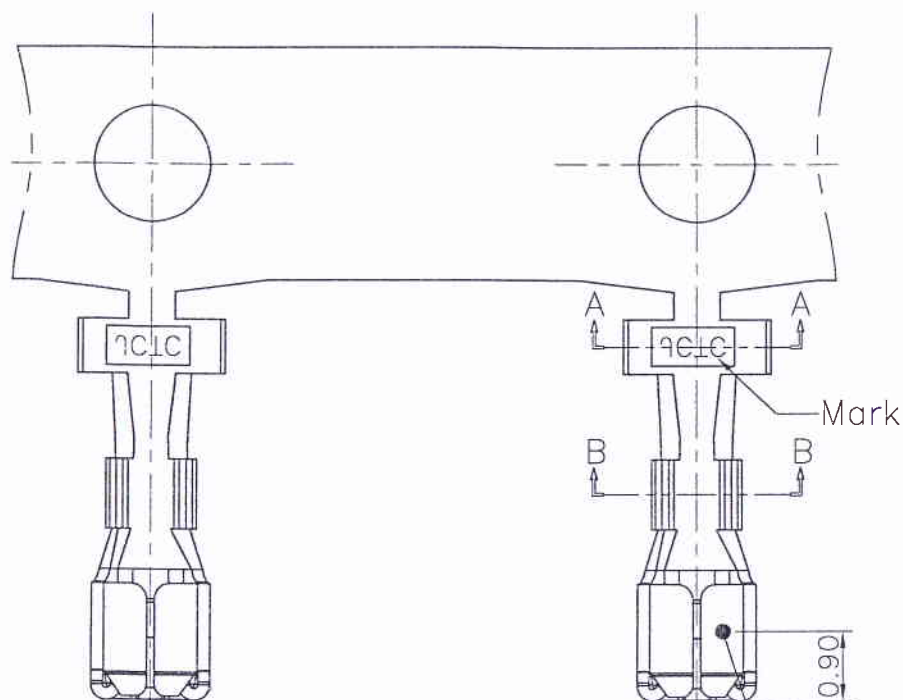

SECTION:A-A



SECTION:B-B



SECTION:C-C

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

12006TOP-XX

Finish

- 0A: Gold flash on contact Area
- 0B: 2u"Au on contact Area
- 0C: 3u"Au on contact Area
- 0E: 5u"Au on contact Area
- 0G: 15u"Au on contact Area

Part No	Wire Range	Insulation O.D	Material	Finish	Qty/reel
12006TOP-2	AWG#24~#30	1.40mm(max)	Phosphor bronze	Tin-plated(先镀后冲)	10,000PCS
12006TOP-2E	AWG#24~#30	1.40mm(max)	Phosphor bronze	Tin-plated(先冲后镀)	10,000PCS
12006TOP-0X	AWG#24~#30	1.40mm(max)	Phosphor bronze	Au on contact Area	10,000PCS

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE
C2	增加电镀规格	15.07.27	LINEAR	1:1	APPROVED	
C3	增加镀半金规格	16.03.07	0.0±0.25		DESIGNER	
C4	TR1607050096	16.03.07	0.00±0.15		DRAWN	
C5	更换公司名称	17.10.17	0.000±0.08			

JCTC 胜蓝科技股份有限公司	PART. NO:
TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	12006TOP-XX
TITLE: 1.0mm PITCH 双排 Housing	DWG. NO:
	ENDE05
	REV: C5 SHEET: 1/1

Specifications:

Rated Voltage : 125V AC/DC

Rated Current : 2A AC,DC

Withstand Voltage : 500V AC/minute



Contact Resistance : 20mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -25℃~+85℃

Pitch Between Poles : 2.00mm

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

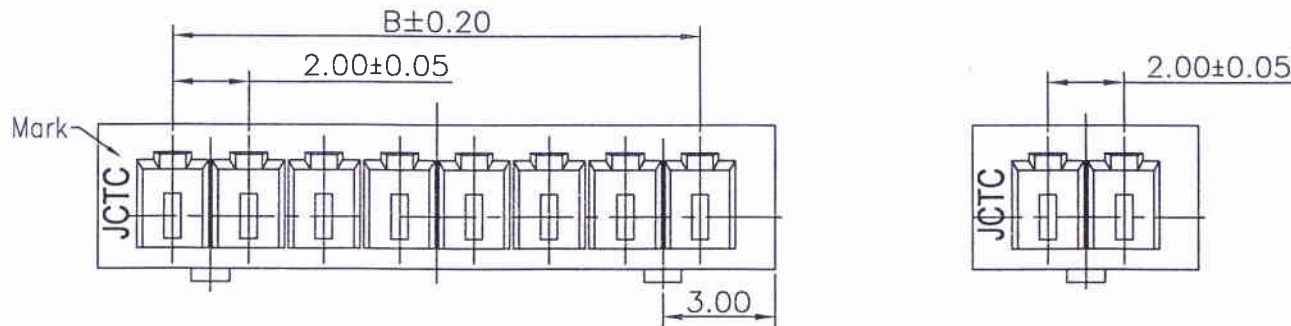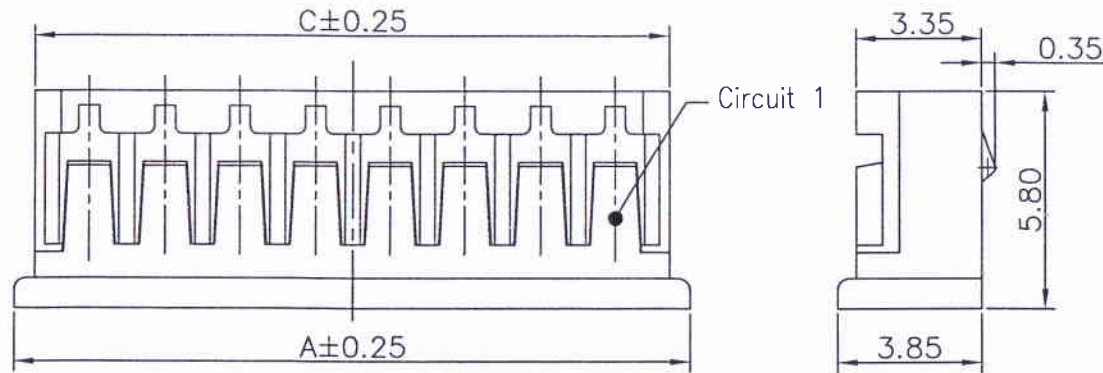

12006H00-NPX-HF

① ② ③④ ⑤

- ① Series No.
② H00 : Up Contact
③ No. of Circuits
④ X : Product color(A--Y)
⑤ HF : Halogen Free



Circuits No.	Dimensions		
	A	B	C
2P	6.00	4.90	4.90
3P	8.00	4.00	6.90
4P	10.00	6.00	8.90
5P	12.00	8.00	10.90
6P	14.00	10.00	12.90
7P	16.00	12.00	14.90
8P	18.00	14.00	16.90
9P	20.00	16.00	18.90
10P	22.00	18.00	20.90
11P	24.00	20.00	22.90
12P	26.00	22.00	24.90
13P	28.00	24.00	26.90
14P	30.00	26.00	28.90
15P	32.00	28.00	30.90

Suitable for JCTC 12006 series terminal

Part No.	Material	Color
12006H00-NP-HF	Nylon 66,UL94V-0	本色无卤
12006H00-NPA-HF	Nylon 66,UL94V-0	黑色无卤

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO: 12006H00-NP-XX
C1	HN1105280083	11.05.28	LINEAR	ANGLES	APPROVED			
C2	HN1110080136	11.05.28	0.0±0.25	X° REF±6°	DESIGNER		TITLE: MOLEX 2.00mm PITCH HOUSING	DWG. NO: ENDE05
C3	增加黑色规格	15.12.16	UNIT: MM	0.00±0.15	X° ±3°			
C4	更换公司名称	17.10.17	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	伍文聪	17.10.17
							REV: C4	SHEET: 1/1