

Specifications


Current rating: 1A AC, DC
Voltage rating: 50V AC, DC
Temperature range: -25° C ~ +85° C
Contact resistance: 20mΩ Max.
Insulation resistance: 100MΩ Min.
Withstanding voltage: 500V AC/minute
Contact JCTC for details

Standards



E338796

Assembly layout

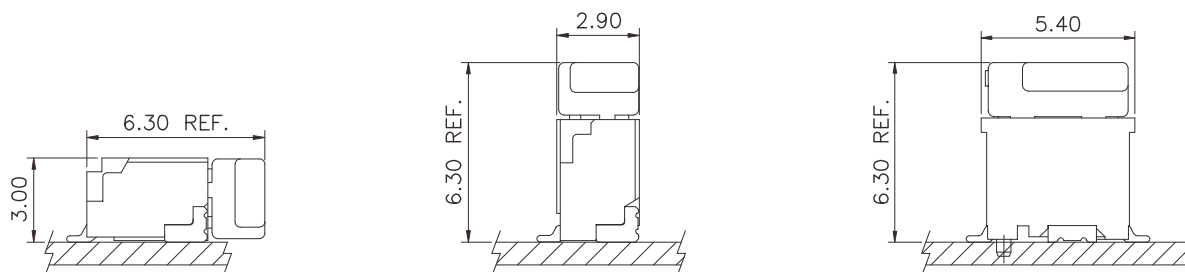


11002TOP-**

1.00mm pitch Crimp Terminal

Reference Informations:

*Used in JCTC 11002 series Housing

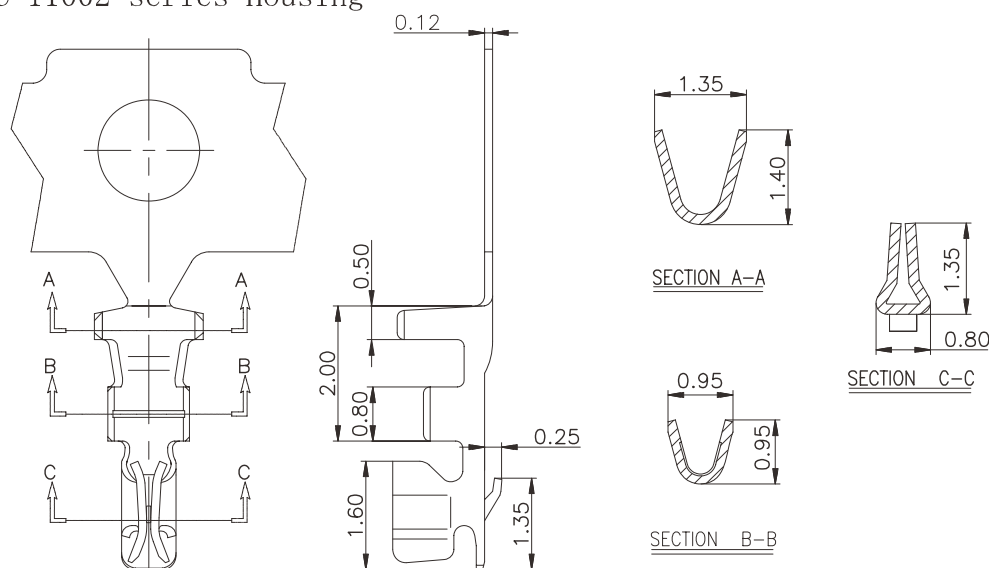

Ordering Information & Specifications

Unit: mm

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
11002TOP-2E	AWG#28-#32	0.80mm(max)	Phosphor Bronze	Tin-plated	20,000pcs
11002TOP-5*	AWG#28-#32	0.80mm(max)	Phosphor Bronze	Gold-flash	20,000pcs

Note:* (o.A...)For contact JCTC

11002H00-NP-**


1.00mm pitch Single Row Housing

Reference Informations:

*Material: PBT, UL94V-0 or Nylon 66, UL94V-0

*Suitable JCTC 11002 series Terminal

*Mates with JCTC 11002 series single row Wafer

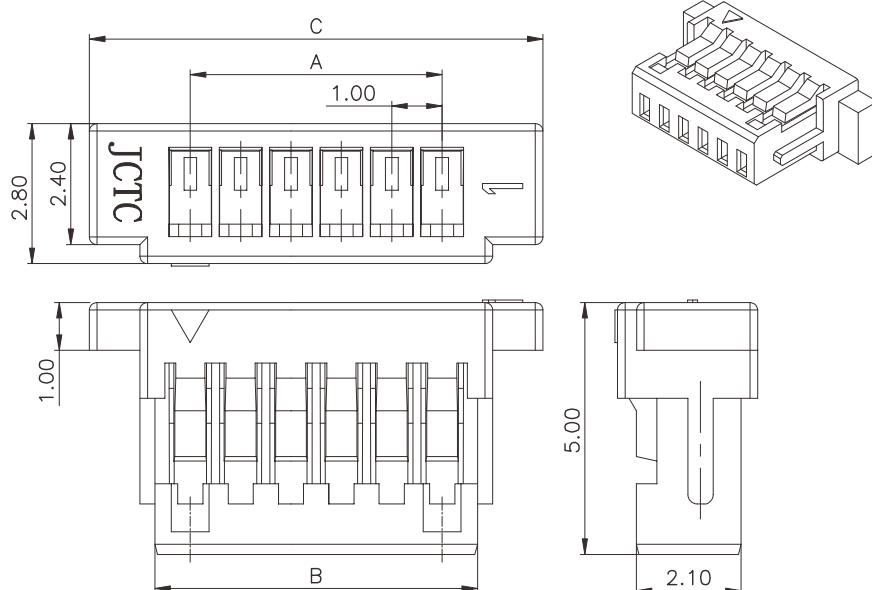

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2P	1.00	2.40	5.00
3P	2.00	3.40	6.00
4P	3.00	4.40	7.00
5P	4.00	5.40	8.00
6P	5.00	6.40	9.00
7P	6.00	7.40	10.00
8P	7.00	8.40	11.00
9P	8.00	9.40	12.00
10P	9.00	10.40	13.00
11P	10.00	11.40	14.00
12P	11.00	12.40	15.00
13P	12.00	13.40	16.00
14P	13.00	14.40	17.00
15P	14.00	15.40	18.00
16P	15.00	16.40	19.00
17P	16.00	17.40	20.00
18P	17.00	18.40	21.00
19P	18.00	19.40	22.00
20P	19.00	20.40	23.00
21P	20.00	21.40	24.00


Unit: mm

11002H00-NP-2-**-

1.00mm pitch Single Row Housing

Reference Informations:

- *Material: PBT, UL94V-0 or Nylon 66, UL94V-0
- *Suitable JCTC 11002 series Terminal
- *Mates with JCTC 11002 series single row Wafer

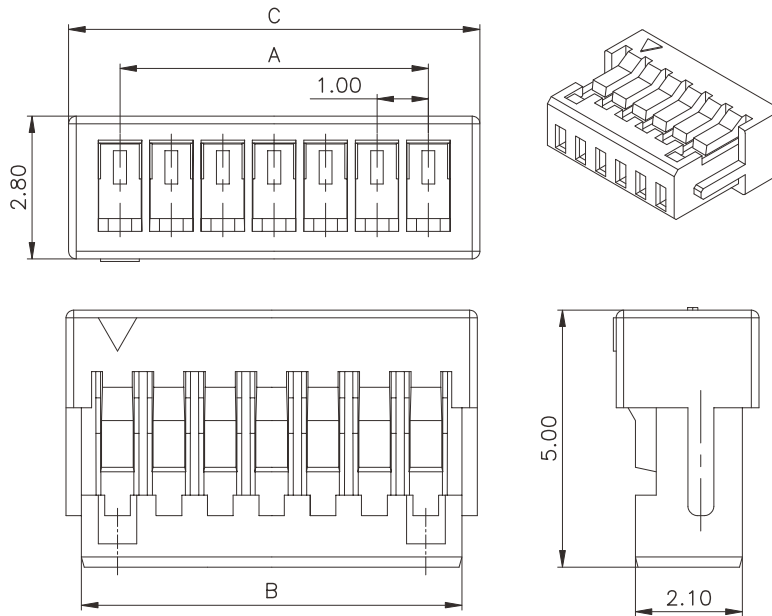

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2P	1.00	2.40	3.00
3P	2.00	3.40	4.00
4P	3.00	4.40	5.00
5P	4.00	5.40	6.00
6P	5.00	6.40	7.00
7P	6.00	7.40	8.00
8P	7.00	8.40	9.00
9P	8.00	9.40	10.00
10P	9.00	10.40	11.00
11P	10.00	11.40	12.00
12P	11.00	12.40	13.00
13P	12.00	13.40	14.00
14P	13.00	14.40	15.00
15P	14.00	15.40	16.00
16P	15.00	16.40	17.00
17P	16.00	17.40	18.00
18P	17.00	18.40	19.00
19P	18.00	19.40	20.00
20P	19.00	20.40	21.00
21P	20.00	21.40	22.00


Unit: mm

11002H00-NP-T-**-

1.00mm pitch Single Row Housing

Reference Informations:

- *Material: PBT, UL94V-0 or Nylon 66, UL94V-0
- *Suitable JCTC 11002 series Terminal
- *Mates with JCTC 11002 series single row Wafer

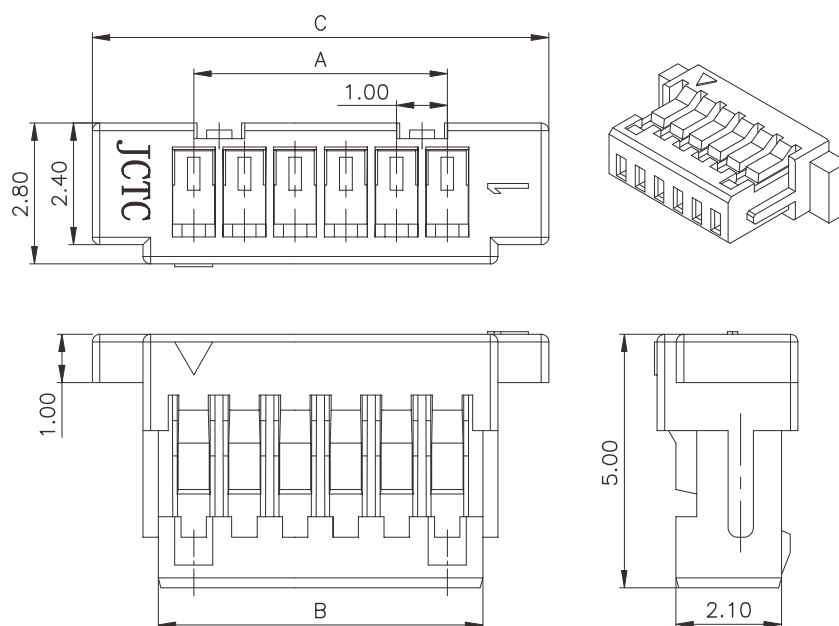

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2P	1.00	2.40	5.00
3P	2.00	3.40	6.00
4P	3.00	4.40	7.00
5P	4.00	5.40	8.00
6P	5.00	6.40	9.00
7P	6.00	7.40	10.00
8P	7.00	8.40	11.00
9P	8.00	9.40	12.00
10P	9.00	10.40	13.00
11P	10.00	11.40	14.00
12P	11.00	12.40	15.00
13P	12.00	13.40	16.00
14P	13.00	14.40	17.00
15P	14.00	15.40	18.00
16P	15.00	16.40	19.00
17P	16.00	17.40	20.00
18P	17.00	18.40	21.00
19P	18.00	19.40	22.00
20P	19.00	20.40	23.00
21P	20.00	21.40	24.00

Unit: mm

11002H00-2xNP-**



1.00mm pitch Dual Row Housing

Reference Informations:

*Material: PBT, UL94V-0 or Nylon 66, UL94V-0

*Suitable JCTC 11002 series Terminal

*Mates with JCTC 11002 series dual row Wafer

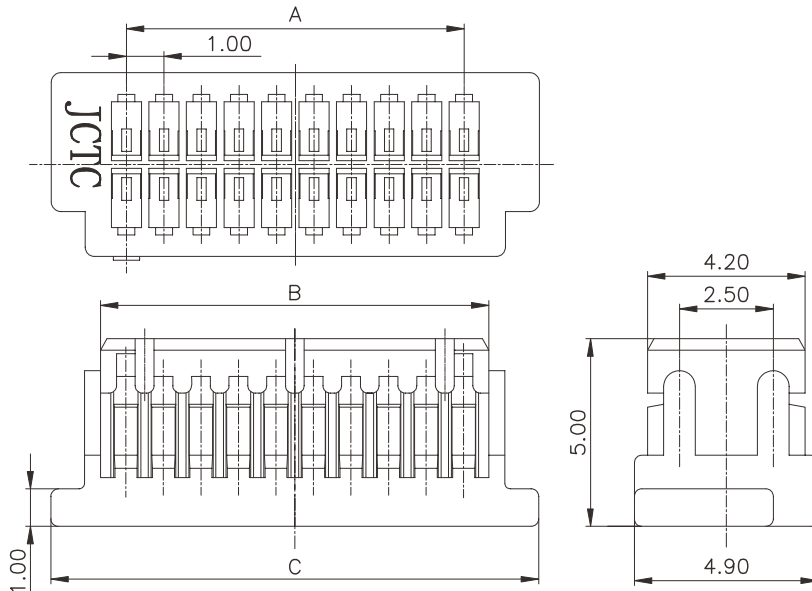

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2*5P	4.00	5.35	8.00
2*6P	5.00	6.35	9.00
2*8P	7.00	8.35	11.00
2*9P	8.00	9.35	12.00
2*10P	9.00	10.35	13.00
2*12P	11.00	12.35	15.00
2*15P	14.00	15.35	18.00
2*18P	17.00	18.35	21.00
2*20P	19.00	20.35	23.00
2*25P	24.00	25.35	28.00

Unit: mm

11002H00-2xNP-L-**



1.00mm pitch Dual Row Housing-With LOCK

Reference Informations:

*Material: PBT, UL94V-0 or Nylon 66, UL94V-0

*Suitable JCTC 11002 series Terminal

*Mates with JCTC 11002 series dual row Wafer

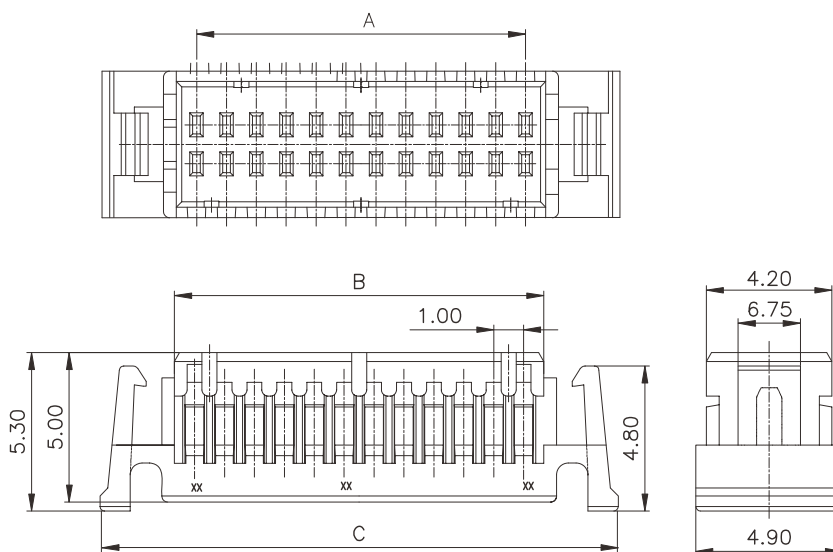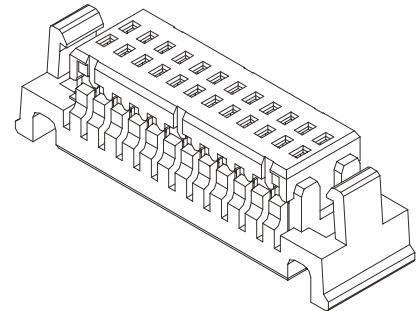

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2*5P	4.00	5.35	10.32
2*6P	5.00	6.35	11.32
2*8P	7.00	8.35	13.32
2*9P	8.00	9.35	14.32
2*10P	9.00	10.35	15.32
2*12P	11.00	12.35	17.32
2*15P	14.00	15.35	20.32
2*18P	17.00	18.35	23.32
2*20P	19.00	20.35	25.32
2*25P	24.00	25.35	30.32

Unit: mm

11002W90-NP-S

— 1.00mm pitch 90° Single Row Wafer – SMT TYPE


Reference Informations:

*Material: Pin: Phosphor Bronze/Tin-plated

Solder Tabs: Brass/Tin-plated

Wafer: Nylon 6T, UL94V-0


*Mates with JCTC 11002 series single row Housing



Dimensional Information:

Part No.	Dimensions	
	A	B
2P	1.00	4.00
3P	2.00	5.00
4P	3.00	6.00
5P	4.00	7.00
6P	5.00	8.00
7P	6.00	9.00
8P	7.00	10.00
9P	8.00	11.00
10P	9.00	12.00
11P	10.00	13.00
12P	11.00	14.00
13P	12.00	15.00
14P	13.00	16.00
15P	14.00	17.00
16P	15.00	18.00
17P	16.00	19.00
18P	17.00	20.00
19P	18.00	21.00
20P	19.00	22.00
21P	20.00	23.00

Unit: mm

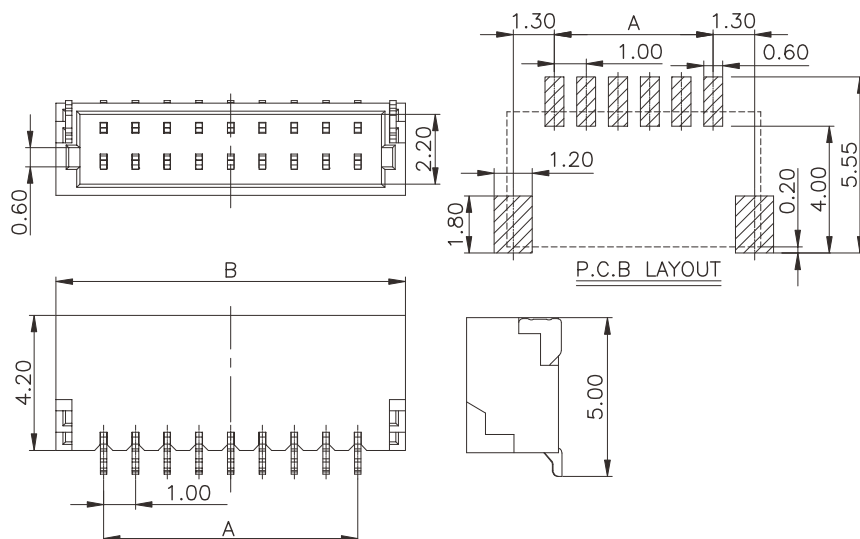
11002W00-NP-S

— 1.00mm pitch 180° Single Row Wafer – SMT TYPE

Reference Informations:


*Material: Pin: Phosphor Bronze/Tin-plated

Solder Tabs: Brass/Tin-plated

Wafer: Nylon 6T, UL94V-0

Cap: Nylon 6T, UL94V-0


*Mates with JCTC 11002 series single row Housing



Dimensional Information:

Part No.	Dimensions	
	A	B
2P	1.00	4.00
3P	2.00	5.00
4P	3.00	6.00
5P	4.00	7.00
6P	5.00	8.00
7P	6.00	9.00
8P	7.00	10.00
9P	8.00	11.00
10P	9.00	12.00
11P	10.00	13.00
12P	11.00	14.00
13P	12.00	15.00
14P	13.00	16.00
15P	14.00	17.00
16P	15.00	18.00
17P	16.00	19.00
18P	17.00	20.00
19P	18.00	21.00
20P	19.00	22.00
21P	20.00	23.00

Unit: mm

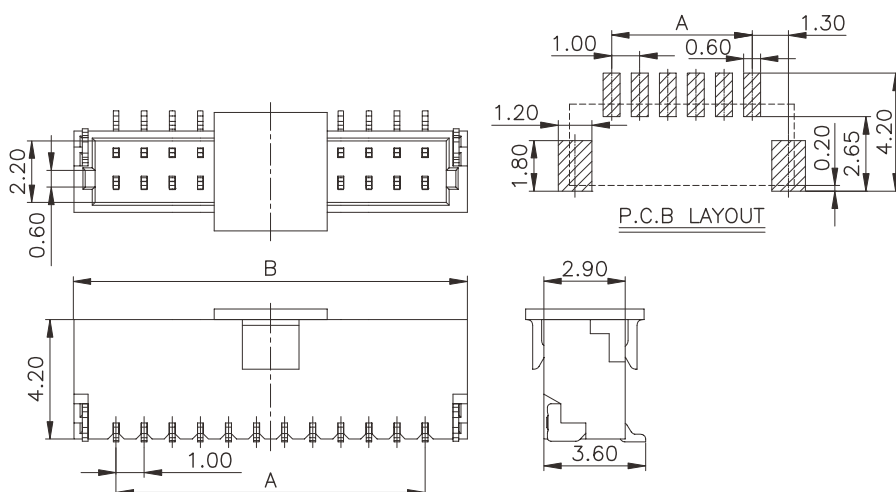

11002W90-NP-SK

1.00mm pitch 90° Single Row Wafer - SMT TYPE


Reference Informations:

*Material: Pin: Phosphor Bronze/Tin-plated

Solder Tabs: Brass/Tin-plated


Wafer: Nylon 6T, UL94V-0

*Mates with JCTC 11002 series single row Housing


Dimensional Information:

Part No.	Dimensions	
	A	B
2P	1.00	4.00
3P	2.00	5.00
4P	3.00	6.00
5P	4.00	7.00
6P	5.00	8.00
7P	6.00	9.00
8P	7.00	10.00
9P	8.00	11.00
10P	9.00	12.00
11P	10.00	13.00
12P	11.00	14.00
13P	12.00	15.00
14P	13.00	16.00
15P	14.00	17.00
16P	15.00	18.00
17P	16.00	19.00
18P	17.00	20.00
19P	18.00	21.00
20P	19.00	22.00
21P	20.00	23.00

Unit: mm

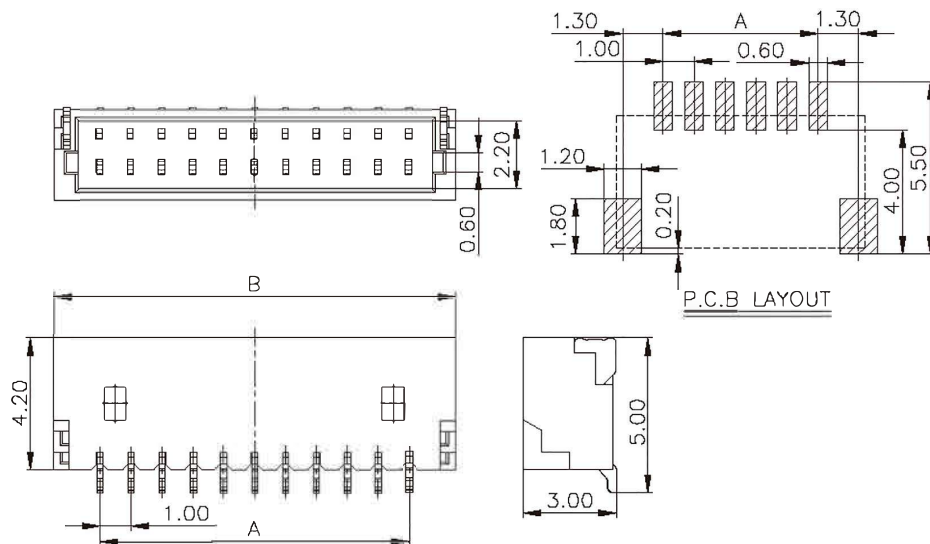
11002W00-2xNP-SF

1.00mm pitch 180° Dual Row Wafer -SMT TYPE

Reference Informations:


*Material: Pin: Phosphor Bronze/Gold-flash

Solder Tabs: Brass/Tin-plated

Wafer: Nylon 6T, UL94V-0


Cap: Nylon 6T, UL94V-0

*Mates with JCTC 11002 series dual row Housing


Dimensional Information:

Part No.	Dimensions	
	A	B
2*5P	4.00	7.30
2*6P	5.00	8.30
2*8P	7.00	10.30
2*9P	8.00	11.30
2*10P	9.00	12.30
2*12P	11.00	14.30
2*15P	14.00	17.30
2*20P	19.00	22.30
2*25P	24.00	27.30

Unit: mm

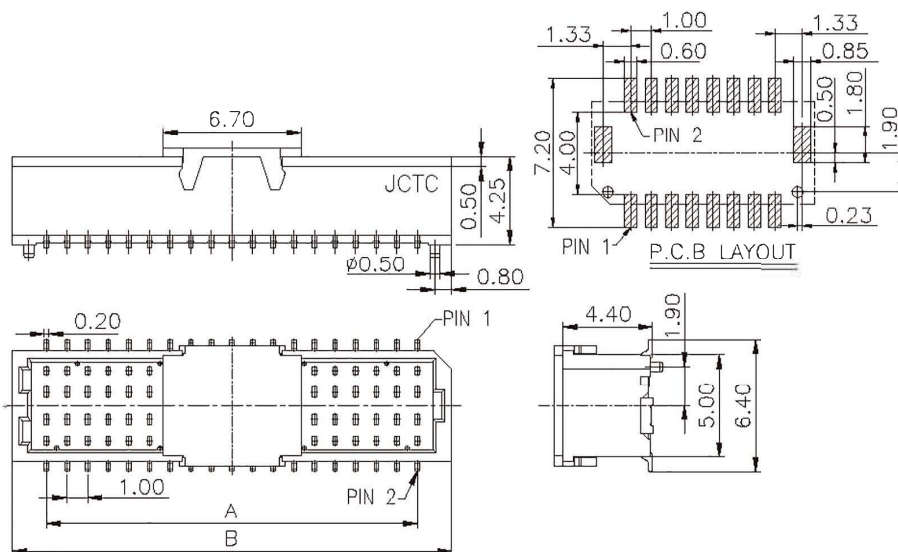

11002W90-2xNP-S-L — 1.00mm pitch 90° Dual Row Wafer -SMT TYPE



Reference Informations:

*Material: Pin: Phosphor Bronze/Gold-flash

Solder Tabs: Brass/Tin-plated

Wafer: Nylon 6T, UL94V-0

*Mates with JCTC 11002L series dual row Housing

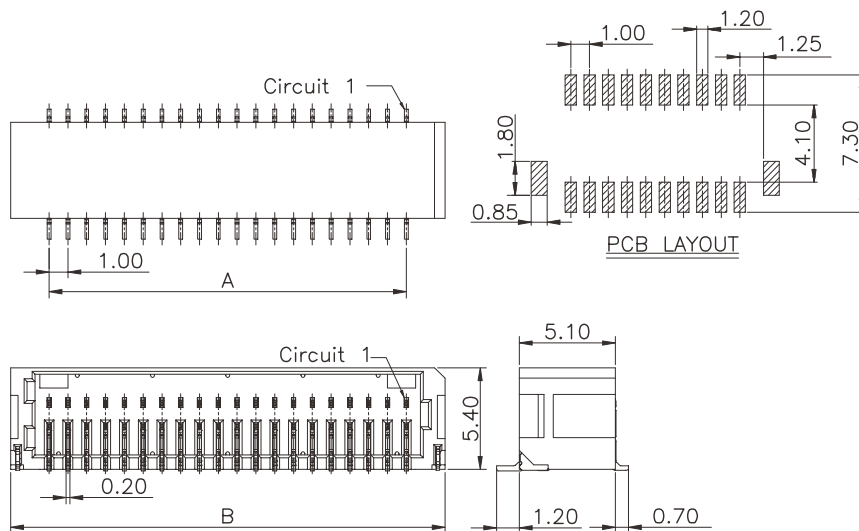

Dimensional Information:

Part No.	Dimensions	
	A	B
2*5P	4.00	8.10
2*6P	5.00	9.10
2*8P	7.00	11.10
2*9P	8.00	12.10
2*10P	9.00	13.10
2*12P	11.00	15.10
2*15P	14.00	18.10
2*20P	19.00	23.10
2*25P	24.00	28.10

Unit: mm