


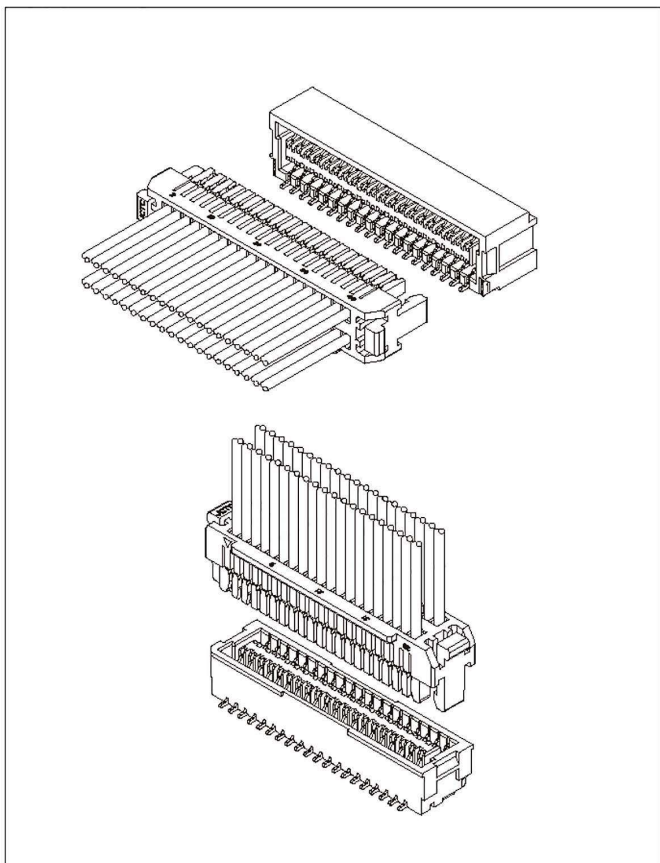

Specifications

Current rating: 1 A AC, DC

Voltage rating: 50V AC, DC

Temperature range: -25° C ~ +85° C

Contact resistance: 30mΩ Max.

Insulation resistance: 100MΩ Min.

Withstanding voltage: 500V AC/minute



Contact JCTC for details

Standards



E338796

Assembly layout

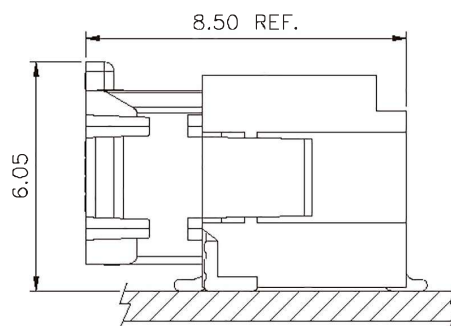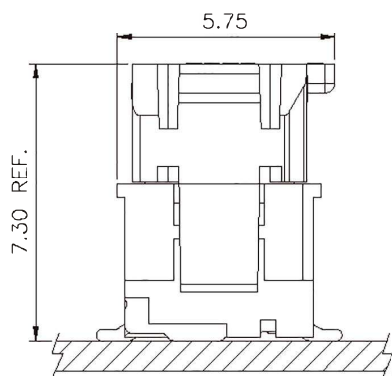


CRIMP TYPE

11006TOP-**

1.00mm pitch Crimp Terminal

Reference Informations:

*Used in JCTC 11006 series Housing

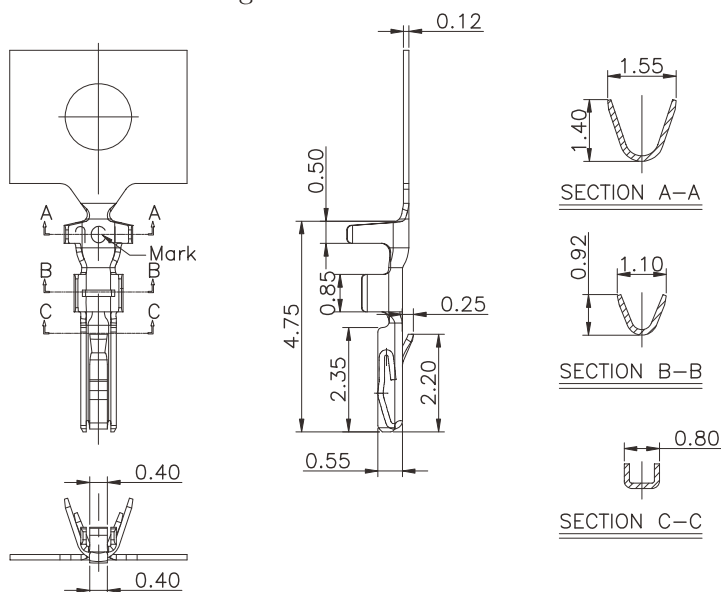

Ordering Information & Specifications

Unit: mm

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
11006TOP-**	AWG #28-#32	0.60mm(max)	Phosphor Bronze	Gold-flash contact area	15,000pcs

Note:* (o. A. . .)For contact JCTC

11006H00-NP-**


1.00mm pitch Single Row Housing

Reference Informations:

*Material: Housing: Nylon66 ,UL94V-0 /PBT ,UL94V-0

*Suitable JCTC 11006 Series Terminal

*Mates with JCTC 11006 Series Single Row Wafer

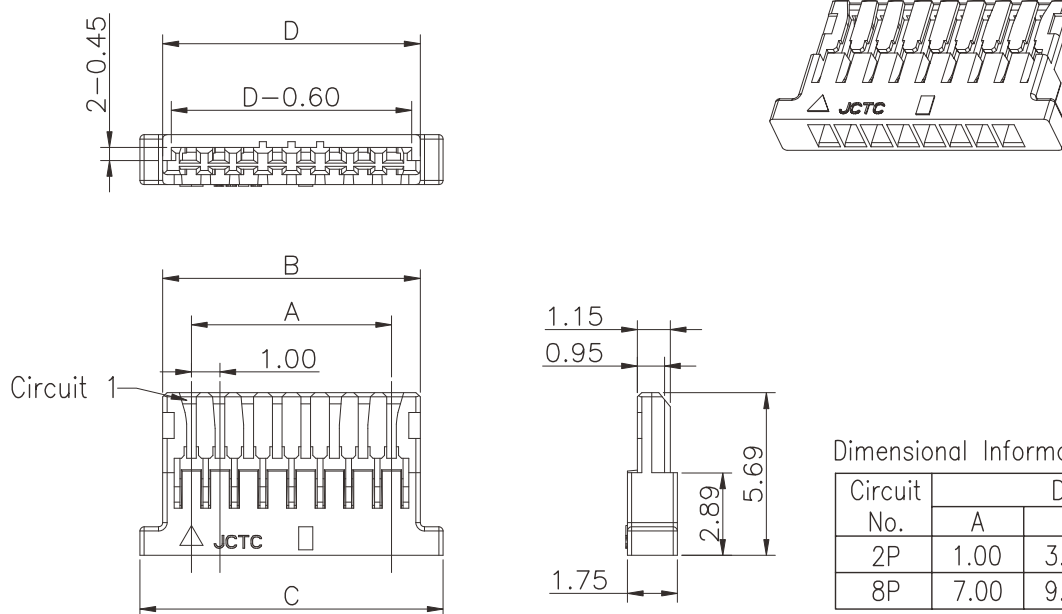

Dimensional Information:

Circuit No.	Dimensions			
	A	B	C	D
2P	1.00	3.00	4.60	3.00
8P	7.00	9.00	10.60	9.00

Unit: mm

11006H00-2*NP-L







1.00mm pitch Dual Row Housing

Reference Informations:

*Material: Housing: Nylon66 ,UL94V-0 /PBT ,UL94V-0

*Suitable JCTC 11006 Series Terminal

*Mates with JCTC 11006 Series Dual Row Wafer

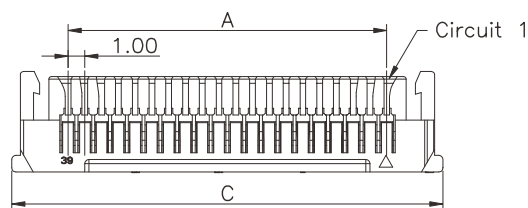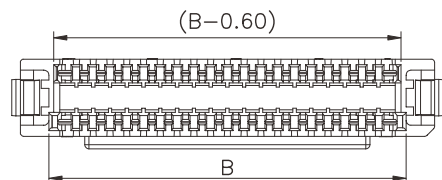

Dimensional Information:

Part No.	Dimensions			
	A	B	C	D
2*10P	9.00	11.30	15.70	12.40
2*12P	12.00	14.30	18.70	15.40
2*15P	14.00	16.30	20.70	17.40
2*20P	19.00	25.30	25.70	22.40

Unit: mm

11006W00-2*NP-S

1.00mm pitch 180° Dual Row Wafer







Reference Informations:

*Material: Pin: Phosphor Bronze/Gold-plated

Solder Tabs: Brass/Tin-plated

Wafer: Nylon 6T,UL94V-0

*Mates with JCTC 11006 series Dual Row Housing

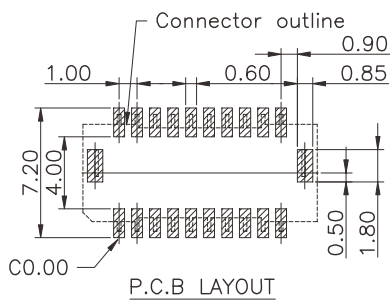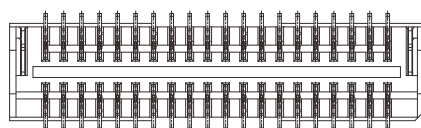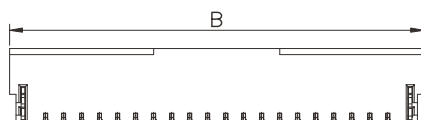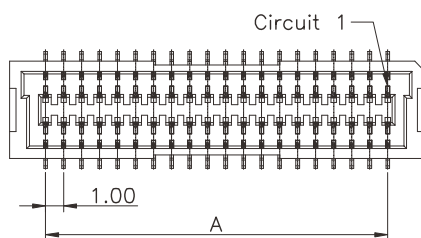

Dimensional Information:

Part No.	Dimensions	
	A	B
2*10P	9.00	13.00
2*15P	14.00	18.00
2*20P	19.00	23.00

Unit: mm

11006W90-2*NP-S

1.00mm pitch 90° Dual Row Wafer

Reference Informations:



*Material: Pin: Phosphor Bronze/Gold-plated

Solder Tabs: Brass/Tin-plated

Wafer: Nylon 6T, UL94V-0

Cap: Nylon 6T, UL94V-0

*Mates with JCTC 11006 series Dual Row Housing

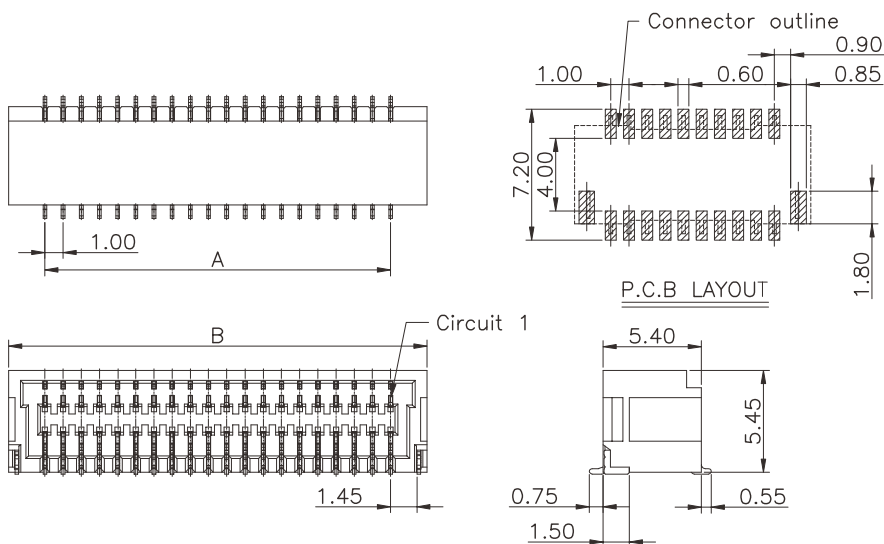

Dimensional Information:

Part No.	Dimensions	
	A	B
2*10P	9.00	13.00
2*15P	14.00	18.00
2*20P	19.00	23.00

Unit: mm