

Specifications

Current rating: 1 A AC, DC

Voltage rating: 50V AC, DC


Temperature range: -25° C ~ +85° C

Contact resistance: 20mΩ Max.



Insulation resistance: 100MΩ Min.

Withstanding voltage: 250V AC/minute

Contact JCTC for details

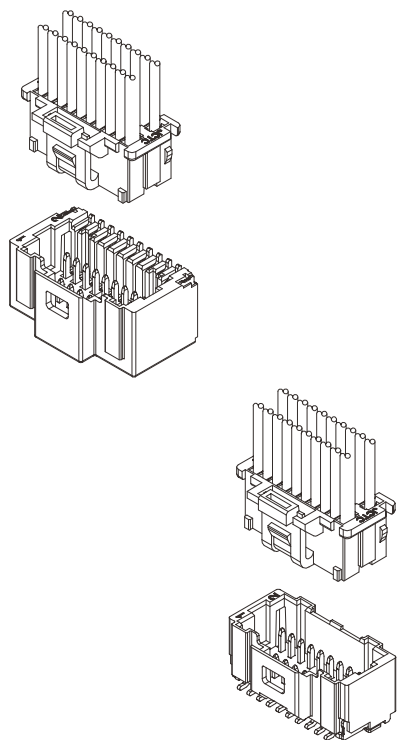

Assembly layout




CRIMP TYPE

11007TOP-**

1.00mm pitch Crimp Terminal

Reference Informations:

*Used in JCTC 11007 series Housing

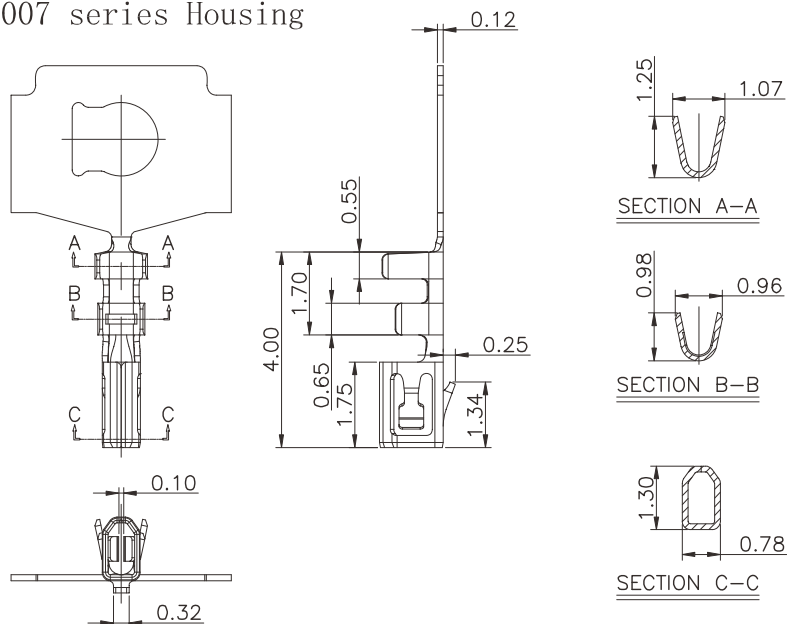

Ordering Information & Specifications

Unit: mm

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
11007TOP-**	AWG #28-#32	0.80mm(max)	Phosphor Bronze	Gold-flash contact area	15,000pcs

Note:* (o.A...)For contact JCTC

11007H00-NP-L-**



1.00mm pitch Single Row Housing

Reference Informations:

*Material: Nylon 66, UL94V-0

*Suitable JCTC 11007 Series Terminal

*Mates with JCTC 11007 Series SingleRow Wafer

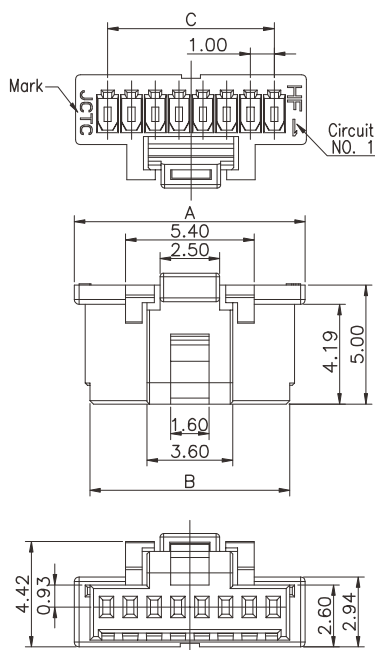

Dimensional Information:

Circuit No.	Dimensions		
	A	B	C
6P	7.70	6.40	5.00
7P	8.70	7.40	6.00
8P	9.70	8.40	7.00
9P	10.70	9.40	8.00
10P	11.70	10.40	9.00
11P	12.70	11.40	10.00
12P	13.70	12.40	11.00
13P	14.70	13.40	12.00
14P	15.70	14.40	13.00
15P	16.70	15.40	14.00

Unit: mm

11007H00-2*NP*-L




1.00mm pitch Dual Row Housing

Reference Informations:

*Material: Nylon 66, UL94V-0

*Suitable JCTC 11007 Series Terminal

*Mates with JCTC 11007 Series Dual Row Wafer

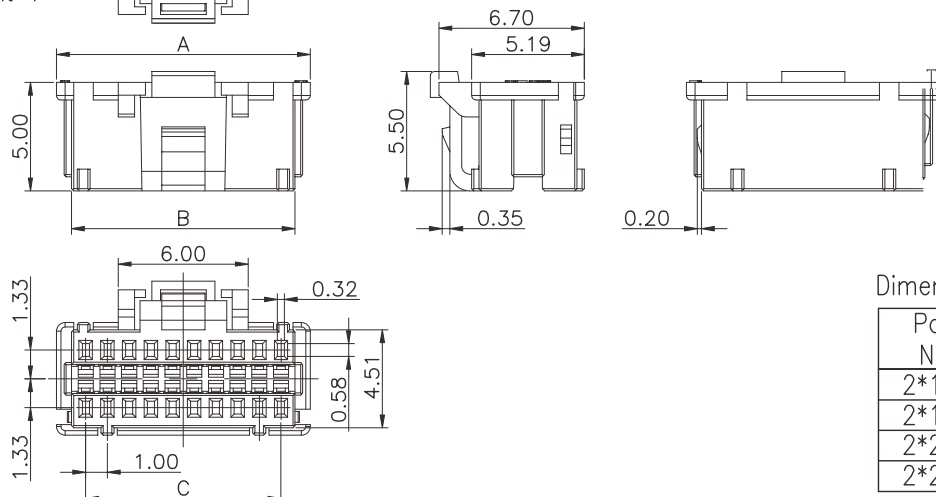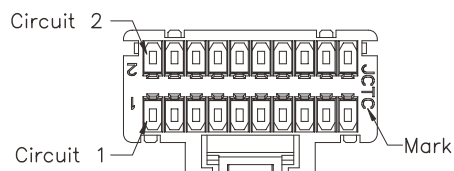

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2*10P	11.70	10.30	9.00
2*15P	16.70	15.30	14.00
2*20P	21.70	20.30	19.00
2*25P	26.70	26.30	24.00

Unit: mm

11007W90-2*NP-S

1.00mm pitch 90° Dual Row Wafer



Reference Informations:

*Material: Pin: Phosphor Bronze/Gold-plated

Solder Tabs: Brass/Tin-plated

Wafer: Nylon 6T, UL94V-0

*Mates with JCTC 11007 Series Dual Row Housing

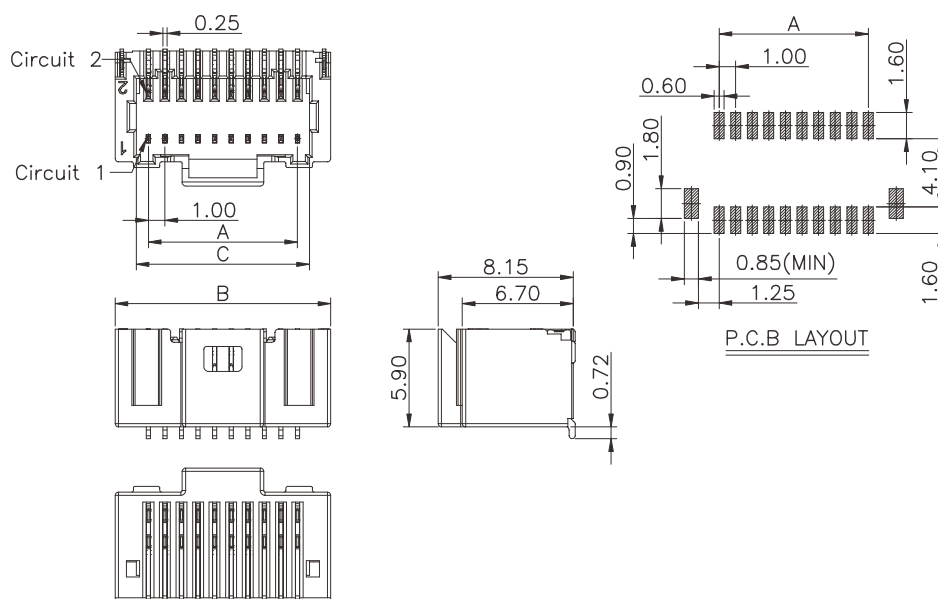

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2*10P	9.00	13.00	10.45
2*15P	14.00	18.00	15.45
2*20P	19.00	23.00	20.45
2*25P	24.00	28.00	25.45

Unit: mm

11007W00-2*NP-S

1.00mm pitch 180° Dual Row Wafer

Reference Informations:




*Material: Pin: Phosphor Bronze/Gold-plated

Solder Tabs: Brass/Tin-plated


Wafer: Nylon 6T, UL94V-0

Cap: Nylon 6T, UL94V-0

*Mates with JCTC 11007 Series Dual Row Housing

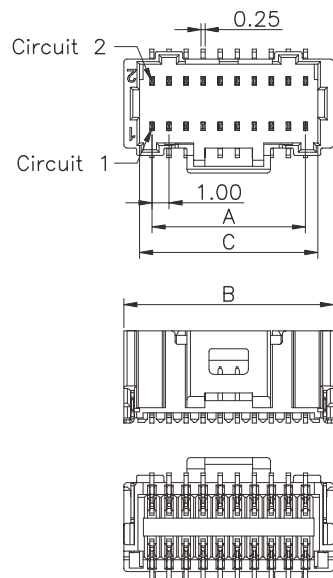

P.C.B LAYOUT


 CAP
 (FOR PICK AND PLACE SYSTEMS)

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2*10P	9.00	12.30	10.45
2*15P	14.00	17.30	15.45
2*20P	19.00	22.30	20.45
2*25P	24.00	27.30	25.45

Unit: mm

