

Specifications

Current rating: 1A AC, DC

Voltage rating: 50V AC, DC

Temperature range: -25° C ~ +85° C

Contact resistance: 30mΩ Max.

Insulation resistance: 100MΩ Min.

Withstanding voltage: 500V AC/minute



Contact JCTC for details

Standards



E338796

Assembly layout

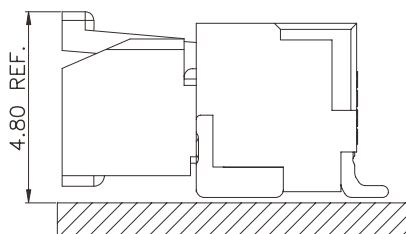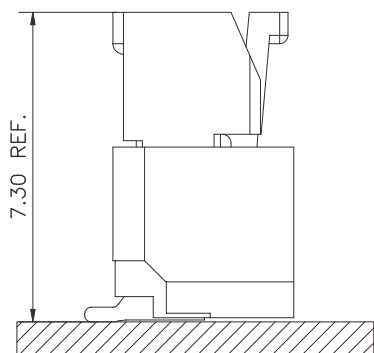


11257TOP-**

1.25mm pitch Crimp Terminal

Reference Informations:

*Used in JCTC 11257 series Housing

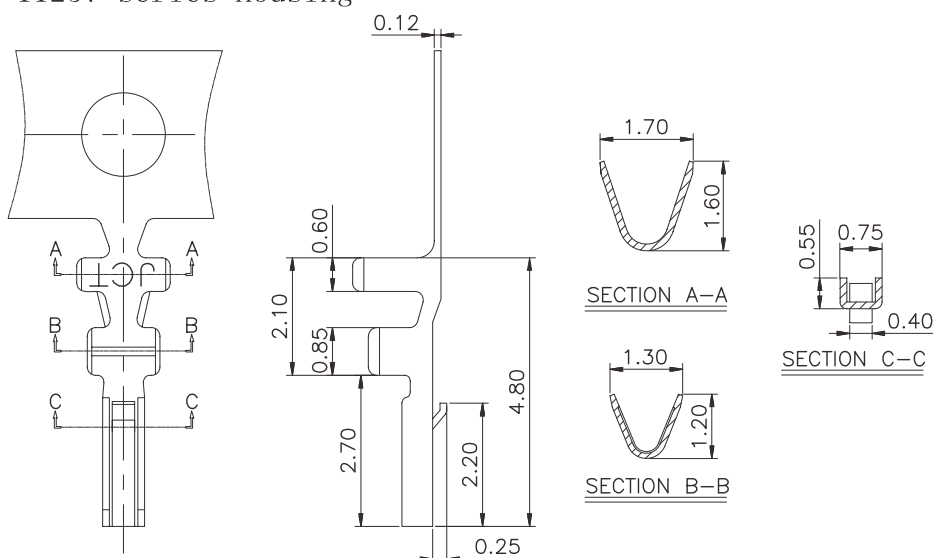

Ordering Information & Specifications

Unit: mm

Part No	Wire Range	Insulation O. D.	Material	Finish	Qty/reel
11257TOP-2E	AWG#28-#32	0.90mm(max)	Phosphor Bronze	Tin-plated	15,000pcs
11257TOP-0*	AWG#28-#32	0.90mm(max)	Phosphor Bronze	Gold-plated contact area	15,000pcs

Note:* (o. A...)For contact JCTC


11257H00-NP-L

1.25mm pitch Single Row Housing

Reference Informations:

*Material: Nylon 66, UL94V-0

*Suitable JCTC 11257 series Terminal

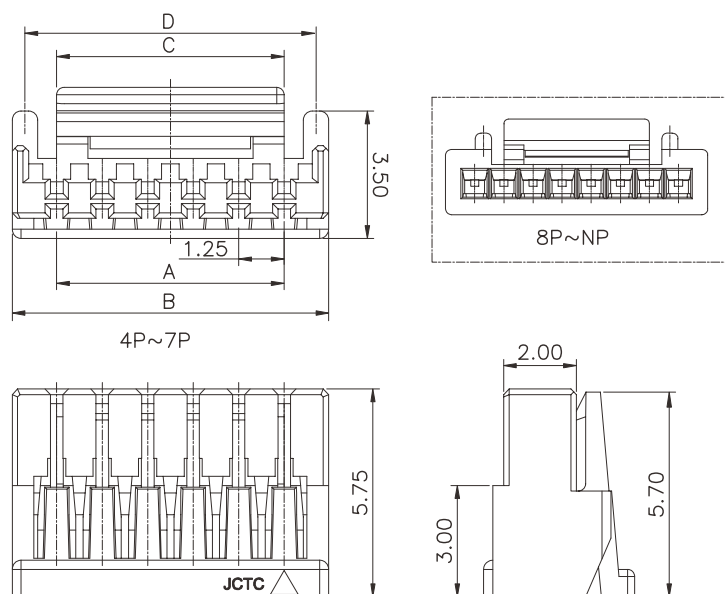

Dimensional Information:

Part No.	Dimensions			
	A	B	C	D
2P	1.25	3.65	1.95	3.20
3P	2.50	4.90	3.00	4.20
4P	3.75	6.15	4.25	5.45
5P	5.00	7.40	4.25	6.70
6P	6.25	8.65	6.25	8.00
7P	7.50	9.90	6.25	9.25
8P	8.75	11.15	6.25	8.00
9P	10.00	12.40	6.25	8.00
10P	11.25	13.65	8.25	10.00
11P	12.50	14.90	8.25	10.00
12P	13.75	16.15	8.25	10.00
13P	15.00	17.40	8.25	10.00
14P	16.25	18.65	8.25	10.00
15P	17.50	19.90	8.25	10.00

Unit: mm

11257W00-NP-S

— 1.25mm pitch 180° Single Row Wafer -SMT TYPE



Reference Informations:

*Material: Pin: Phosphor Bronze/Tin-plated

Solder Tabs: Brass/Tin-plated

Wafer: Nylon 6T, UL94V-0

*Mates with JCTC 11257 series single row Housing

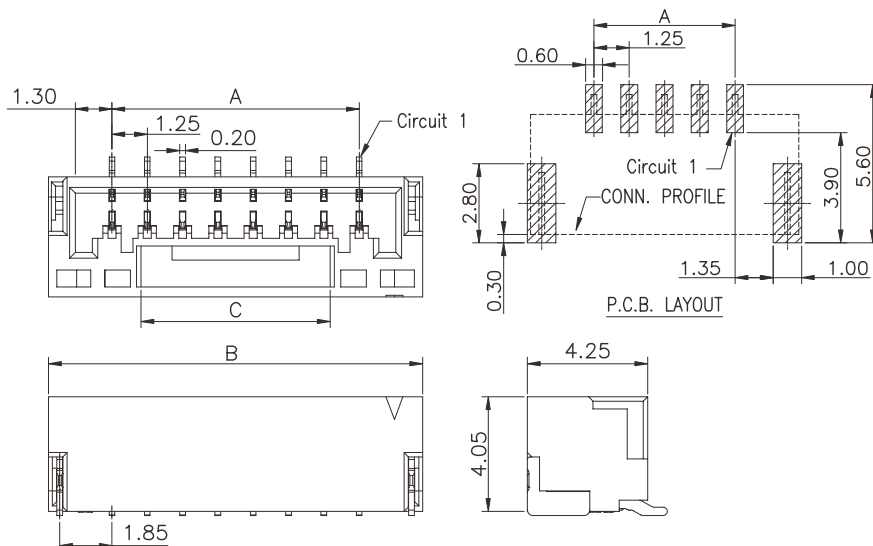

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2P	1.25	5.75	2.05
3P	2.50	7.00	3.30
4P	3.75	8.25	4.50
5P	5.00	9.50	4.50
6P	6.25	10.75	6.70
7P	7.50	12.00	6.70
8P	8.75	13.25	6.70
9P	10.00	14.50	6.70
10P	11.25	15.75	8.65
11P	12.50	17.00	8.65
12P	13.75	18.25	8.65
13P	15.00	19.50	8.65
14P	16.25	20.75	8.65
15P	17.50	22.00	8.65

Unit: mm

11257W90-NP-S

— 1.25mm pitch 90° Single Row Wafer -SMT TYPE



Reference Informations:

*Material: Pin: Phosphor Bronze/Tin-plated

Solder Tabs: Brass/Tin-plated

Wafer: Nylon 6T, UL94V-0

*Mates with JCTC 11257 series single row Housing

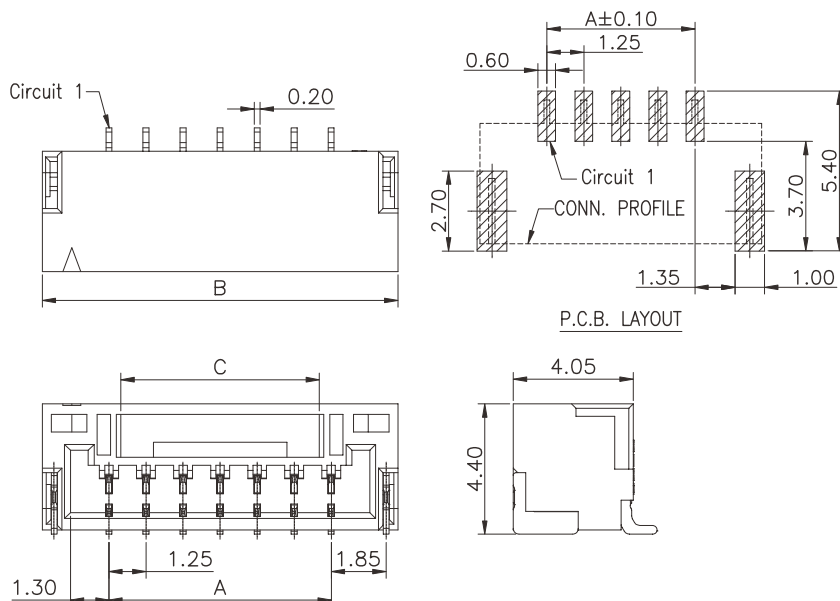

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2P	1.25	5.75	2.05
3P	2.50	7.00	3.30
4P	3.75	8.25	4.50
5P	5.00	9.50	4.50
6P	6.25	10.75	6.70
7P	7.50	12.00	6.70
8P	8.75	13.25	6.70
9P	10.00	14.50	6.70
10P	11.25	15.75	8.65
11P	12.50	17.00	8.65
12P	13.75	18.25	8.65
13P	15.00	19.50	8.65
14P	16.25	20.75	8.65
15P	17.50	22.00	8.65

Unit: mm