


Specifications

Current rating: 1A AC, DC
Voltage rating: 50V AC, DC
Temperature range: -25° C ~ +85° C
Contact resistance: 20mΩ Max.
Insulation resistance: 500MΩ Min.
Withstanding voltage: 500V AC/minute
Contact JCTC for details


Standards

 E338796

Assembly layout

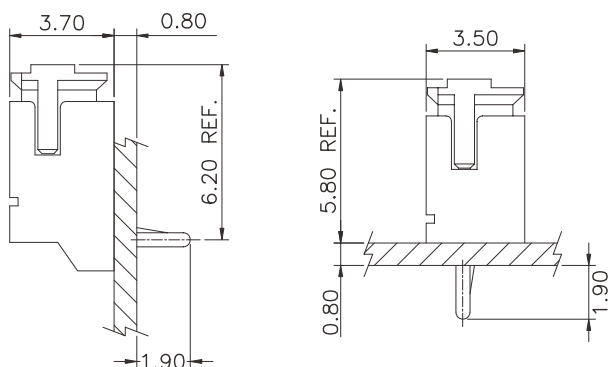

DIP TYPE

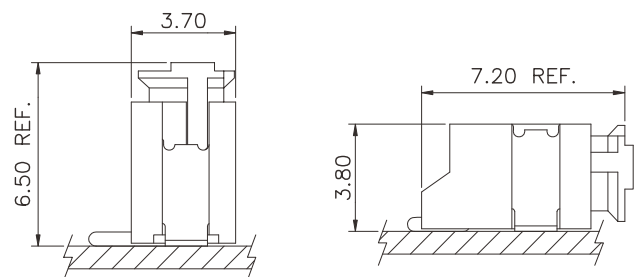


SMT TYPE

11501TOP-**

1.50mm pitch Crimp Terminal

Reference Informations:

*Used in JCTC 11501 series Housing

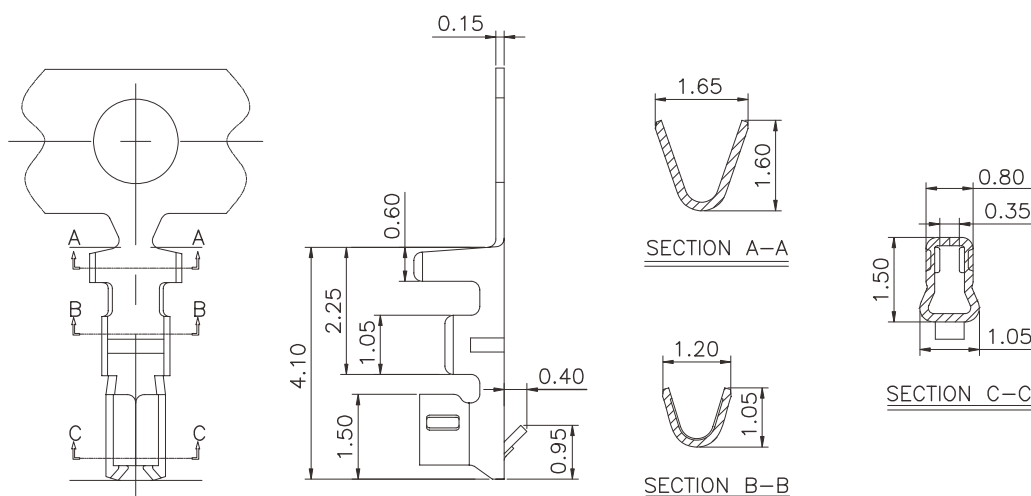

Ordering Information & Specifications

Unit: mm

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
11501TOP-2E	AWG#28-#32	0.90mm(max)	Phosphor Bronze	Tin-plated	15,000pcs
11501TOP-**	AWG#28-#32	0.90mm(max)	Phosphor Bronze	Gold-plated	15,000pcs

Note:* (o.A...)For contact JCTC

11501H00-NP



1.50mm pitch Single Row Housing

Reference Informations:

*Material: Nylon 66, UL94V-0

*Suitable JCTC 11501 series Terminal

*Mates with JCTC 11501 series Wafer

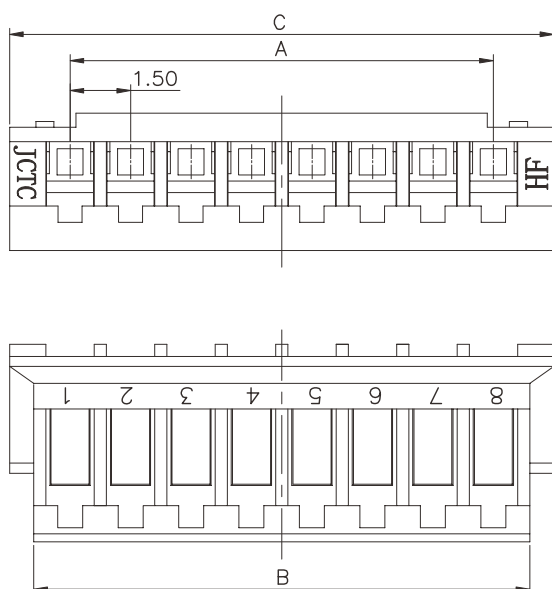

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2P	1.50	3.70	4.50
3P	3.00	5.20	6.00
4P	4.50	6.70	7.50
5P	6.00	8.20	9.00
6P	7.50	9.70	10.50
7P	9.00	11.20	12.00
8P	10.50	12.70	13.50
9P	12.00	14.20	15.00
10P	13.50	15.70	16.50
11P	15.00	17.20	18.00
12P	16.50	18.70	19.50
13P	18.00	20.20	21.00
14P	19.50	21.70	22.50
15P	21.00	23.20	24.00

Unit: mm

11501W90-NP*





1.50mm pitch 90° Wafer

Reference Informations:

*Material: Pin: Brass/Tin-plated

Wafer: Nylon 66, UL94V-0

*Mates with JCTC 11501 series Housing

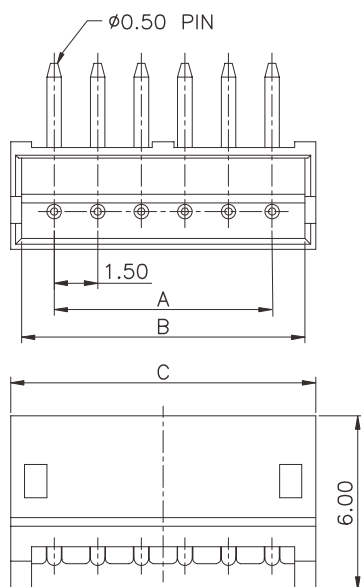

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2P	1.50	3.70	4.50
3P	3.00	5.20	6.00
4P	4.50	6.70	7.50
5P	6.00	8.20	9.00
6P	7.50	9.70	10.50
7P	9.00	11.20	12.00
8P	10.50	12.70	13.50
9P	12.00	14.20	15.00
10P	13.50	15.70	16.50
11P	15.00	17.20	18.00
12P	16.50	18.70	19.50
13P	18.00	20.20	21.00
14P	19.50	21.70	22.50
15P	21.00	23.20	24.00

Unit: mm

11501W00-NP*






1.50mm pitch 180° Wafer

Reference Informations:

*Material: Pin: Brass/Tin-plated

Wafer: Nylon 66, UL94V-0

*Mates with JCTC 11501 series Housing

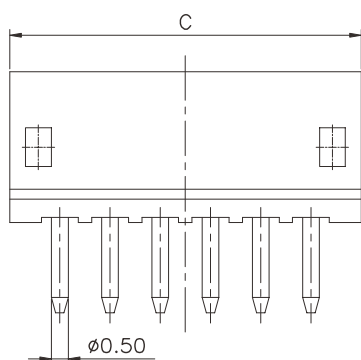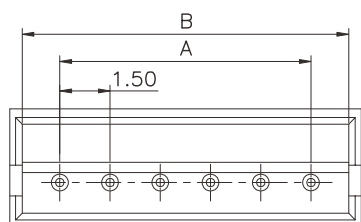

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2P	1.50	3.70	4.50
3P	3.00	5.20	6.00
4P	4.50	6.70	7.50
5P	6.00	8.20	9.00
6P	7.50	9.70	10.50
7P	9.00	11.20	12.00
8P	10.50	12.70	13.50
9P	12.00	14.20	15.00
10P	13.50	15.70	16.50
11P	15.00	17.20	18.00
12P	16.50	18.70	19.50
13P	18.00	20.20	21.00
14P	19.50	21.70	22.50
15P	21.00	23.20	24.00

Unit: mm

11501W90-NP-S

1.50mm pitch 90° Wafer - SMT TYPE



Reference Informations:

*Material: Pin: Brass/Gold-flash

Solder Tabs: Brass/Gold-flash

Wafer: Nylon 6T, UL94V-0

*Mates with JCTC 11501 series Housing

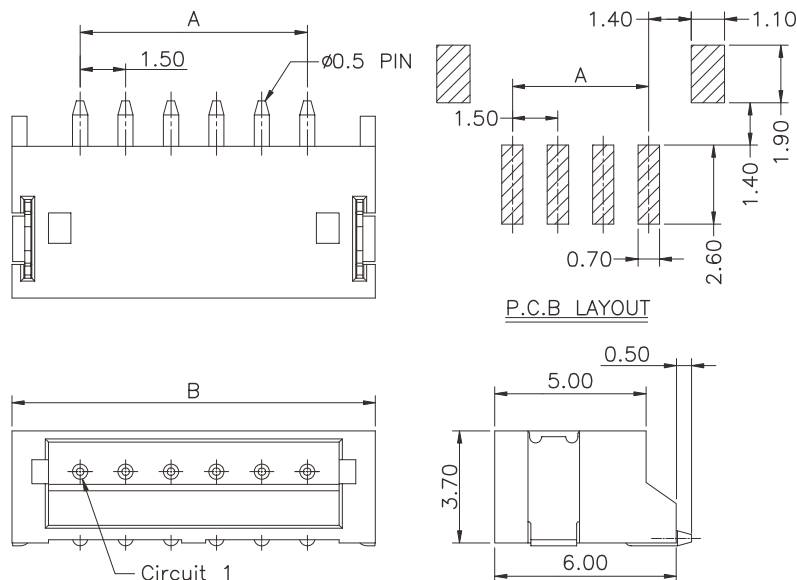

Dimensional Information:

Part No.	Dimensions	
	A	B
2P	1.50	6.00
3P	3.00	7.50
4P	4.50	9.00
5P	6.00	10.50
6P	7.50	12.00
7P	9.00	13.50
8P	10.50	15.00
9P	12.00	16.50
10P	13.50	18.00
11P	15.00	19.50
12P	16.50	21.00
13P	18.00	22.50
14P	19.50	24.00
15P	21.00	25.50

Unit: mm

11501W00-NP-S

1.50mm pitch 180° Wafer - SMT TYPE

Reference Informations:



*Material: Pin: Brass/Tin-plated

Solder Tabs: Brass/Tin-plated

Wafer: Nylon 6T, UL94V-0

Cap: Nylon 6T, UL94V-0

*Mates with JCTC 11501 series Housing

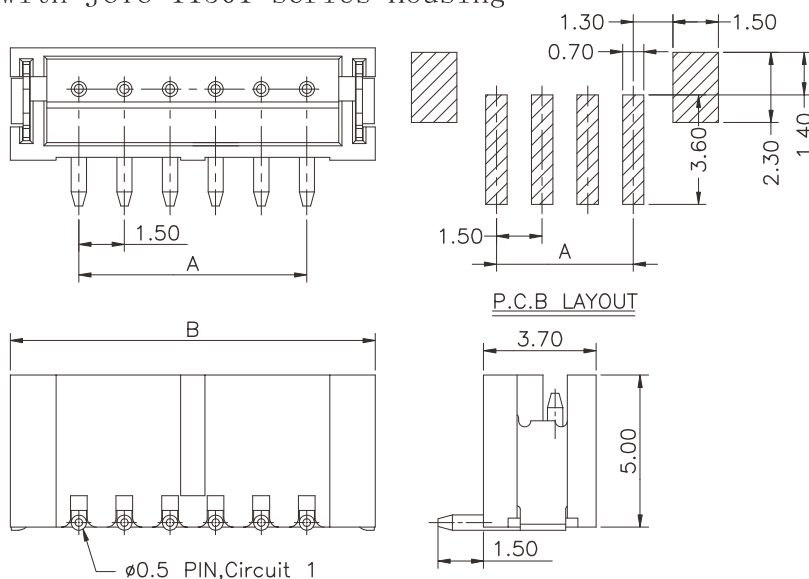

Dimensional Information:

Part No.	Dimensions	
	A	B
2P	1.50	6.00
3P	3.00	7.50
4P	4.50	9.00
5P	6.00	10.50
6P	7.50	12.00
7P	9.00	13.50
8P	10.50	15.00
9P	12.00	16.50
10P	13.50	18.00
11P	15.00	19.50
12P	16.50	21.00
13P	18.00	22.50
14P	19.50	24.00
15P	21.00	25.50

Unit: mm