

Specifications

Current rating: 3 A AC, DC

Voltage rating: 250V AC, DC

Temperature range: -25° C ~ +85° C

Contact resistance: 20mΩ Max.

Insulation resistance: 1000MΩ Min.

Withstanding voltage: 500V AC/minute


Contact JCTC for details

Standards



E338796

Assembly layout

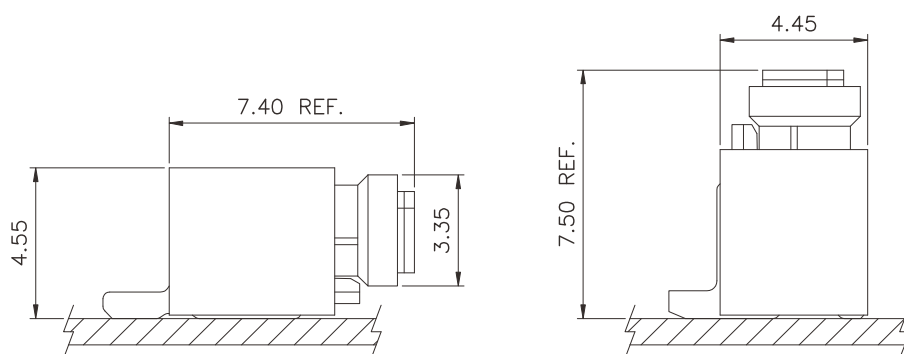


CRIMP TYPE

11500TOP-**

1.50mm pitch Crimp Terminal

Reference Informations:

*Used in JCTC 11500 series Housing

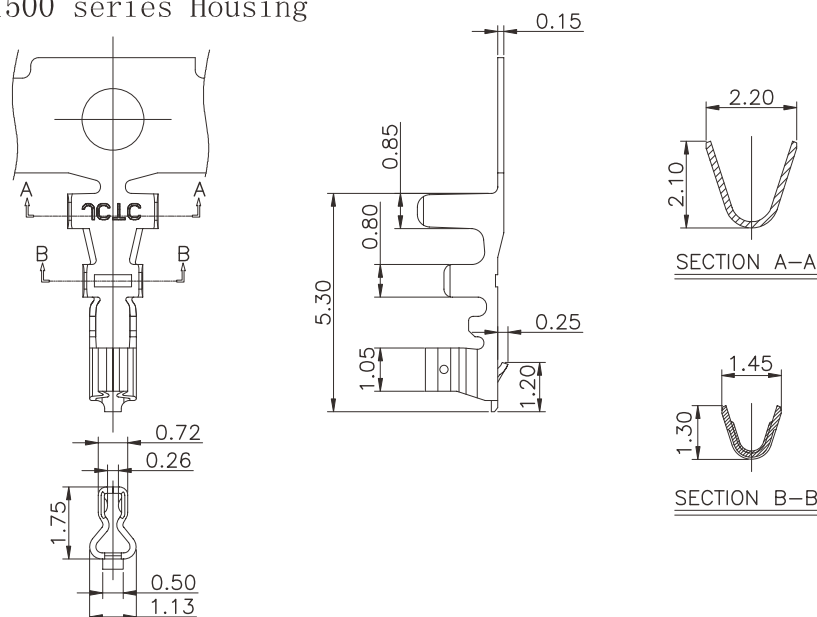

Ordering Information & Specifications

Unit: mm

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
11500TOP-**	AWG #24-#30	1.10mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

Note: * (o. A...) For contact JCTC

11500H00-NP



1.50mm pitch Single Row Housing

Reference Informations:

*Material: Housing: Nylon 66, UL94V-0

*Suitable JCTC 11500 series Terminal

*Mates with JCTC 11500 series Wafer

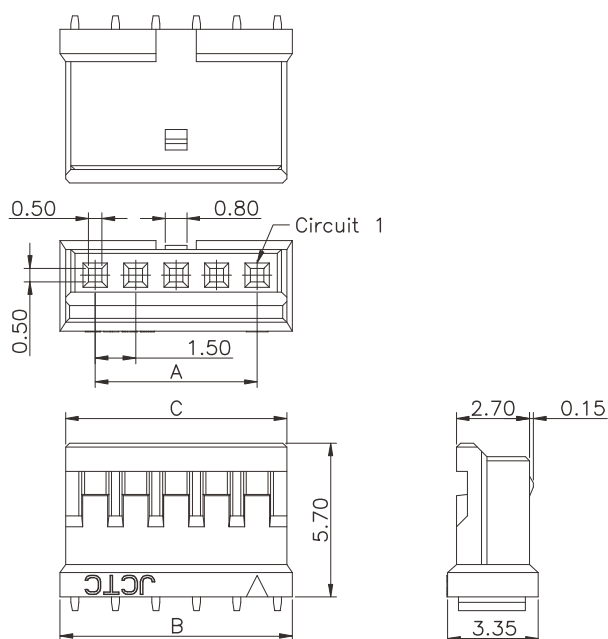

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2P	--	4.10	3.70
3P	3.00	5.60	5.20
4P	4.50	7.10	6.70
5P	6.00	8.60	8.20
6P	7.50	10.10	9.70
7P	9.00	11.60	11.20
8P	10.50	13.10	12.70
9P	12.00	14.60	14.20
10P	13.50	16.10	15.70
11P	15.00	17.60	17.20
12P	16.50	19.10	18.70
13P	18.00	20.60	20.20
14P	19.50	22.10	21.70
15P	21.00	23.60	23.20

Unit: mm

11500W00-NP-S



1.50mm pitch 180° Single Row Wafer

Reference Informations:

*Material: Pin: Brass/Tin-plated

Wafer: Nylon 6T, UL94V-0

*Mates with JCTC 11500 series Housing

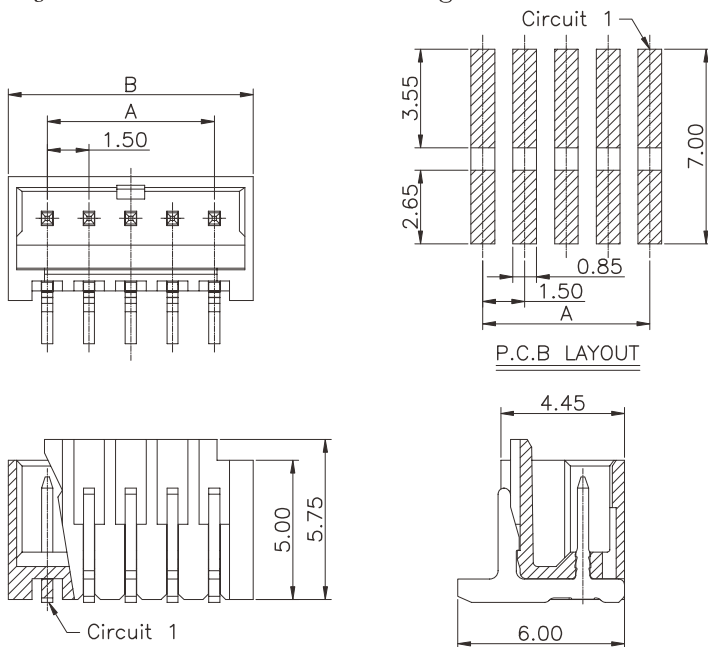

Dimensional Information:

Part No.	Dimensions	
	A	B
2P	--	4.30
3P	3.00	5.80
4P	4.50	7.30
5P	6.00	8.80
6P	7.50	10.30
7P	9.00	11.80
8P	10.50	13.30
9P	12.00	14.80
10P	13.50	16.30
11P	15.00	17.80
12P	16.50	19.30
13P	18.00	20.80
14P	19.50	22.30
15P	21.00	23.80

Unit: mm

11500W90-NP-S



1.50mm pitch 90° Single Row Wafer

Reference Informations:

*Material: Pin: Brass/Tin-plated

Wafer: Nylon 6T, UL94V-0

*Mates with JCTC 11500 series Housing

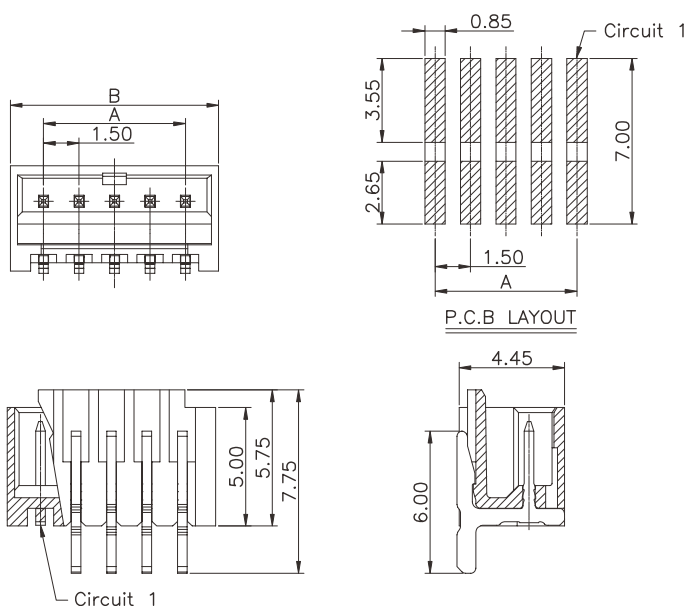

Dimensional Information:

Part No.	Dimensions	
	A	B
2P	--	4.30
3P	3.00	5.80
4P	4.50	7.30
5P	6.00	8.80
6P	7.50	10.30
7P	9.00	11.80
8P	10.50	13.30
9P	12.00	14.80
10P	13.50	16.30
11P	15.00	17.80
12P	16.50	19.30
13P	18.00	20.80
14P	19.50	22.30
15P	21.00	23.80

Unit: mm