


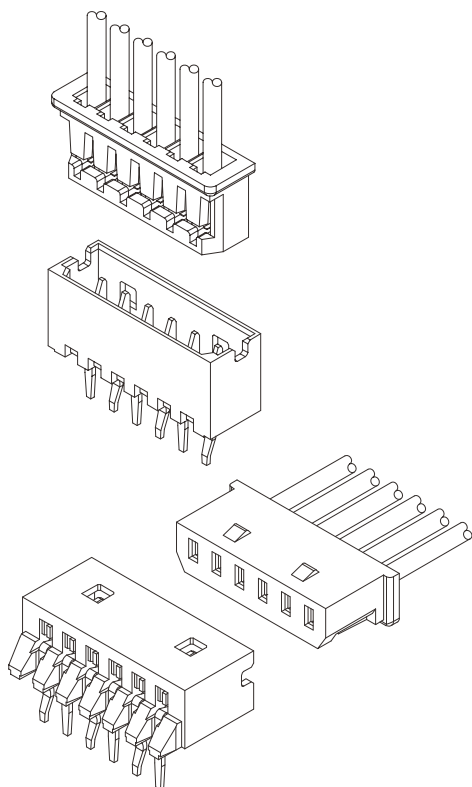

Specifications

Current rating: 2A AC, DC

Voltage rating: 125V AC, DC

Temperature range: -25° C ~ +85° C

Contact resistance: 20mΩ Max.

Insulation resistance: 1000MΩ Min.

Withstanding voltage: 500V AC/minute



Contact JCTC for details

Standards



E338796

Assembly layout

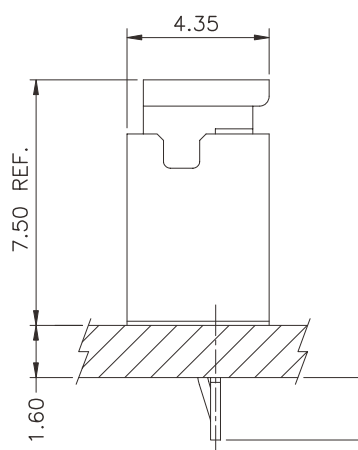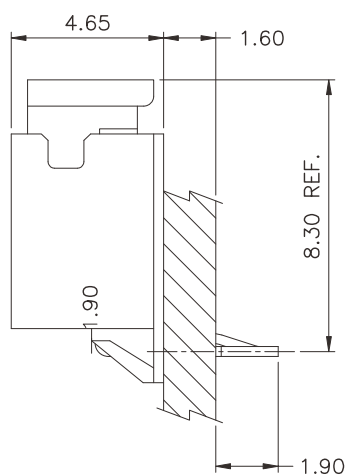


12006TOP-2

2.00mm pitch Crimp Terminal

Reference Informations:

*Used in JCTC 12006 series Housing

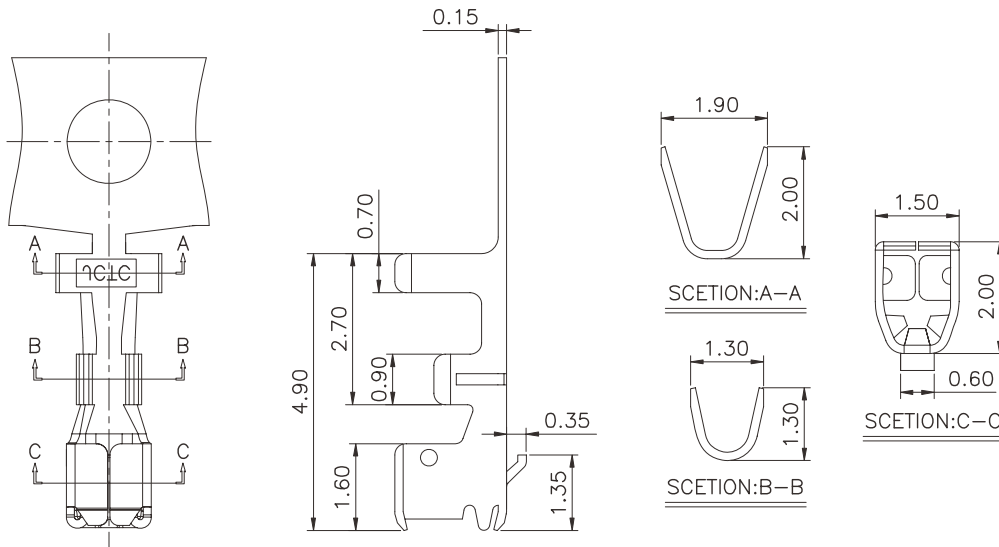

Ordering Information & Specifications

Unit: mm

Part No	Wire Range	Insulation O. D.	Material	Finish	Qty/reel
12006TOP-2	AWG#24-#30	1.40mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

Note: * (o. A...) For contact JCTC

12006H00-NP



2.00mm pitch Single Row Housing

Reference Informations:

*Material: Nylon 66, UL94V-0

*Suitable JCTC 12006 series Terminal

*Mates with JCTC 12006 series Wafer

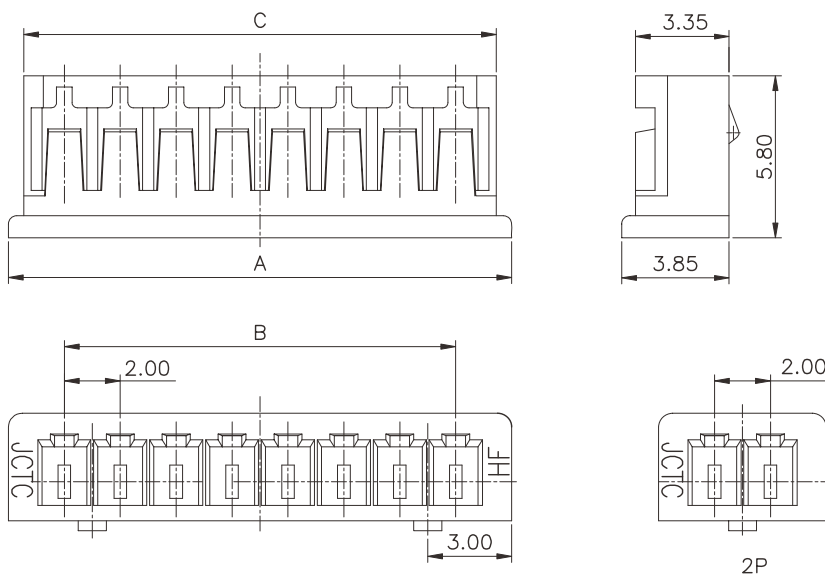

Dimensional Information:

Part No.	Dimensions		
	A	B	C
2P	6.00	---	4.90
3P	8.00	4.00	6.90
4P	10.00	6.00	8.90
5P	12.00	8.00	10.90
6P	14.00	10.00	12.90
7P	16.00	12.00	14.90
8P	18.00	14.00	16.90
9P	20.00	16.00	18.90
10P	22.00	18.00	20.90
11P	24.00	20.00	22.90
12P	26.00	22.00	24.90
13P	28.00	24.00	26.90
14P	30.00	26.00	28.90
15P	32.00	28.00	30.90

Unit: mm

12006W90-NP



2.00mm pitch 90° Wafer

Reference Informations:

*Material: Pin: Phosphor Bronze/Tin-plated

Wafer: Nylon 66, UL94V-0

*Mates with JCTC 12006 series Housing

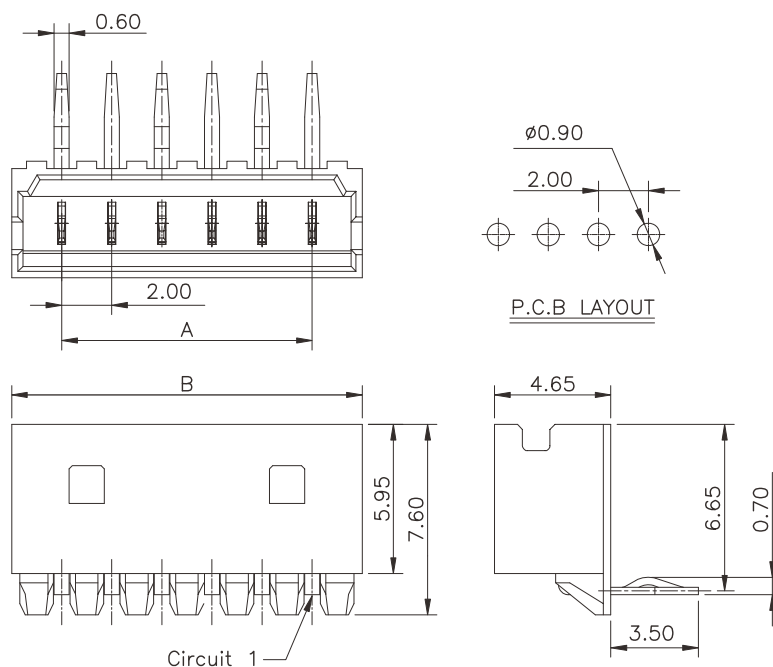

Dimensional Information:

Part No.	Dimensions	
	A	B
2P	2.00	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00

Unit: mm

12006W00-NP



2.00mm pitch 180° Wafer

Reference Informations:

*Material: Pin: Phosphor Bronze/Tin-plated

Wafer: Nylon 66, UL94V-0

*Mates with JCTC 12006 series Housing

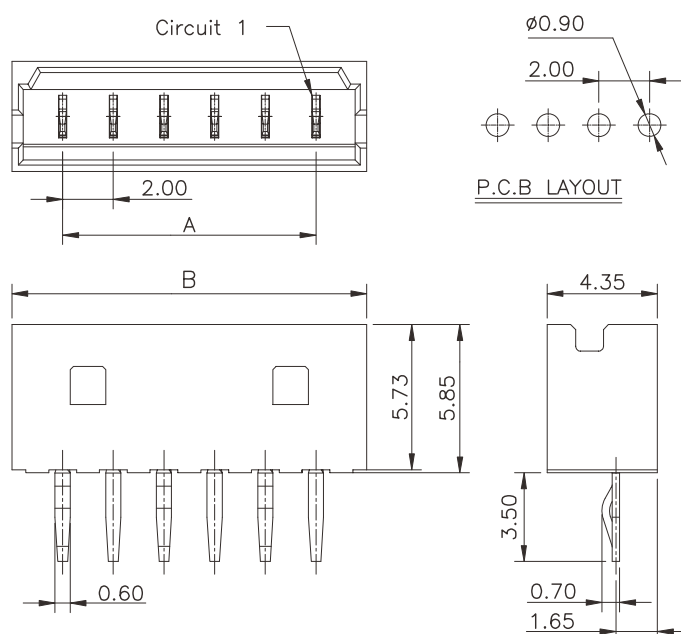

Dimensional Information:

Part No.	Dimensions	
	A	B
2P	2.00	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00

Unit: mm