


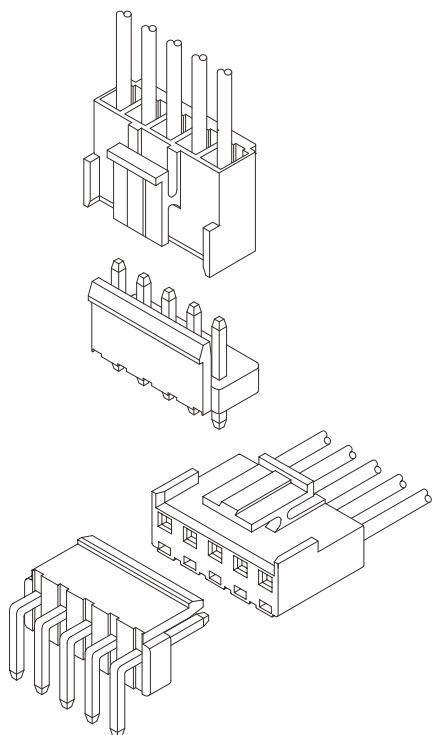

Specifications

Current rating: 7A AC, DC

Voltage rating: 250V AC, DC

Temperature range: -25° C ~ +85° C

Contact resistance: 10mΩ Max.

Insulation resistance: 1000MΩ Min.

Withstanding voltage: 1500V AC/minute



Contact JCTC for details

Standards



E338796

Assembly layout

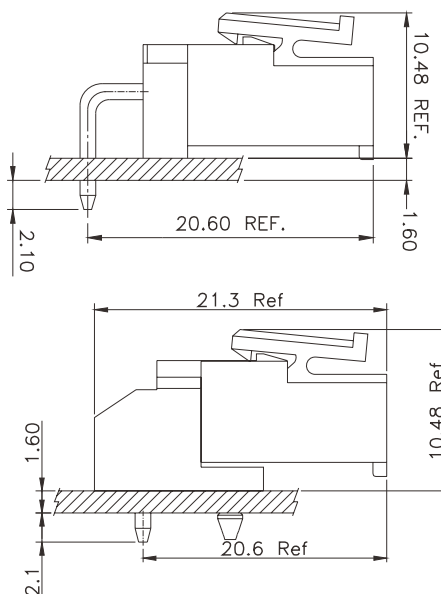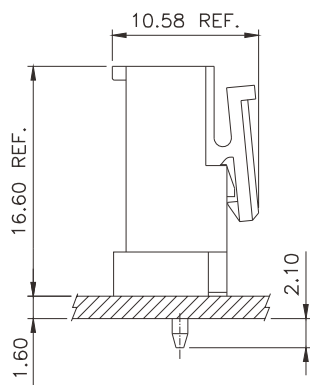


13962TOB-2

3.96mm pitch Crimp Terminal

Reference Informations:

*Used in JCTC 13962 series Housing

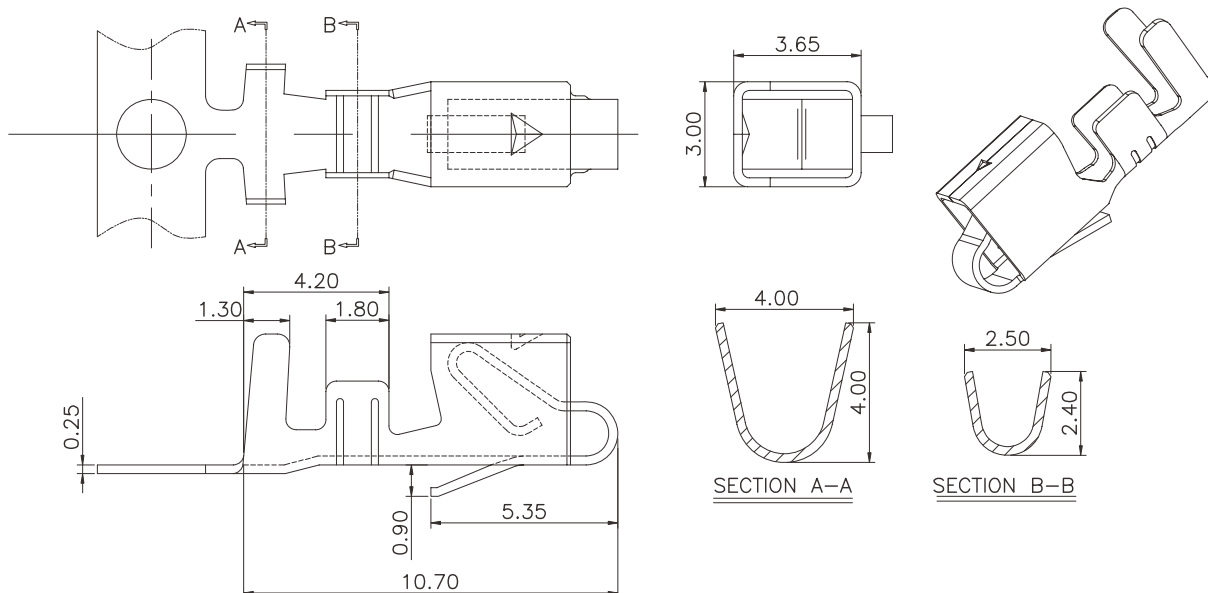

Ordering Information & Specifications

Unit: mm

Part No	Wire Range	Insulation O. D.	Material	Finish	Qty/reel
13962TOB-2	AWG #18-#24	3.00mm(max)	Brass	Tin-plated	3,000pcs

Note: * (o. A...) For contact JCTC

13962H00-NP


3.96mm pitch Single Row Housing

Reference Informations:

*Material: Nylon 66, UL94V-0

*Suitable JCTC 13962 series Terminal

*Mates with JCTC 13962 series Wafer

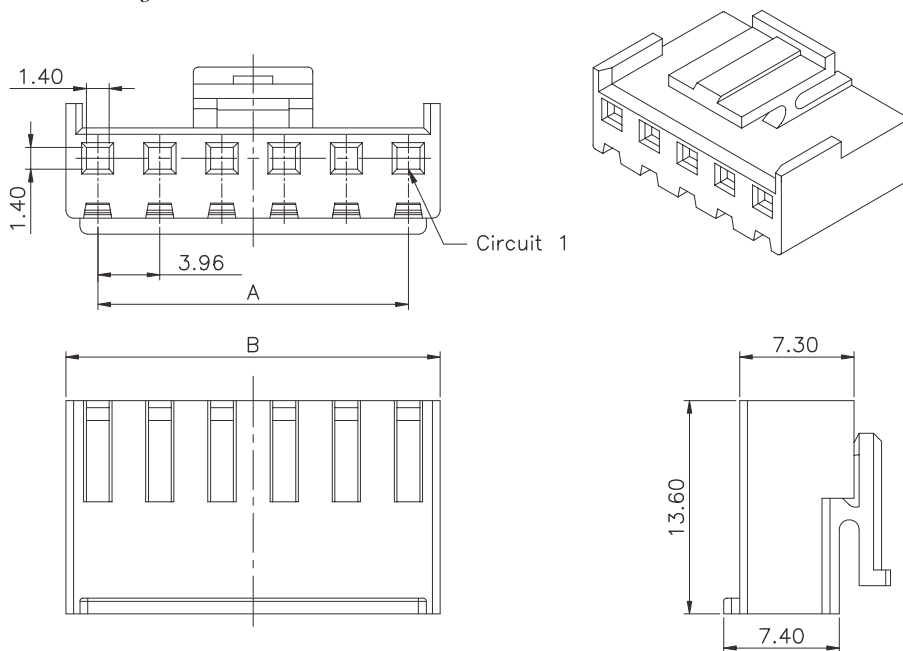

Dimensional Information:

Part No.	Dimensions	
	A	B
2P	3.96	8.02
3P	7.92	11.98
4P	11.88	15.94
5P	15.84	19.90
6P	19.80	23.86
7P	23.76	27.82
8P	27.72	31.78
9P	31.68	35.74
10P	35.64	39.70
11P	39.60	43.66
12P	43.56	47.62
13P	47.52	51.58
14P	51.48	55.54
15P	55.44	59.50
16P	59.40	63.46

Unit: mm

13962W00-NP





3.96mm pitch 180° Wafer

Reference Informations:

*Material: Pin: Brass/Tin-plated

Wafer: Nylon 66, UL94V-0

*Mates with JCTC 13962 series Housing

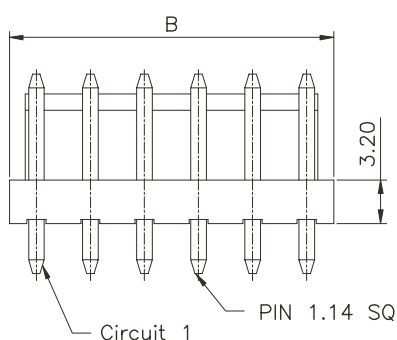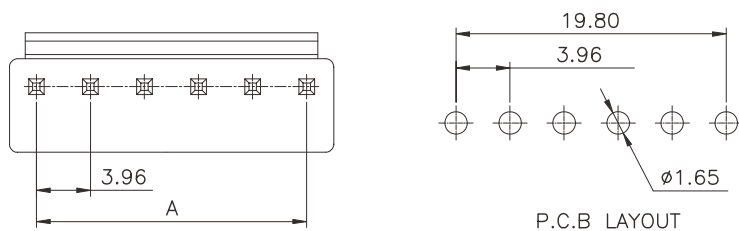

Dimensional Information:

Part No.	Dimensions	
	A	B
2P	3.96	7.92
3P	7.92	11.88
4P	11.88	15.84
5P	15.84	19.80
6P	19.80	23.76
7P	23.76	27.72
8P	27.72	31.68
9P	31.68	35.64
10P	35.64	39.60
11P	39.60	43.56
12P	43.56	47.52
13P	47.52	51.48
14P	51.48	55.44
15P	55.44	59.40

Unit: mm

13962W90-NP





3.96mm pitch 90° Wafer

Reference Informations:

*Material: Pin: Brass/Tin-plated

Wafer: Nylon 66, UL94V-0

*Mates with JCTC 13962 series Housing

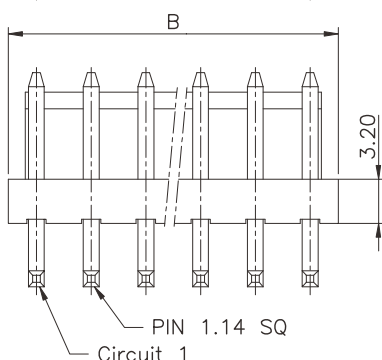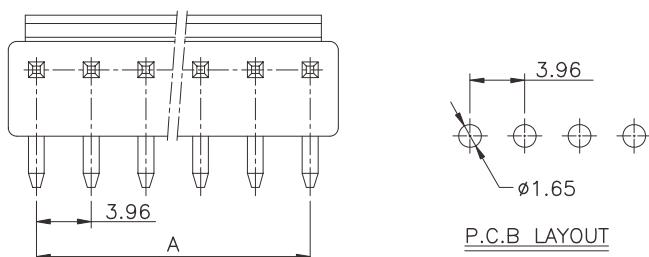

Dimensional Information:

Part No.	Dimensions	
	A	B
2P	3.96	7.92
3P	7.92	11.88
4P	11.88	15.84
5P	15.84	19.80
6P	19.80	23.76
7P	23.76	27.72
8P	27.72	31.68
9P	31.68	35.64
10P	35.64	39.60
11P	39.60	43.56
12P	43.56	47.52
13P	47.52	51.48
14P	51.48	55.44
15P	55.44	59.40

Unit: mm

13962W90-3PX-F-HF-001






3.96mm pitch 90° Wafer

Reference Informations:

*Material: Pin: Brass/Tin-plated

Wafer: Nylon 66, UL94V-0

*Mates with JCTC 13962 series Housing

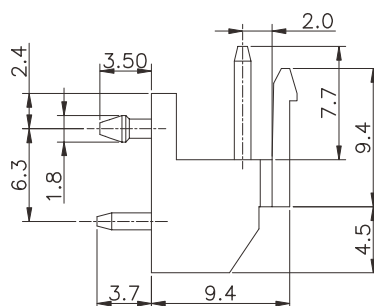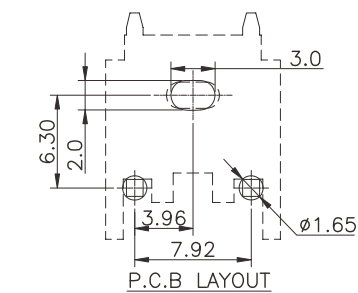

Unit: mm